

MIRO TR 24VDC SK Opto-coupler module IN: 48 VDC - OUT: 48 VDC / 2 A

Transistor 2 A
24 V DC
Screw terminals

Image



Vicarious picture

Approvals



Input

Voltage range ON	10...44 V DC
Voltage range OFF	0...3 V DC
Control current	6 mA

Output

Switching time ON/OFF	1/5 ms
-----------------------	--------

Commercial data

Net weight	24
Weight unit	gram
Basic unit	pc.
Customs tariff number	85414090
Unit (piece)	1
Limited value	1


Accessories

	Art.-No.
Wiring accessorie plug link	90961
Wiring accessorie red spacing 6,2 mm	90976
Wiring accessorie blue spacing 6,2 mm	90975
Wiring accessorie end cap red	90982
Wiring accessorie end cap blue	90980
Wiring accessorie 16 pole cross-section: 1 mm²	90977
Control systems Label plate Miro	90901

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 12/12

Circuit diagram

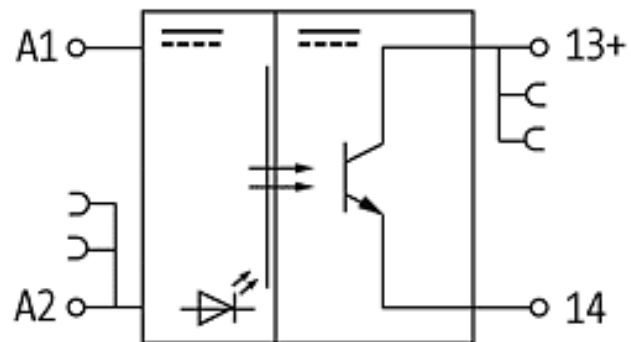

Dimension drawing

