

Quick coupling sockets/plugs

FESTO



Quick coupling sockets/plugs


Key features

FESTO

Mode of operation

Quick connection coupling, shut-off on one/both sides


Coupling



When coupling, the plug is pushed into the socket.

The plug engages automatically when it reaches a certain position.

Decoupling




The plug is unlocked by pressing the releasing sleeve.

When decoupling, it is important to make sure that the quick coupling plug is held until the coupling plug is fully exhausted.

Safety coupling


Coupling



When coupling, the plug is pushed into the socket.

The plug engages automatically when it reaches a certain position.

Decoupling



The releasing sleeve is first turned. This is to release the compressed air from the system.

The plug is then unlocked by pulling the releasing sleeve.

-  - Note

When inserting and releasing couplings, the maximum pressure should be 10 bar.

Quick coupling sockets/plugs

Product range overview

FESTO

Function	Version	Type	Brief description	Max. standard nominal flow rate [l/min]	Nominal size [mm]	→ Page/Internet
Quick connection coupling	Shut-off on one side					
		KD1/KS1	For standard applications, without safety function	44	1.5	5
		KD2/KS2		139	2.7	7
		KD3/KS3		666	5	10
		KD4/KS4		1,350	7.2	13
		KD5/KS5		2,043	13	16
	Shut-off on both sides					
		KD3-A-R/ KS3-A-R	Both ends are sealed during unlocking	666	5	18
		KD4-A-R/KS4-A-R		1,350	7.2	18
	Safety coupling		KDMS6	The compressed air is released from the system by turning the releasing sleeve. Only then can the coupling be unlocked	2,043	7.8
KDS6/KSS6			1,818			

Coupling/tubing combination options							
Tubing		Quick coupling socket/plug					
		KD1/KS1	KD2/KS2	KD3/KS3	KD4/KS4	KD5/KS5	KDS6/KSS6
Standard I.D.	Polyurethane						
	PU-2	■	–	–	–	–	–
	PU-3	–	■	–	–	–	–
	PU-4	–	■	■	■	–	–
	PU-6	–	–	■	■	–	–
	PU-9	–	–	–	■	–	■
	PU-13	–	–	–	–	■	■
	Nitrile rubber						
	P-6	–	–	–	■	–	–
	P-9	–	–	–	■	–	■
	P-13	–	–	–	–	■	–
	Polyamide						
	PP-3	–	■	–	–	–	–
	PP-4	–	■	■	■	–	–
	PP-6	–	–	■	■	–	–
Standard O.D.	Polyurethane						
	PUN-3	■	–	–	–	–	–
	PUN-4	–	■	–	–	–	–
	PUN-6	–	■	■	■	–	–
	PUN-8	–	–	■	■	–	–
	Polyamide						
	PAN-4	–	■	–	–	–	–
	PAN-6	–	■	■	■	–	–
	PAN-8	–	–	■	■	–	–
	Nitrile rubber with metal braiding (only with KS...-CX quick coupling plug)						
	PX-4	–	–	■	–	–	–
	PX-6	–	–	–	■	–	–
	PX-9	–	–	–	■	–	–

Quick coupling sockets/plugs

Product range overview

FESTO

Quick coupling socket/plug combination options												
Connection	Size 1		Size 2		Size 3 ¹⁾		Size 4 ¹⁾		Size 5		Size 6 ²⁾	
	Socket	Plug	Socket	Plug	Socket	Plug	Socket	Plug	Socket	Plug	Socket	Plug
Male thread												
M3	■	–	–	–	–	–	–	–	–	–	–	–
M5	–	–	■	■	–	–	–	–	–	–	–	–
G ¹ / ₈	–	–	–	–	■	■	–	–	–	–	–	■
G ¹ / ₄	–	–	–	–	■	■	■	■	–	–	■	■
G ³ / ₈	–	–	–	–	–	–	■	■	–	–	■	■
G ¹ / ₂	–	–	–	–	–	–	■	■	–	■	■	■
Female thread												
M5	–	–	■	■	–	–	–	–	–	–	–	–
G ¹ / ₈	–	–	–	–	■	■	–	–	–	–	–	–
G ¹ / ₄	–	–	–	–	■	■	■	■	–	–	■	■
G ³ / ₈	–	–	–	–	–	–	■	■	–	–	■	■
G ¹ / ₂	–	–	–	–	–	–	■	■	■	–	■	■
Quick connector with union nut												
CK-3	–	–	■	■	–	–	–	–	–	–	–	–
CK-4	–	–	■	■	■	■	–	■	–	–	–	–
CK-6	–	–	–	–	■	■	■	■	–	–	–	–
CK-9	–	–	–	–	–	–	■	■	–	–	■	■
CK-13	–	–	–	–	–	–	–	–	–	■	■	■
CX-4	–	–	–	–	–	■ ³⁾	–	–	–	–	–	–
CX-6	–	–	–	–	–	–	–	■ ³⁾	–	–	–	–
CX-9	–	–	–	–	–	–	–	■ ³⁾	–	–	–	–
Bulkhead quick connector												
CK-9-S	–	–	–	–	–	–	■	■	–	–	■	■
Barbed fitting												
CN-2	–	■	–	–	–	–	–	–	–	–	–	–
CN-4	–	–	■	■	–	–	–	–	–	–	–	–
CN-6	–	–	–	–	■	■	–	–	–	–	–	–
N-6	–	–	–	–	–	–	–	■	–	–	–	–
N-9	–	–	–	–	–	–	■	■	–	–	■	■
N-13	–	–	–	–	–	–	–	–	–	■	–	–
Barbed bulkhead connector												
CN-4-S	–	–	■	■	–	–	–	–	–	–	–	–
CN-6-S	–	–	–	–	■	■	–	–	–	–	–	–

1) Quick coupling socket, shut-off on both sides, KD-...-A-R, G¹/₈, G¹/₄ thread only

2) Quick coupling socket KDMS6, G¹/₄, G³/₈, G¹/₂ male thread only

3) For PX tubing only

Quick coupling sockets/plugs KD/KS, shut-off on one side


FESTO

Technical data

Quick connection coupling KD1/KS1



Normal size
1.5 mm



Technical data		
Operating medium		Filtered compressed air, lubricated or unlubricated
Operating pressure ¹⁾	[bar]	−0.95 ... +12
Ambient temperature	[°C]	−10 ... +60
Standard nominal flow rate ²⁾	[l/min]	Max. 44
Corrosion resistance classification	CRC ³⁾	1

1) Safety factor 2.5

2) Measured at p₁ = 6 bar and Δp = 1 bar

3) Corrosion resistance class 1 according to Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Weights [g]		
	With male thread M3	With barbed connector CN-2
Coupling socket	29	–
Coupling plug	–	4

Materials		
	Coupling socket	Coupling plug
Housing	Brass, nickel-plated	Brass, nickel-plated
Releasing sleeve	Brass, nickel-plated	–

Quick coupling sockets/plugs KD/KS, shut-off on one side

FESTO

Technical data

Dimensions		Download CAD data → www.festo.com
Coupling socket	Coupling plug	Insertion depth
Male thread	Barbed fitting	

Type	D1 Ø	D2	L1	L2	1/8 1
Coupling socket					
M3	6.5	M3	18.5	4.6	6
Coupling plug					
CN-2	4	–	12	4.6	–

Ordering data			
Connection	Coupling socket		Coupling plug
	Part No.	Type	Part No. Type
Male thread			
M3	151995	KD1-M3-A	–
Barbed fitting			
CN-2	–		151996 KS1-CN-2

Quick coupling sockets/plugs KD/KS, shut-off on one side

FESTO

Technical data

Quick connection coupling KD2/KS2

Ø Nominal size
2.7 mm



Note

All quick coupling socket types of the same size are compatible with all plugs of this size.



Technical data	
Operating medium	Filtered compressed air, lubricated or unlubricated
Operating pressure ¹⁾ [bar]	−0.95 ... +12
Ambient temperature [°C]	−10 ... +60
Standard nominal flow rate ²⁾ [l/min]	Max. 139
Corrosion resistance classification CRC ³⁾	1

1) Safety factor 2.5

2) Measured at p₁ = 6 bar and Δp = 1 bar

3) Corrosion resistance class 1 according to Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Weights [g]				
	Male thread	Female thread	Quick connector	
	M5	M5	CK-3	CK-4
Quick coupling sockets	10	12	11	16
Quick coupling plugs	5	5	4	11




Weights [g]		
	Barbed fitting	Barbed bulkhead connector
	CN4	CN-4-S
Quick coupling sockets	11	21
Quick coupling plugs	5	16


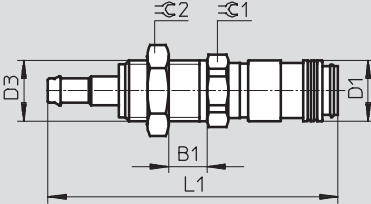
Materials		
	Quick coupling socket	Quick coupling plug
Housing	Brass, nickel-plated	Brass, nickel-plated
Releasing sleeve	Brass, nickel-plated	–




Quick coupling sockets/plugs KD/KS, shut-off on one side




FESTO

Technical data

Dimensions – Quick coupling socket			Download CAD data → www.festo.com
Male thread	Female thread	Quick connector	
			

Barbed fitting	Barbed bulkhead connector	
		

Dimensions – Quick coupling plug			Download CAD data → www.festo.com
Male thread	Female thread	Quick connector	
			

Barbed fitting	Barbed bulkhead connector	Insertion depth
		

Type	B1	D1 Ø	D2	D3	L1		L2	≈ 1		≈ 2
					Quick coupling socket	Quick coupling plug		Quick coupling socket	Quick coupling plug	
Male thread										
M5	–	10	M5	–	26.25	18.2	7.95	9	9	–
Female thread										
M5	–	10	M5	–	29.05	20	7.95	9	7	–
Quick connector with union nut										
CK-3	–	10	–	–	32.55	24	7.95	9	7	8
CK-4					35.75	27.2		11	11	12
Barbed fitting										
CN-4	–	10	–	–	33.25	25.4	7.95	11	7	–
Barbed bulkhead connector										
CN-4-S	1 ... 10	10	–	M10x1	47.75	39.7	7.95	11	11	13

Quick coupling sockets/plugs KD/KS, shut-off on one side

FESTO

Technical data

Ordering data				
Type	Quick coupling socket		Quick coupling plug	
	Part No.	Type	Part No.	Type
Male thread				
M5	4087	KD2-M5-A	531658	KS2-M5-A
Female thread				
M5	531620	KD2-M5-I	531660	KS2-M5-I
Quick connector with union nut				
CK-3	531621	KD2-CK-3	4091	KS2-CK-3
CK-4	531622	KD2-CK-4	4090	KS2-CK-4
Barbed fitting				
CN-4	531623	KD2-CN-4	531663	KS2-CN-4
Barbed bulkhead connector				
CN-4-S	531624	KD2-CN-4-S	531664	KS2-CN-4-S

Quick coupling sockets/plugs KD/KS, shut-off on one side

FESTO

Technical data

Quick connection coupling KD3/KS3

Ø - Nominal size
5 mm

Note
All quick coupling socket types of the same size are compatible with all plugs of this size.



Technical data	
Operating medium	Filtered compressed air, lubricated or unlubricated
Operating pressure ¹⁾ [bar]	-0.95 ... +12
Ambient temperature [°C]	-10 ... +60
Standard nominal flow rate ²⁾ [l/min]	Max. 666
Corrosion resistance classification CRC ³⁾	1

1) Safety factor 2.5

2) Measured at p₁ = 6 bar and Δp = 1 bar

3) Corrosion resistance class 1 according to Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Weights [g]	Male thread		Female thread	
	G ¹ / ₈	G ¹ / ₄	G ¹ / ₈	G ¹ / ₄
Quick coupling sockets	28	35	32	47
Quick coupling plugs	13	23	16	27

Weights [g]	Quick connector			Barbed fitting	Barbed bulkhead connector
	CK-4	CK-6	CX-4	CN-6	CN-6-S
Quick coupling sockets	31	32	–	27	44
Quick coupling plugs	16	21	16	8	32




Materials	
	Quick coupling socket
Housing	Brass, nickel-plated
Releasing sleeve	Brass, nickel-plated
	Quick coupling plug
Housing	Brass, nickel-plated ¹⁾
Releasing sleeve	–


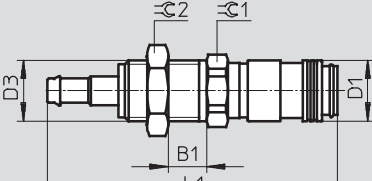
1) KS...-CX quick coupling plug: brass




Quick coupling sockets/plugs KD/KS, shut-off on one side




FESTO

Technical data

Dimensions – Quick coupling socket			Download CAD data → www.festo.com
Male thread	Female thread	Quick connector	
			

Barbed fitting	Barbed bulkhead connector	
		

Dimensions – Quick coupling plug			Download CAD data → www.festo.com
Male thread	Female thread	Quick connector	
			

Barbed fitting	Barbed bulkhead connector	Insertion depth
		

Type	B1	D1 Ø	D2	D3	L1		L2	≈C 1		≈C 2
					Quick coupling socket	Quick coupling plug		Quick coupling socket	Quick coupling plug	
Male thread										
G $\frac{1}{8}$	–	16	G $\frac{1}{8}$	–	36	25	13.6	14	13	–
G $\frac{1}{4}$			G $\frac{1}{4}$	–	37.6	27.6		17	17	
Female thread										
G $\frac{1}{8}$	–	16	G $\frac{1}{8}$	–	38.2	28	13.6	14	13	–
G $\frac{1}{4}$			G $\frac{1}{4}$	–	45.2	32.6	13.6	17	17	
Quick connector with union nut										
CK-4	–	16	–	–	43.1	34.5	13.6	14	12	12
CK-6					43.2	34.6			14	14
CX-4	–	–	–	–	–	43	–	–	14	14
Barbed fitting										
CN-6	–	16	9 d10	–	43.2	28.6	13.6	14	–	–
Barbed bulkhead connector										
CN-6-S	1,1 ... 10	16	–	M12x1	58.2	48.6	13.6	17	17	17

Quick coupling sockets/plugs KD/KS, shut-off on one side

FESTO

Technical data

Ordering data			
	Quick coupling socket		Quick coupling plug
	Part No.	Type	Part No. Type
Male thread			
G $\frac{1}{8}$	2142	KD3- $\frac{1}{8}$ -A	3492 KS3- $\frac{1}{8}$ -A
G $\frac{1}{4}$	531626	KD3- $\frac{1}{4}$ -A	531666 KS3- $\frac{1}{4}$ -A
Female thread			
G $\frac{1}{8}$	531627	KD3- $\frac{1}{8}$ -I	531668 KS3- $\frac{1}{8}$ -I
G $\frac{1}{4}$	531628	KD3- $\frac{1}{4}$ -I	531669 KS3- $\frac{1}{4}$ -I
Quick connector with union nut			
CK-4	531629	KD3-CK-4	3326 KS3-CK-4
CK-6	531630	KD3-CK-6	3478 KS3-CK-6
CX-4	–		4047 KS3-CX-4
Barbed fitting			
CN-6	531631	KD3-CN-6	531672 KS3-CN-6
Barbed bulkhead connector			
CN-6-S	531632	KD3-CN-6-S	531673 KS3-CN-6-S

Quick coupling sockets/plugs KD/KS, shut-off on one side

FESTO

Technical data

Quick connection coupling KD4/KS4

- Releasing sleeve made from polymer material

Ø - Nominal size
7.2 mm



Note

All quick coupling socket types of the same size are compatible with all plugs of this size.



Technical data	
Operating medium	Filtered compressed air, lubricated or unlubricated
Operating pressure ¹⁾ [bar]	-0.95 ... +12
Ambient temperature [°C]	-10 ... +60
Standard nominal flow rate ²⁾ [l/min]	Max. 1,350
Corrosion resistance classification CRC ³⁾	1

1) Safety factor 2.5

2) Measured at p₁ = 6 bar and Δp = 1 bar

3) Corrosion resistance class 1 according to Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

	Male thread			Female thread		
	G ¹ / ₄	G ³ / ₈	G ¹ / ₂	G ¹ / ₄	G ³ / ₈	G ¹ / ₂
Quick coupling sockets	57	62	78	88	82	86
Quick coupling plugs	21	29	55	31	32	57

	Quick connector					Bulkhead quick connector	Barbed fitting	
	CK-4	CK-6	CK-9	CX-6	CX-9	CK-9-S	N-6	N-9
Quick coupling sockets	–	63	71	–	–	97	–	57
Quick coupling plugs	26	26	26	34	61	69	15	18




Materials		
	Quick coupling socket	Quick coupling plug
Housing	Brass, nickel-plated	Brass, nickel-plated ¹⁾
Releasing sleeve	Polypropylene	–



1) KS...-CX quick coupling plug: brass




Quick coupling sockets/plugs KD/KS, shut-off on one side




FESTO

Technical data

Dimensions – Quick coupling socket		Download CAD data → www.festo.com
Male thread	Female thread	Quick connector
		

Bulkhead quick connector	Barbed fitting
	

Dimensions – Quick coupling plug		Download CAD data → www.festo.com
Male thread	Female thread	Quick connector
		

Bulkhead quick connector	Barbed fitting	Insertion depth
		

Quick coupling sockets/plugs KD/KS, shut-off on one side

FESTO

Technical data

Type	B1	D1 Ø	D2	D3	L1		L2	≈ 1		≈ 2	≈ 3
					Quick coupling socket	Quick coupling plug		Quick coupling socket	Quick coupling plug		
Male thread											
G¼	–	26.4	G¼	–	40.5	32.5	14.95	22	17	–	–
G¾			G¾		41.5	34			19		
G½			G½		43	37.5			24		
Female thread											
G¼	–	26.4	G¼	–	46	38.5	14.95	22	17	–	–
G¾			G¾		47.5	39.5			19		
G½			G½		50.5	44			24		
Quick connector with union nut											
CK-4	–	–	–	–	–	40.2	14.95	–	17	12	–
CK-6		26.4			46.4	40.3				14	
CK-9					49.8	43.7					
CX-6		–			–	53	–	–	17	17	
CX-9						60			19	22	
Bulkhead quick connector with union nut											
CK-9-S	1,2 ... 18,2	26.4	–	M16x1	64.8	57.7	14.95	22	22	19	22
Barbed fitting											
N-6	–	26.4	12	–	–	47	14.95	–	–	–	–
N-9					56.2			21			

Ordering data					
		Quick coupling socket		Quick coupling plug	
		Part No.	Type	Part No.	Type
Male thread					
G¼	2143	KD4-¼-A		2154	KS4-¼-A
G¾	2144	KD4-¾-A			KS4-¾-A
G½	2145	KD4-½-A			531676
Female thread					
G¼	531636	KD4-¼-I		531678	KS4-¼-I
G¾	531637	KD4-¾-I		531679	KS4-¾-I
G½	531638	KD4-½-I		531680	KS4-½-I
Quick connector with union nut					
CK-4	—		2150	KS4-CK-4	
CK-6	531639	KD4-CK-6		2151 KS4-CK-6	
CK-9	531640	KD4-CK-9		531683 KS4-CK-9	
CX-6	—			4048 KS4-CX-6	
CX-9	—			4049 KS4-CX-9	
Bulkhead quick connector with union nut					
CK-9-S	531642	KD4-CK-9-S		531686	KS4-CK-9-S
Barbed fitting					
N-6	—		2152	KS4-N-6	
N-9	531641	KD4-N-9		2153 KS4-N-9	

Quick coupling sockets/plugs KD/KS, shut-off on one side

FESTO

Technical data

Quick connection coupling KD5/KS5

Ø - Nominal size
13 mm

 Note
 All quick coupling socket types of the same size are compatible with all plugs of this size.



Technical data	
Operating medium	Filtered compressed air, lubricated or unlubricated
Operating pressure ¹⁾ [bar]	0 ... +12
Ambient temperature [°C]	-10 ... +60
Standard nominal flow rate ²⁾ [l/min]	Max. 2 043
Corrosion resistance CRC ³⁾ classification	1

1) Safety factor 2.5

2) Measured at p₁ = 6 bar and Δp = 1 bar

3) Corrosion resistance class 1 according to Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Weights [g]				
	Male thread	Female thread	Quick connector	Barbed fitting
	G ¹ / ₂	G ¹ / ₂	CK-13	N-13
Quick coupling socket	–	413	–	–
Quick coupling plug	255	–	251	256

Materials		
	Quick coupling socket	Quick coupling plug
Housing	Galvanised steel	Galvanised steel
Releasing sleeve	Galvanised steel	–

 Note
 The non-return function means that the direction of flow must always follow the direction of the arrow.

Quick coupling sockets/plugs KD/KS, shut-off on one side


FESTO

Technical data

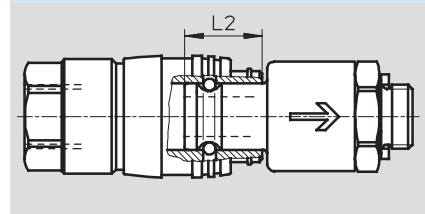
Dimensions – Quick coupling socket

Download CAD data → www.festo.com

Female thread




Insertion depth




Dimensions – Quick coupling plug

Download CAD data → www.festo.com


Male thread



Quick connector



Barbed fitting



Type	D1 Ø	D2	L1		L2	≡ 1		≡ 2
			Quick coupling socket	Quick coupling plug		Quick coupling socket	Quick coupling plug	
Female thread								
G½	40	G½	78	–	25.5	32	–	–
Male thread								
G½	36	G½	–	74.9	25.5	–	32	–
Quick connector with union nut								
CK-13	36	–	–	83.2	25.5	–	32	24
Barbed fitting								
N-13	36	–	–	94	25.5	–	32	–

Ordering data

	Quick coupling sockets		Quick coupling plugs	
	Part No.	Type	Part No.	Type
Female thread				
G½	4088	KD5-½-1	–	–
Male thread				
G½	–	–	531687	KS5-½-A
Quick connector with union nut				
CK-13	–	–	4096	KS5-CK-13
Barbed fitting				
N-13	–	–	4089	KS5-N-13

Quick coupling sockets/plugs KD/KS, shut-off on both sides

FESTO

Technical data

Quick connection coupling

KD3-A-R/KS3-A-R

- After decoupling both parts are tight

 Note
Only coupling plugs and sockets of the same function and size may be combined.

 Nominal size
5 mm



KD3-...-A-R



KS3-...-A-R

 Nominal size
7.2 mm



KD4-...-A-R



KS4-...-A-R

Technical data		
	KD3/KS3	KD4/KS4
Operating medium	Filtered compressed air, lubricated or unlubricated	
Operating pressure ¹⁾	[bar]	-0.95 ... +12
Ambient temperature	[°C]	-10 ... +60
Standard nominal flow rate ²⁾	[l/min]	Max. 666
Corrosion resistance classification	CRC ³⁾	1

1) Safety factor 2.5

2) Measured at p₁ = 6 bar and Δp = 1 bar

3) Corrosion resistance class 1 according to Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.




Weights [g]		
	KD3/KS3	KD4/KS4
	G ¹ / ₈	G ¹ / ₄
Quick coupling socket	28	58
Quick coupling plug	32	46

Materials				
	Quick coupling socket	Quick coupling plug	Quick coupling socket	Quick coupling plug
	KD3	KS3	KD4	KS4
Housing	Brass		Brass	
Releasing sleeve	Brass	–	Polypropylene	–

Quick coupling sockets/plugs KD/KS, shut-off on both sides

FESTO

Technical data

Dimensions		Download CAD data → www.festo.com
Quick coupling socket	Quick coupling plug	Insertion depth
Male thread		
		

Type	D1 Ø	D2	L1		L2	≈ 1	
			Quick coupling socket	Quick coupling plug		Quick coupling socket	Quick coupling plug
male thread							
G1/8	16	G1/8	36	39.8	13.6	14	14
G1/4	26.4	G1/4	40.5	42.5	14.95	22	22

Ordering data				
Connection	Quick coupling socket		Quick coupling plug	
	Part No.	Type	Part No.	Type
G $\frac{1}{8}$	531659	KD3- $\frac{1}{8}$ -A-R	531667	KS3- $\frac{1}{8}$ -A-R
G $\frac{1}{4}$	531694	KD4- $\frac{1}{4}$ -A-R	531677	KS4- $\frac{1}{4}$ -A-R

Quick coupling sockets/plugs KDMS/KDS/KSS, shut-off on one side

FESTO

Technical data

Safety coupling

- Releasing sleeve made from brass material

Ø - Nominal size
7.8 mm

⌀ - Note

All quick coupling socket types of the same size are compatible with all plugs of this size.



KDMS



KSS

Safety coupling

- Releasing sleeve made from polymer material

Ø - Nominal size
7.8 mm

⌀ - Note

All quick coupling socket types of the same size are compatible with all plugs of this size.



KDS



KSS

Technical data		
	KDMS	KDS/KSS
Operating medium	Filtered compressed air, lubricated or unlubricated	
Operating pressure ¹⁾ [bar]	0 ... +12	-0.5 ... +12
Ambient temperature [°C]	-10 ... +60	
Standard nominal flow rate ²⁾ [l/min]	Max. 2,043	Max. 1,818
Corrosion resistance classification CRC ³⁾	1	
Approval	TÜV	

1) Safety factor 2.5

2) Measured at p₁ = 6 bar and Δp = 1 bar

3) Corrosion resistance class 1 according to Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Weights [g]							
	Male thread				Female thread		
	G ¹ / ₈	G ¹ / ₄	G ³ / ₈	G ¹ / ₂	G ¹ / ₄	G ³ / ₈	G ¹ / ₂
Quick coupling sockets KDMS-...	-	167	170	175	-	-	-
Quick coupling sockets KDS-...	-	93	96	111	125	115	121
Quick coupling plugs	19	20	27	50	28	29	49

Weights [g]				
	Quick connector		Bulkhead quick connector	Barbed fitting
	CK-9	CK-13	CK-9-S	N-9
Quick coupling sockets KDMS-...	-	-	-	-
Quick coupling sockets KDS-...	104	121	122	97
Quick coupling plugs	37	50	64	17

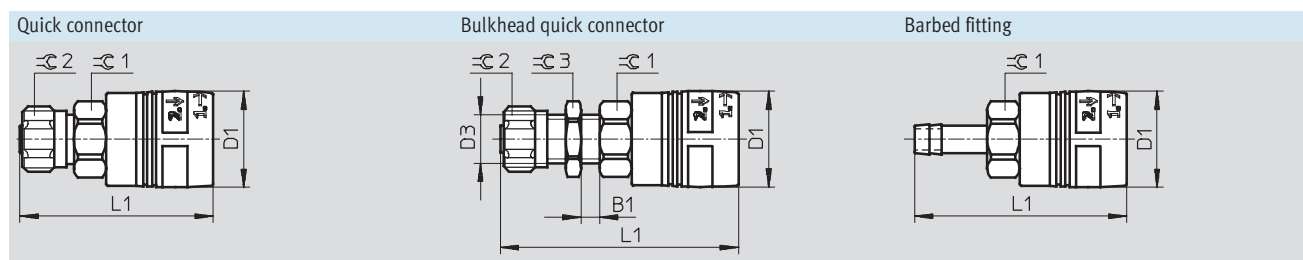
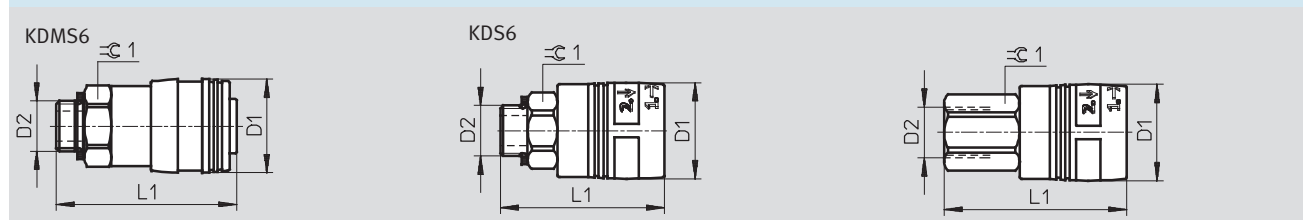
Materials			
	Quick coupling socket		Quick coupling plug
	KDMS	KDS	KSS
Housing	Brass, nickel-plated	Brass, nickel-plated	Hardened steel
Releasing sleeve	Brass, nickel-plated	Polyacetal	-

Quick coupling sockets/plugs KDMS/KDS/KSS, shut-off on one side

FESTO

Technical data

Dimensions – Quick coupling socket			Download CAD data → www.festo.com
Male thread		Female thread	



Type	B1	D1 Ø	D2	D3	L1	≈C 1	≈C 2	≈C 3
Male thread quick coupling socket KDMS6								
G¼	–	31	G¼	–	59	24	–	–
G¾			G¾		60			
G½			G½		61.5			
Male thread quick coupling socket KDS6								
G¼	–	31.6	G¼	–	53	22	–	–
G¾			G¾		54	22		
G½			G½		55.5	24		
Female thread								
G¼	–	31.6	G¼	–	60	22	–	–
G¾			G¾		60	22		
G½			G½		63	24		
Quick connector with union nut								
CK-9	–	31.6	–	–	63.5	22	19	–
CK-13					64.5	24	24	
Bulkhead quick connector with union nut								
CK-9-S	1,2 ... 18,2	31.6	–	M16x1	78.5	22	19	22
Barbed fitting								
N-9	–	31.6	12	–	69.7	22	–	–

Quick coupling sockets/plugs KDMS/KDS/KSS, shut-off on one side

Technical data

FESTO

Dimensions – Quick coupling plug			Download CAD data → www.festo.com
Male thread	Female thread	Quick connector	

Bulkhead quick connector	Barbed fitting	Insertion depth

Type	B1	D2	D3	L1	L2	≈ 1	≈ 2	≈ 3
Male thread								
G1/8	-	G1/8	-	30.5	19.1	13	-	-
G1/4		G1/4		32.5		17		
G3/8		G3/8		34		19		
G1/2		G1/2		37.5		24		
Female thread								
G1/4	-	G1/4	-	38.5	19.1	17	-	-
G3/8		G3/8		39.5		19		
G1/2		G1/2		44		24		
Quick connector with union nut								
CK-9	-	-	-	43.7	19.1	19	19	-
CK-13				45.2		24	24	
Bulkhead quick connector with union nut								
CK-9-S	1,2 ... 18,2	-	M16x1	57.5	19.1	22	19	22
Barbed fitting								
N-9	-	12	-	47	19.1	-	-	-

Quick coupling sockets/plugs KDMS/KDS/KSS, shut-off on one side

FESTO

Technical data

Ordering data			
Connection	Quick coupling socket		Quick coupling plug
	Part No.	Type	Part No. Type
Male thread, releasing sleeve made from brass material			
G $\frac{1}{4}$	151776	KDMS6- $\frac{1}{4}$ -A	151779 KSS6- $\frac{1}{4}$ -A
G $\frac{3}{8}$	151777	KDMS6- $\frac{3}{8}$ -A	151780 KSS6- $\frac{3}{8}$ -A
G $\frac{1}{2}$	151778	KDMS6- $\frac{1}{2}$ -A	531693 KSS6- $\frac{1}{2}$ -A
Male thread, releasing sleeve made from polymer material			
G $\frac{1}{8}$	–		151781 KSS6- $\frac{1}{8}$ -A
G $\frac{1}{4}$	531647	KDS6- $\frac{1}{4}$ -A	151779 KSS6- $\frac{1}{4}$ -A
G $\frac{3}{8}$	531648	KDS6- $\frac{3}{8}$ -A	151780 KSS6- $\frac{3}{8}$ -A
G $\frac{1}{2}$	531649	KDS6- $\frac{1}{2}$ -A	531693 KSS6- $\frac{1}{2}$ -A
Female thread			
G $\frac{1}{4}$	531650	KDS6- $\frac{1}{4}$ -I	531695 KSS6- $\frac{1}{4}$ -I
G $\frac{3}{8}$	531651	KDS6- $\frac{3}{8}$ -I	531696 KSS6- $\frac{3}{8}$ -I
G $\frac{1}{2}$	531652	KDS6- $\frac{1}{2}$ -I	531697 KSS6- $\frac{1}{2}$ -I
Quick connector with union nut			
CK-9	531653	KDS6-CK-9	531698 KSS6-CK-9
CK-13	531654	KDS6-CK-13	531699 KSS6-CK-13
Bulkhead quick connector with union nut			
CK-9-S	531656	KDS6-CK-9-S	531701 KSS6-CK-9-S
Barbed fitting			
N-9	531655	KDS6-N-9	531700 KSS6-N-9

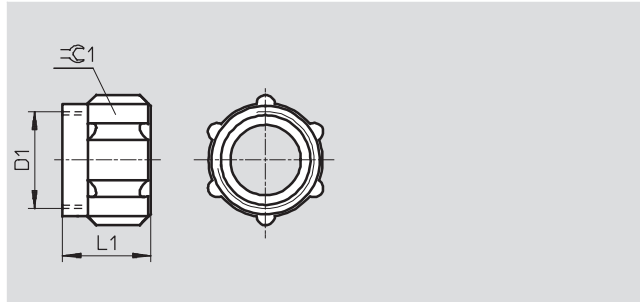
Union nuts MCK

Accessories

FESTO

Union nut MCK¹⁾
for quick connector

Material:
Wrought aluminium alloy
Conforms to RoHS



Ordering data						
Nominal size [mm]	D1	L1	⌀ 1	Weight [g]	Part No.	Type
3	M6x0.75	8.5	8	0.6	533672	MCK-PK-3-KD
4	M10x1	11	12	1.6	533673	MCK-PK-4-KD
6	M12x1	11	14	1.9	533674	MCK-PK-6-KD
9	M16x1	14.4	19	5	533675	MCK-PK-9-KD
13	M22x1	18	24	8	533676	MCK-PK-13-KD

- 1) Corrosion resistance class 1 according to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.