

Questionnaire for ANHEL® pumping unit selection

Dear partners, to ensure the most accurate selection of equipment matching your requirements, please answer the questions below or send us a technical specification containing all the required data.

If you have any difficulties or questions while completing this questionnaire, please call +7 (812) 416-4500 — our specialists will gladly assist you.

Contact details

Company *

Full name *

Position *

Email *

Contact phone *

City *

How did you hear about us?

- ☐ Yandex / Google ads
- ☐ Yandex / Google search
- ☐ Social networks
- ☐ Recommendation from a colleague
- ☐ Already familiar, worked with us before
- ☐ Other

General information

Facility name and location



System

- ☐ water supply
 - ☐ firefighting
 - ☐ heating
 - ☐ air conditioning
 - ☐ combined system (firefighting + water supply)
 - ☐ other
 - ☐ indoor fire-water riser (VPV)
 - ☐ automatic fire-suppression system (APT)
 - ☐ closed loop
 - ☐ open loop

Flow rate

Required flow rate, m³/hJockey-pump flow rate, m³/h

Combined system

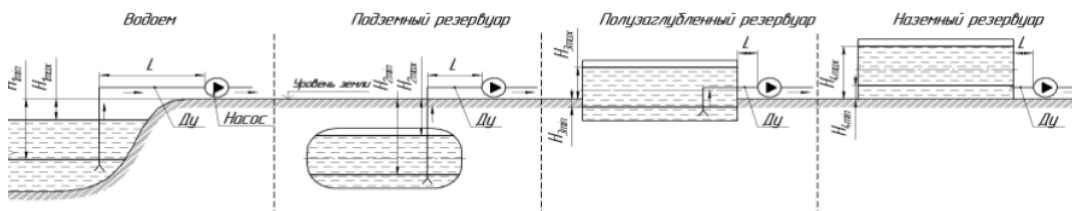
Flow rate, water supply, m³/hFlow rate, firefighting, m³/h

Head

Guaranteed supply pressure, m H₂O

Water intake from a pond or tank

- ☐ Pond / open water ☐ Underground tank ☐ Semi-buried tank ☐ Above-ground tank

Hmin, m H₂O $H_{\max}, \text{ m H}_2\text{O}$ Required pumping-unit head, m H₂O *

* = Required system head – Guaranteed supply pressure

Required jockey-pump head, m H₂O

Combined system

Required pumping-unit head, water supply, m H₂ORequired pumping-unit head, firefighting, m H₂O

Maximum system pressure, bar

Pumped fluid
(if not clean water, specify concentration)

Fluid temperature, t °C

Number of duty pumps
(providing the required flow)

Number of standby pumps

Control

- ☐ VFD with PLC
☐ VFD per pump with PLC
☐ VFD without PLC

- ☐ DOL / relay with PLC
☐ DOL / relay with PLC + soft starter

Motorized-valve control and switching

- ☐ Yes ☐ No

Number of valves

Valve brand and type

Options

- ☐ single power input per pump (no ATS)
☐ two power inputs with ATS
☐ outdoor control cabinet (UKHL1, UKHL2)
☐ limit switches for VPV fire-water pump set
☐ different inlet / outlet manifold diameters

Communication

- ☐ Profibus ☐ Modbus ☐ Ethernet ☐ GSM
☐ Other

Modular skid in an enclosure

- container ☐ tank ☐ fiberglass ☐ steel ☐
vertical ☐ horizontal ☐

Additional information

Important! Profit LLC accepts no responsibility for the accuracy of the source data provided in this questionnaire for equipment selection.

If the customer declines to complete this questionnaire, this is deemed acceptance of all technical characteristics defined by the type designation stated in the order in accordance with the ANHEL® catalogue, and confirmation that the product requires no additional features.