





NATURAL

HONED

Con il cemento è nata la città moderna poiché con esso ogni tipo di costruzione è diventata possibile. Grazie al suo utilizzo oggi viviamo in spazi più grandi e sicuri.

Le grandi opere contemporanee, da Le Corbousier fino agli architetti dei giorni nostri, sono realizzate grazie a questa importante materia duttile e resistente. Da un'intensa ricerca tra gli spazi industriali che ci circondano è nata la serie CONCRETE JUNGLE, un gres porcellanato versatile dalle tonalità essenziali proprie del cemento urbano. Un prodotto tecnico e di grande effetto, caratterizzato da un'originale grafica e da due affascinanti finiture dal mood contemporaneo e di design perfette per ogni ambiente.

Modern cities come from concrete because it has made any kind of building possible. Thanks to its use, we live in larger and safer places.

Great contemporary architecture, from the works of Le Corbusier to those of the architects of today, has been created using this adaptable and resistant material.

Following extensive research on the industrial spaces that surround us, we have created the CONCRETE JUNGLE series, versatile porcelain stoneware with the essential tones of urban concrete.

A technical product with a great appeal, characterised by original patterns and by two particularly attractive finishes offering a truly contemporary mood that is ideal for any environment.



















FACTORY-56 Honed cm 60X60





















SCHEMI DI POSA LAYING SOLUTIONS

MODULO "A" "A" MODULE



cm 60x60 (1 pz/pcs)	67%
cm 30x60 (1 pz/pcs)	33%

MODULO "B" "B" MODULE

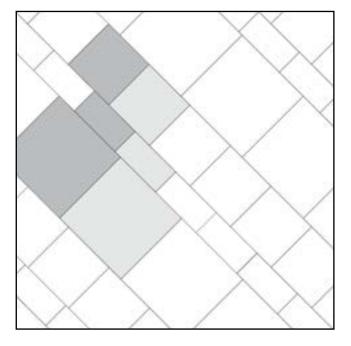

cm 90x90 (1 pz/pcs)	60%
cm 60x60 (1 pz/pcs)	27%
cm 30x60 (1 pz/pcs)	13%

TABELLE CALIBRI SIZE TABLES

90x90 RETT.	
CALIBRO CALIBRE	W*(mm)
0	901,0x901,0
Р	898,0x898,0
Q	895,0x895,0

60x60 RETT.	
CALIBRO CALIBRE	W*(mm)
0	600,0x600,0
P	598,0x598,0
Q	596,0x596,0
R	595,0x5950

30x60 RETT.	
CALIBRO CALIBRE	W*(mm)
0	299,0x600,0
Р	298,0x598,0
Q	297,0x596,0
R	296,0x595,0



CARATTERISTICHE TECNICHE **TECHNICAL FEATURES**

RESISTENZA ALLO SCIVOLAMENTO SLIPPERING RESISTANCE

R10 NATURAL - R9 HONED
B (A+B) NATURAL
μ > 0,40
DCOF ≥ 0,42
CLASE 1 NATURAL

CARICO DI ROTTURA (S) - Valore m	edio
BREAKING STRENGHT (S) - Average	e value

ISO 10545-4	≥ 220 kg (≥ 2150 N) 10 mm
	≥ 310 kg (≥ 3040 N) 11 mm
ASTM C 648	≥ 450 lbf 10 mm - ≥ 650 lbf 11 mm

RESISTENZA ALLA FLESSIONE - Valore medio BENDING STRENGHT - Average value

≥ 510 kg/cm² (≥ 50 N/mm²) ISO 10545-4

RESISTENZA ALL'ABRASIONE PROFONDA - Valore medio

DEEP ABRASION RESISTANCE - Average value

ISO 10545-6 ≤ 145 mm³

RESISTENZA ALLE MACCHIE STAIN RESISTANCE

ISO 10545-14 **CLASSE 5**

RESISTENZA ALL'ATTACCO CHIMICO RESISTANCE TO CHEMICAL ETCHING

No acido fluoridrico e derivati Not resistant to hydrofluoric acid and derivatives ISO 10545-13 **ULA-UHA**

ASSORBIMENTO D'ACQUA WATER ABSORPTION

ISO 10545-3 ≤ 0,1%

RESISTENZA AL GELO FROST RESISTANCE

INGELIVO - FROST PROOF ISO 10545-12

STONALIZZAZIONE DESHADING

ANSI A137.1 **V3**

PULIBILITÀ PULIBILITY

VISIBILITÀ DELLE IMPRONTE - Metodo Blustyle

Questa classificazione specifica il grado di visibilità delle impronte rilasciate sul pavimento dopo il passaggio con scarpe sporche di polvere.

- A Impronta non visibile
- **B** Impronta poco visibile
- C Impronta molto visibile. Ideale per rivestimenti e consigliato per pavimenti solo in ambienti residenziali.

TREAD MARK VISIBILITY - Blustyle method

This classification specifies the visibility degree of the tread marks left on the floor after walking with shoes dirty of dust.

- A Tread mark not visibleB Tread mark not very visible.
- C Tread mark very visible. Ideal for wall installation and recommended for floor installation in residential areas only.

В

FACILITÀ DI PULIZIA - Metodo Blustvle

Il metodo consiste nel classificare il grado di facilità nella rimozione dello sporco generico mediante pulizia manuale con detergente debole.

Grado 1 - Molto facile, nessuna resistenza dello sporco, rimozione immediata. **Grado 2** - Facile, leggera resistenza dello sporco, rimozione veloce.

Grado 3 - Meno facile, maggiore resistenza dello sporco, rimozione lenta. Si consiglia detergente forte. Ideale per rivestimenti e consigliato per pavimenti solo in ambienti residenziali.

CLEANING EASINESS - Blustyle method

The method consists in classifying the easiness grade in removing general dirt by manual cleaning with mild detergent.

Grade 1 - Very easy, no resistance of the dirt, immediate removal.

Grade 2 - Easy, light resistance of the dirt, fast removal.

Grade 3 - Less easy, higher resistance of the dirt, slow removal. A strong detergent is recommended. Ideal for wall installation and recommended for floor installation in residential areas only.

2

CERTIFICAZIONI **CERTIFICATIONS**



Le DOP sono disponibili sul sito internet www.blustyle.it DOP are available on the website www.blustyle.it



Sistema di gestione della qualità siti produttivi Quality management system of production sites



Sistema di gestione ambientale siti produttivi Environmental management system of production sites










Blustyle, tramite la holding Panariagroup Industrie Ceramiche S.p.A., è membro dello U.S. Green Building Council e del Green **Building Council Italia**

Blustyle, through Panariagroup Industrie Ceramiche S.p.A. holding, is a member of the U.S.Green Building Council and of the Italian Green Building Council.









MISTO FSC* C092599

CONCRETE JUNGLE

ENJOY THE CITY

GRES PORCELLANATO / PORCELAIN STONEWARE

BIA UGL - IMPASTO COLORATO/COLORED BODY - Decorazione/Decoration: INKJET - EFFETTO 3D/INKJET - 3D EFFECT Conforme/In compliance with: ISO 13006-G, EN 14411-G, ANSI A137.1

COLORI / COLOURS









ATELIER-25

FACTORY-56

STORE-18

PUB-49

SPESSORE / THICKNESS

10 mm - 11 mm (90x90 cm)


SUPERFICI E FINITURE / SURFACES AND FINISCHING

NATURAL RETTIFICATA E ROMPIFILO / RECTIFIED AND CHAMFER HONED LAPPATA, RETTIFICATA E ROMPIFILO / HONED, RECTIFIED AND CHAMFER

FUGA (DIMENSIONE DISTANZIATORE) - JOINT (SPACER SIZE)

≥2 mm

È compito del posatore controllare sempre il materiale prima della posa. Stendere a terra alcune piastrelle (circa 3 mq.) e verificarne accuratamente le specifiche tecniche ed estetiche d'insieme. The person in charge of installation must check all material before installing it. Place some tiles on the floor (approx. 3 m²) and check the overall technical and aesthetic characteristics with particular care.




90X90 cm 36"x36"

60X60 cm 24"x24"

30X60 cm 12"x24"

PEZZI SPECIALI / SPECIAL PIECES



GARANZIA / WARRANTY



20 ANNI RESIDENZIALE E PUBBLICO **20 YEARS** RESIDENTIAL AND PUBLIC



