
LAVAGRIGIA



STONE SELECT

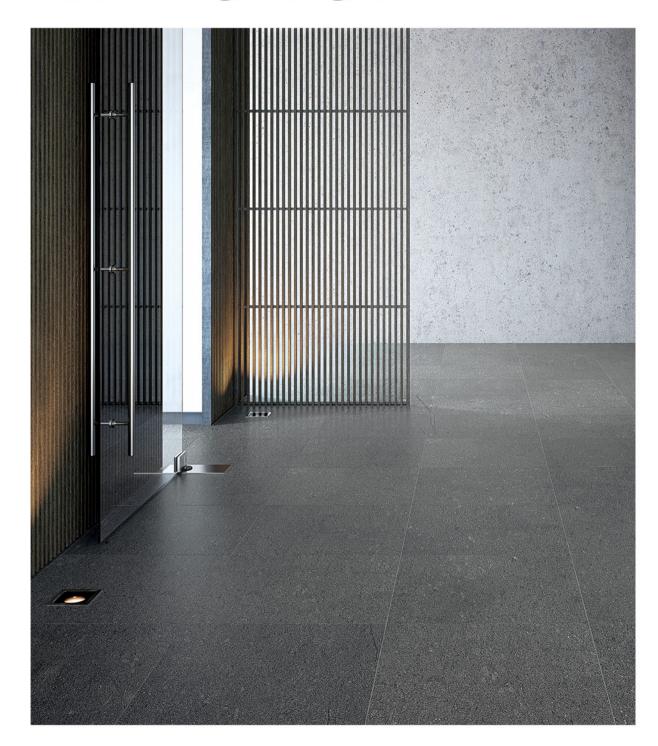

LAVAGRIGIA

LIGHT GREY

COLOR



60x120 cm 23.6x47.2"

ANTRACITE



60x120 cm 23.6x47.2"

60X60 CM

23.6x23.6"



60x120 cm 23.6x47.2"

SIZE

60X120 CM

23.6x47.2"

SPLINE GREY



FINISH





DECOR

SPLINE LIGHT GREY



SPLINE ANTRACITE





PRODUCT SPECIFICATIONS

	COLOE SIZE FINISH		60X60 CM 23.6x23.6"	60X120 CM 23.6x47.2"
	LIGHT GREY -	Natural	HD6F06 / DT1	HD12F06 / DT1
		Grip	HD6F06G / DT1	· ·
	GREY	Natural	HD6F07 / DT1	HD12F07 / DT1
GREI	Grip	HD6F07G / DT1	4	
ANTRACITE	Natural	HD6F08 / DT1	HD12F08 / DT1	
	Grip	HD6F08G / DT1	-	
	SPLINE LIGHT GREY	Natural	-	HD12F06T / DT2
	SPLINE GREY	Natural	-	HD12F07T / DT2
	SPLINE ANTRACITE	Natural	-	HD12F08T / DT2

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width			· · · · · pago	23.73600		
N14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
0X60 CM 23.6x23.6"	≤ 0.5	± 0.4	± 0.4	± 0.4	± 0.4	+0.8~-0.4	+0.8~-0.4	± 1.0	± 0.6
OX120 CM 23.6x47.2"	≤ 0.5	± 0.5	± 0.5	± 0.4	± 0.4	+0.8~-0.4	+0.8~-0.4	± 1.0	± 0.6

	<u>₩</u>	<u>*</u>		#1	*	igotimes	
	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance	
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3	
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 4	
60X120 CM 23.6x47.2"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 4	

PACKING LIST

	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT	Boxes Per EU PLT
60X60 CM 23.6x23.6"	2.78	4	32	64	+
60X120 CM 23.6x47.2"	1.39	2	45.3	48	



CHAMPION BUILDING MATERIALS CO., LTD.

No. 200-7, Zhugaocuo, Dapu Li 13 Lin, Zhunan Town, Miaoli Hsien, Taiwan, R.O.C.
+886 - 37- 583810 / export@mail.champion.com.tw / www.champion-tile.com













LIGHT GREY HD12F06 Natural 60x120 / 23,6x47,2"