

# Greystone.

600x1200 rectified

31

Greystone New York Antracite 60x60

# Greystone.



# Greystone.





# Greystone.

*new.*



**Grey Stone**  
Toronto 60x120 Rt.

DBC1263R



**Grey Stone\***  
Toronto 20x120  
DB012023



**Grey Stone**  
Vancouver 60x120 Rt.

DBC1264R



**Grey Stone\***  
Vancouver 20x120  
DB012024



**Grey Stone**  
Toronto 60x60  
Toronto Rt.

DBC66103  
DBC6613R



**Grey Stone 30x60**  
Toronto DBC36103  
Toronto Rt. DBC3613R



**Grey Stone**  
Vancouver 60x60  
Vancouver Rt.

DBC66104  
DB06614R



**Greystome 30x60**  
Vancouver DBC36104  
Vancouver Rt. DBC3614R



**Grey Stone 30x60** DBC3613A  
Muretto Toronto



**Grey Stone 30x60** DBC3614A  
Muretto Vancouver

**60x120 / 60x60 / 30x60 Conforme / According to / Conforme / Germäß / UNI EN 14411 - G BlaGres Fine Porcellanato Colorato in Massa / Colorbody fine Porcelain Stoneware / Grès Cérame fin coloré dans la masse / Durchgefärbtes Feinsteinzeug**



**\*20x120 Conforme / According to / Conforme / Germäß / UNI EN 14411 - G Bla - Gres Fine Porcellanato / Fine Porcelain Stoneware / Grès Cérame fin / Feinsteinzeug**





**Grey Stone**  
Chicago 60x120 Rt.  
DBC1262R



**Grey Stone\***  
Chicago 20x120  
DB012022




**Grey Stone**  
New York 60x120 Rt.  
DBC1261R



**Grey Stone\***  
New York 20x120  
DB012021

37

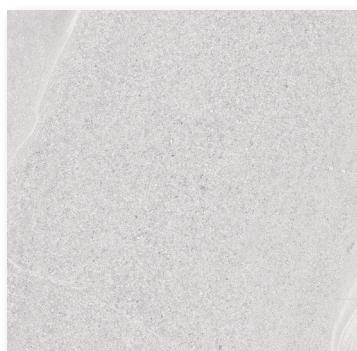


**Grey Stone**  
Chicago 60x60  
Chicago Rt.  
DBC66102  
DBC6612R



**Grey Stone** 30x60  
Chicago DBC36102  
Chicago Rt. DBC3612R



**Grey Stone**  
New York 60x60  
New York Rt.  
DBC66101  
DBC6611R

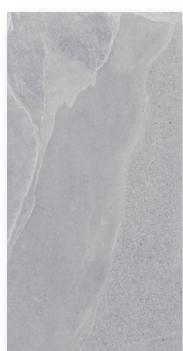

**Grey Stone** 30x60  
New York DBC36101  
New York Rt. DBC3611R



**Grey Stone** 30x60  
Muretto Chicago  
DBC3612A



**Grey Stone** 30x60  
Muretto New York  
DBC3611A

#### PEZZI SPECIALI.

SPECIAL TRIMS  
PIECES SPÉCIALES  
PIEZAS ESPECIALES  
SONDERSTÜCKE

Greystone Toronto

Greystone Vancouver

Greystone Chicago


Greystone New York




BATTISCOPPA  
8,5x60  
DBC3613B



BATTISCOPPA  
8,5x60 Rt.  
DBC613BR



GRADINO  
30x60  
DBC3613G



GRADINO  
30x60 Rt.  
DBC613GR



DBC3614B



DBC614BR



DBC3612G



DBC612GR



DBC3611B



DBC611BR




DBC3611G




DBC611GR

# GreyStone

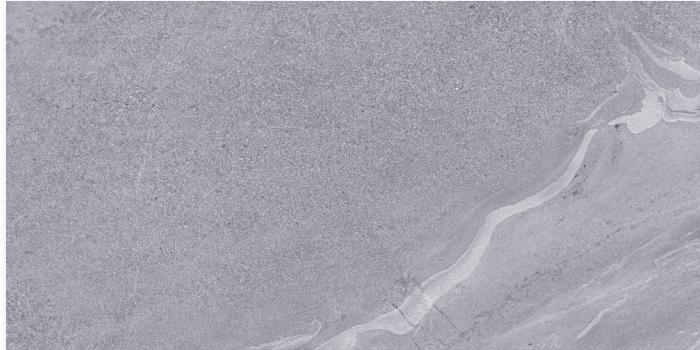

New York Antracite

DBC12601

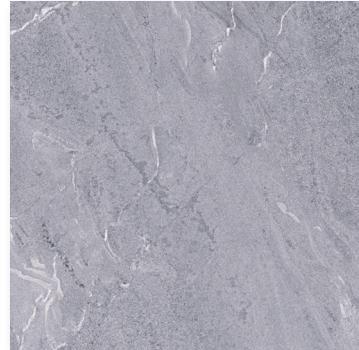

New York Antracite

DBC66101



New York Antracite  
DBC36101



Chicago Grigio

DBC12602



Chicago Grigio

DBC66102



Chicago Grigio  
DBC36102



Toronto Bianco

DBC12603



Toronto Bianco

DBC66103



Toronto Bianco  
DBC36103



Vancouver Tortora

DBC12604




Vancouver Tortora

DBC66104



Vancouver Tortora  
DBC36104

*Grey Stone New York Antracite*

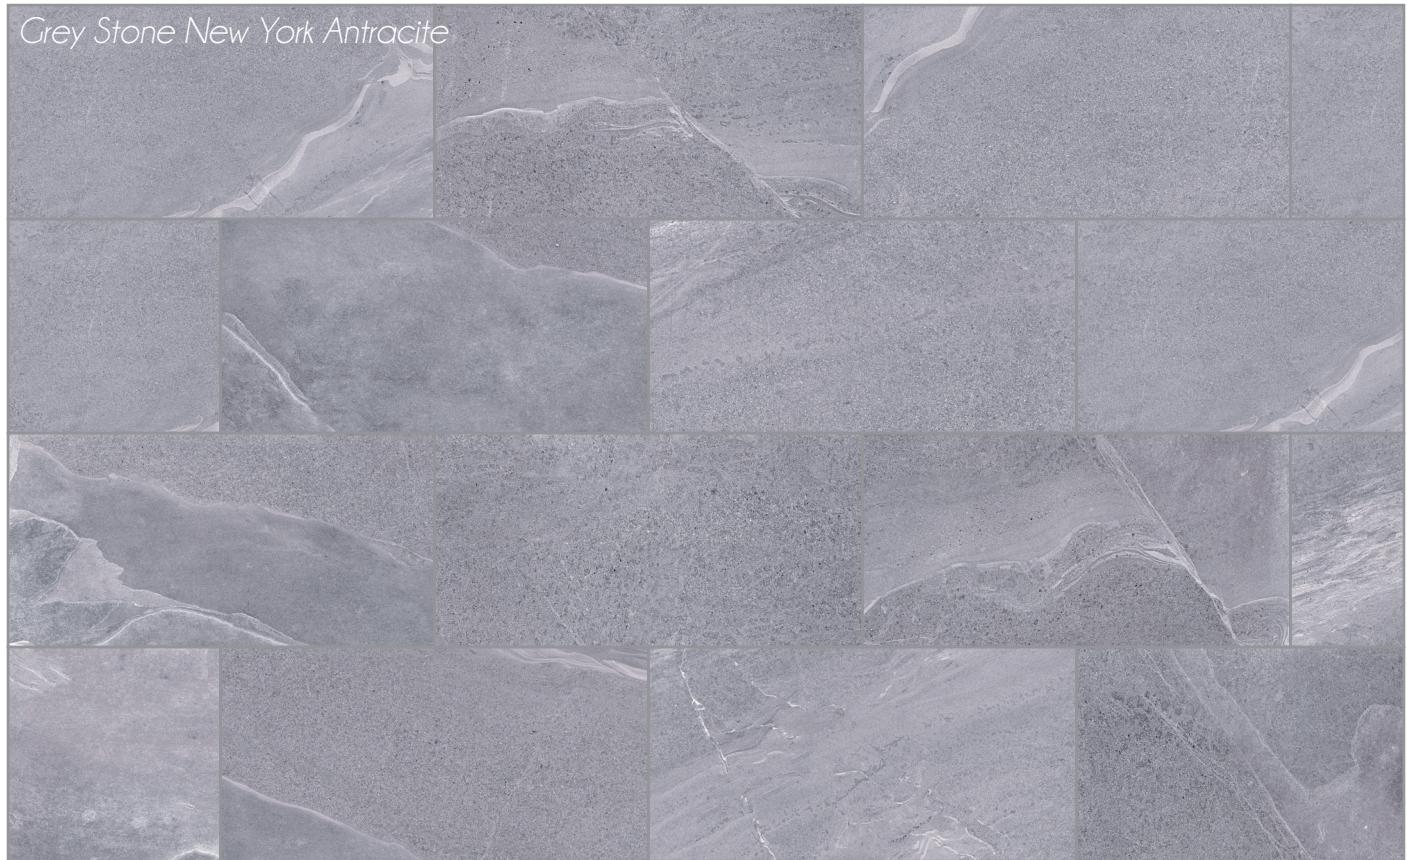

### **Grey Stone:**

Glazed stoneware with colored body - Glasiertes Feinsteinzeuge mit Farbiger Masse - Gres cerame emaille colore dans la masse


#### **FORMATO**

Size	Format	Formate
Cm		
60x120		
60x60		
30x60		



#### **SCATOLE**

Boxes Pz	Boites Mq	Kartons Kg
2	1,44	34,13
3	1,080	22,5
6	1,080	19,58



#### **PALETTE**

Pallets Sc	Palettes Mq	Paletten Kg
36	51,84	1229
40	43,20	900
48	55,98	940



# Technical Info

Current product regulations UNI.EN1441 - ISO 130006 and their testing methods.

Ceramic tiles are divided into groups according to their production method (extrusion or pressing) and their water absorption values.

- A. Extruded tiles (glazed and not glazed)
- B. Pressed tiles (glazed and not glazed)

The groups are broken down further according to their absorption values (porosity):

- Group B Ia
- Group B Ib
- Group B IIa
- Group B IIb
- Group B III

The regulations specify, for each product group, characteristics and deviations. All tiles of the Bell'Italia range are all manufactured by pressing and classified under groups B Ia, B IIa, B III.

Regulations for Testing Methods.

**REGULATIONS FOR TESTING METHODS:** These regulations define the methods for the determination of dimensions and surface quality, as well as physical and chemical properties.

123

Colorbody fine Porcelain Stoneware:

	SET VALUES	AVERAGE VALUES	REGULATION
UNI EN 14411 group Bla			
Dimensions	0,6%	0,2%	UNI EN ISO 10545-2
Rectangularity	0,5%	0,2%	UNI EN ISO 10545-2
Water absorption	≤ 0,5%	0,08%	UNI EN ISO 10545-3
Modulus of rupture and breaking strength	27N/mm²	43,2N/mm²	UNI EN ISO 10545-4
Resistance deep abrasion	≤ 175 mm³	as indicated	UNI EN ISO 10545-6
Resistance to thermal shock	No damage	No damage	UNI EN ISO 10545-9
Frost resistance	No damage	No damage	UNI EN ISO 10545-12
Chemical resistance	No damage	No damage	UNI EN ISO 10545-13
Slip resistance	>R9	>R9	DIN 51130
UNI EN 14411 group Bla		Appendice G Bla	

Fine Porcelain Stoneware:

	SET VALUES	AVERAGE VALUES	REGULATION
UNI EN 14411 group Bla			
Dimensions	0,6%	0,2%	UNI EN ISO 10545-2
Rectangularity	0,5%	0,2%	UNI EN ISO 10545-2
Water absorption	≤ 0,5%	0,08%	UNI EN ISO 10545-3
Modulus of rupture and breaking strength	27N/mm²	43,2N/mm²	UNI EN ISO 10545-4
Resistance abrasion / PEI	V / IV	as indicated	UNI EN ISO 10545-6
Resistance to thermal shock	No damage	No damage	UNI EN ISO 10545-9
Frost resistance	No damage	No damage	UNI EN ISO 10545-12
Chemical resistance	No damage	No damage	UNI EN ISO 10545-13
Slip resistance	>R9	>R9	DIN 51130
UNI EN 14411 group Bla		Appendice G Bla	

## Consigli di posa



La posa dei materiali della tipologia "Gres Porcellanato" richiede la posa con collante. La stuccatura del pavimento posato dovrà avvenire il giorno seguente la posa "a colla". Le fughe dovranno essere perfettamente pulite in tutto il loro spessore. La fuga può essere eseguita con stucchi cementizi o epoxidici preconfezionati. La stuccatura delle fughe deve essere effettuata con apposite spatole di gomma, facendo penetrare con particolare cura lo stucco in profondità. Eventuali danni generati da posa dei materiali effettuata direttamente con malta cementizia non sono da considerarsi responsabilità del produttore.

E' consigliabile usare per la stuccatura appositi sigillanti al fine di evitare assorbimenti indiretti delle piastrelle di ceramica posate in particolari zone d'uso. I sigillanti utilizzati per la stuccatura dei rivestimenti devono essere indicativamente "Bicomponenti" in grado di garantire le seguenti caratteristiche:

- Estrema facilità di pulizia rispetto ai normali sigillanti cementizi;
- Colorazioni stabili e uniformi su tutti i tipi di piastrelle;
- Elevate resistenze meccaniche;
- Bassissimo assorbimento d'acqua;
- Garanzia di assenza di crepe o cavilli dopo indurimento;
- Ottima resistenza chimica a acidi, basi e alle macchie.

Eventuali danni generati dalla posa delle piastrelle effettuata con materiali e metodi non a regola d'arte e con caratteristiche differenti da quelle indicate non sono da considerarsi responsabilità del produttore.

## Installing and Grouting



The materials included in the "Gres Porcellanato" series must be installed using light adhesive. The joints must be grouted in the day after the floor tiles have been installed with the correspondent adhesive. The joints must be then perfectly cleaned and levelled. The joints can be grouted with the prepacked cement based or epoxy based grouts.

The joints must be grouted using the special rubber grout floats, cleaning off the exceeding grout from the tile surface.

The Manufacturer cannot be responsible for possible damages as a consequence of wrong adhesive or grouting materials use.

We suggest the use of special sealing grouts in order to avoid indirect water absorption for tiles installed in some areas of the home (such as showers).

These sealants must be "Bi-components" and have to ensure following characteristics:

- easiness to be cleaned (compared to the usual cement based seals);
- uniform and stable coloration on all different kinds of tiles;
- high mechanical resistance;
- extremely low water absorption - better if water repellent;
- must guarantee absence of cracks or splinters after hardening;
- high chemical resistance to basic acids or stains.

The Manufacturer cannot be responsible for any kind of damage from installing and grouting the ceramic material with wrong and/or inappropriate adhesives or without the best working standards or with different characteristics from the above specified.

**Collection:**

Glazed stoneware with colored body - Glasiertes Feinsteinzeuge mit Farbiger Masse - Gres cerame emaille colore dans la masse


**FORMATO**

Size Format Formate  
Cm  
60x120 Rt



**SCATOLE**

Boxes	Boites	Kartons
Pz	Mq	Kg
2	1,440	34,1



**PALETTE**

Pallets	Palettes	Paletten
Sc	Mq	Kg
36	51,84	1228

**FORMATO**

Size Format Formate  
Cm  
60x60 Rt  
60x60



**SCATOLE**

Boxes	Boites	Kartons
Pz	Mq	Kg
3	1,080	22,5
3	1,080	22,5



**PALETTE**

Pallets	Palettes	Paletten
Sc	Mq	Kg
40	43,20	900
40	43,20	900


**FORMATO**

Size Format Formate  
Cm  
30x60 Rt  
30x60



**SCATOLE**

Boxes	Boites	Kartons
Pz	Mq	Kg
6	1,080	20,8
6	1,080	20,8



**PALETTE**

Pallets	Palettes	Paletten
Sc	Mq	Kg
48	51,84	1000
48	51,84	1000

128

**FORMATO**

Size Format Formate  
Cm  
45x45



**SCATOLE**

Boxes	Boites	Kartons
Pz	Mq	Kg
7	1,418	24,5



**PALETTE**

Pallets	Palettes	Paletten
Sc	Mq	Kg
52	73,74	1274


**FORMATO**

Size Format Formate  
Cm  
20x120



**SCATOLE**

Boxes	Boites	Kartons
Pz	Mq	Kg
4	0,96	18,50



**PALETTE**

Pallets	Palettes	Paletten
Sc	Mq	Kg
40	38,4	740

**FORMATO**

Size Format Formate  
Cm  
15x90



**SCATOLE**

Boxes	Boites	Kartons
Pz	Mq	Kg
9	1,215	22,9



**PALETTE**

Pallets	Palettes	Paletten
Sc	Mq	Kg
48	58,32	1100


**PEZZI SPECIALI**

Trims Pieces de finition Sondersütcke  
Cm  
8,5x60 Battiscopa Rt  
8,5x60 Battiscopa  
7x90 Battiscopa Rt  
7x90 Battiscopa  
7x120 Battiscopa Rt  
7x120 Battiscopa  
30x60 Mosaico muretto su rete  
30x60 Mosaico listellato su rete  
30x30 Mosaico su rete  
31x37 Mosaico Chevron (Chic)



**SCATOLE**

Boxes	Boites	Kartons
Pz	Mq	Kg
12	0,61	13,8
12	0,61	13,8
10	0,63	12,0
10	0,63	12,0
6	0,50	9,75
6	0,50	9,75
4	0,720	13,8
4	0,720	13,8
11	1,000	20,4
4	0,46	9,0



**PALETTE**

Pallets	Palettes	Paletten
Sc	Mq	Kg
70	42,70	966
70	42,70	966
66	41,58	792
66	41,58	792
40	20,00	390
40	20,00	390
50	36,0	690
50	36,0	690
50	50,0	1020
30	13,80	270



## Legenda

129



Pavimento matt  
Matt flooring  
Revêtement de sol mat  
Bodenbelag - matt



Pavimento semimatt  
Semimatt flooring  
Revêtement de sol mi-mat  
Bodenbelag - halbmatt



Pavimento lucido  
Glossy flooring  
Revêtement de sol brillant  
Bodenbelag - glänzend



Rivestimento matt  
Matt wall tiling  
Revêtement de mur mat  
Wandverkleidung - matt



Rivestimento semimatt  
Semimatt wall tiling  
Revêtement de mur mi-mat  
Wandverkleidung - halbmatt



Rivestimento lucido  
Glossy wall tiling  
Revêtement de mur brillant  
Wandverkleidung - glänzend



Resistenza all'abrasione profonda  
Resistance deep abrasion  
Résistance à l'abrasion profonde  
Tiefenabriebfestigkeit



Resistenza alla scivolamento  
Skid resistance  
Résistance à la glissance  
Rutschfestigkeit



Resistenza al gelo  
Frost proof  
Résistance au gel  
Frostbeständigkeit



Resistenza attacco chimico  
Chemical resistance  
Chemische Beständigkei  
Résistance attaque chimique



Resistenza all'abrasione  
Abrasion resistance  
Résistance à l'abrasion  
Abriebfestigkeit

Bell'Italia  
 tiles