

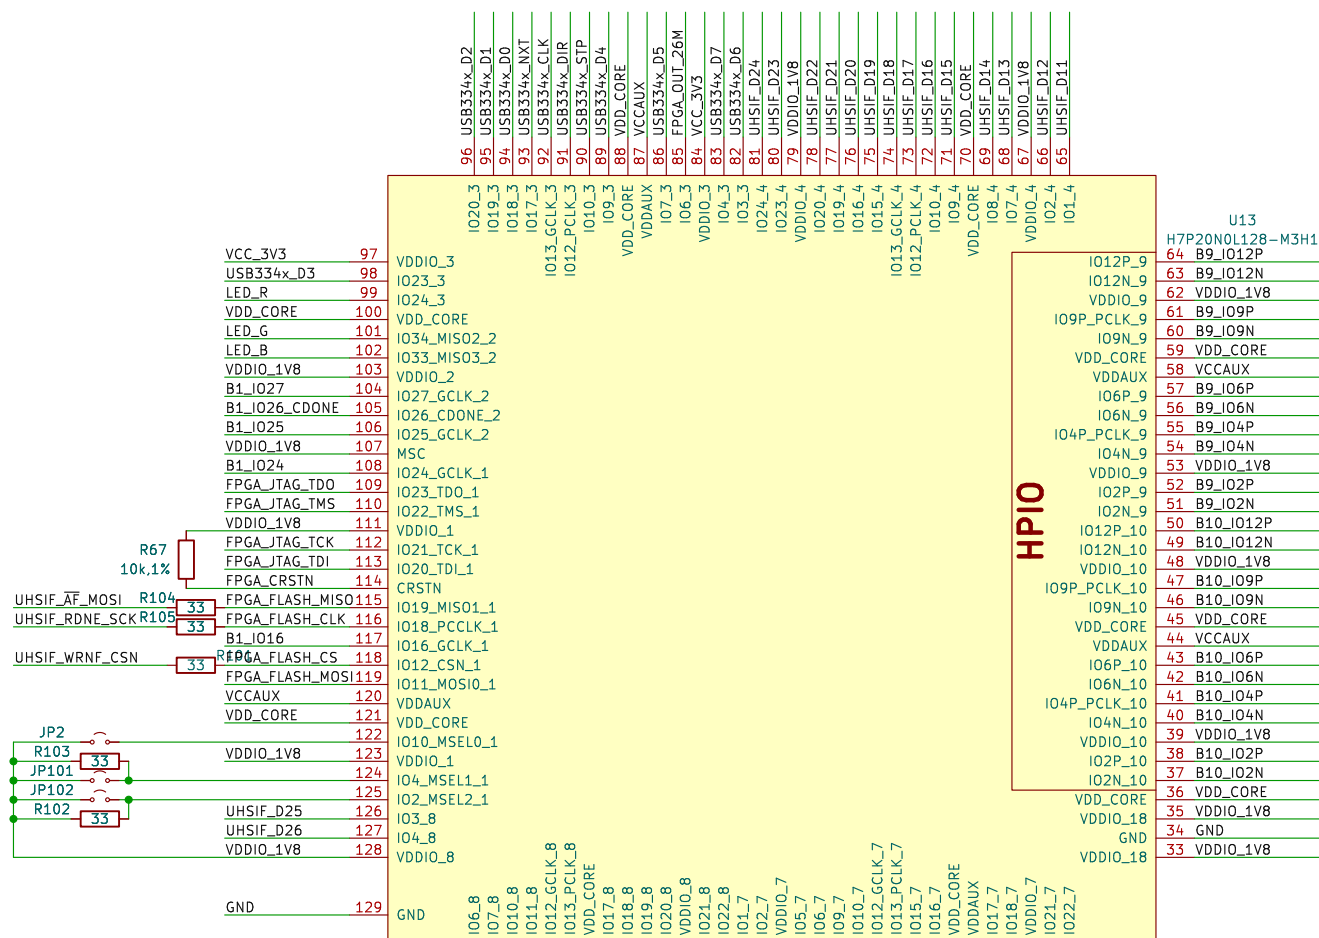

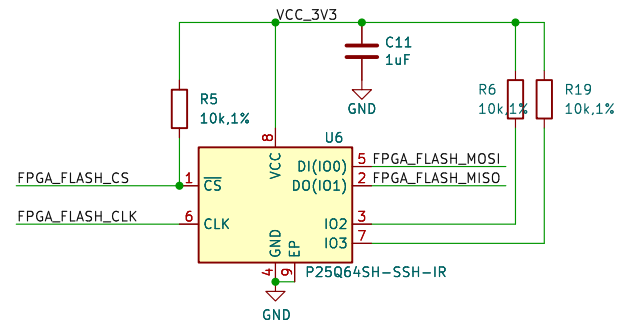




File: ch32h417weu6.kicad_sch

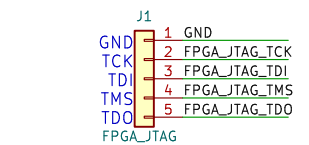



模式, MSEL[2:0]:110

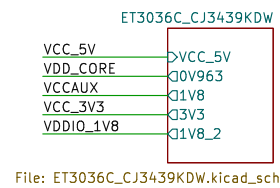


File: ET3036C_CJ3439KDW.kicad_sch

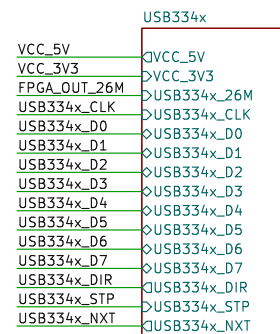

File: USB334x.kicad_sch

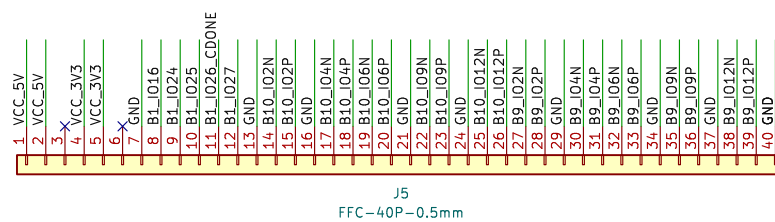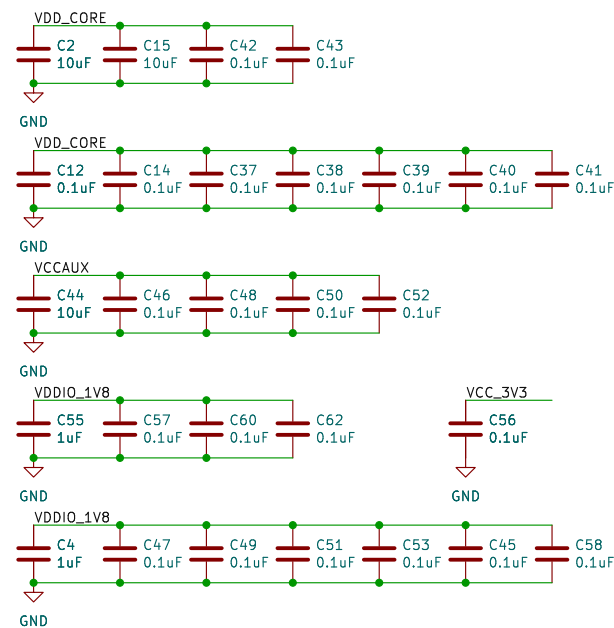

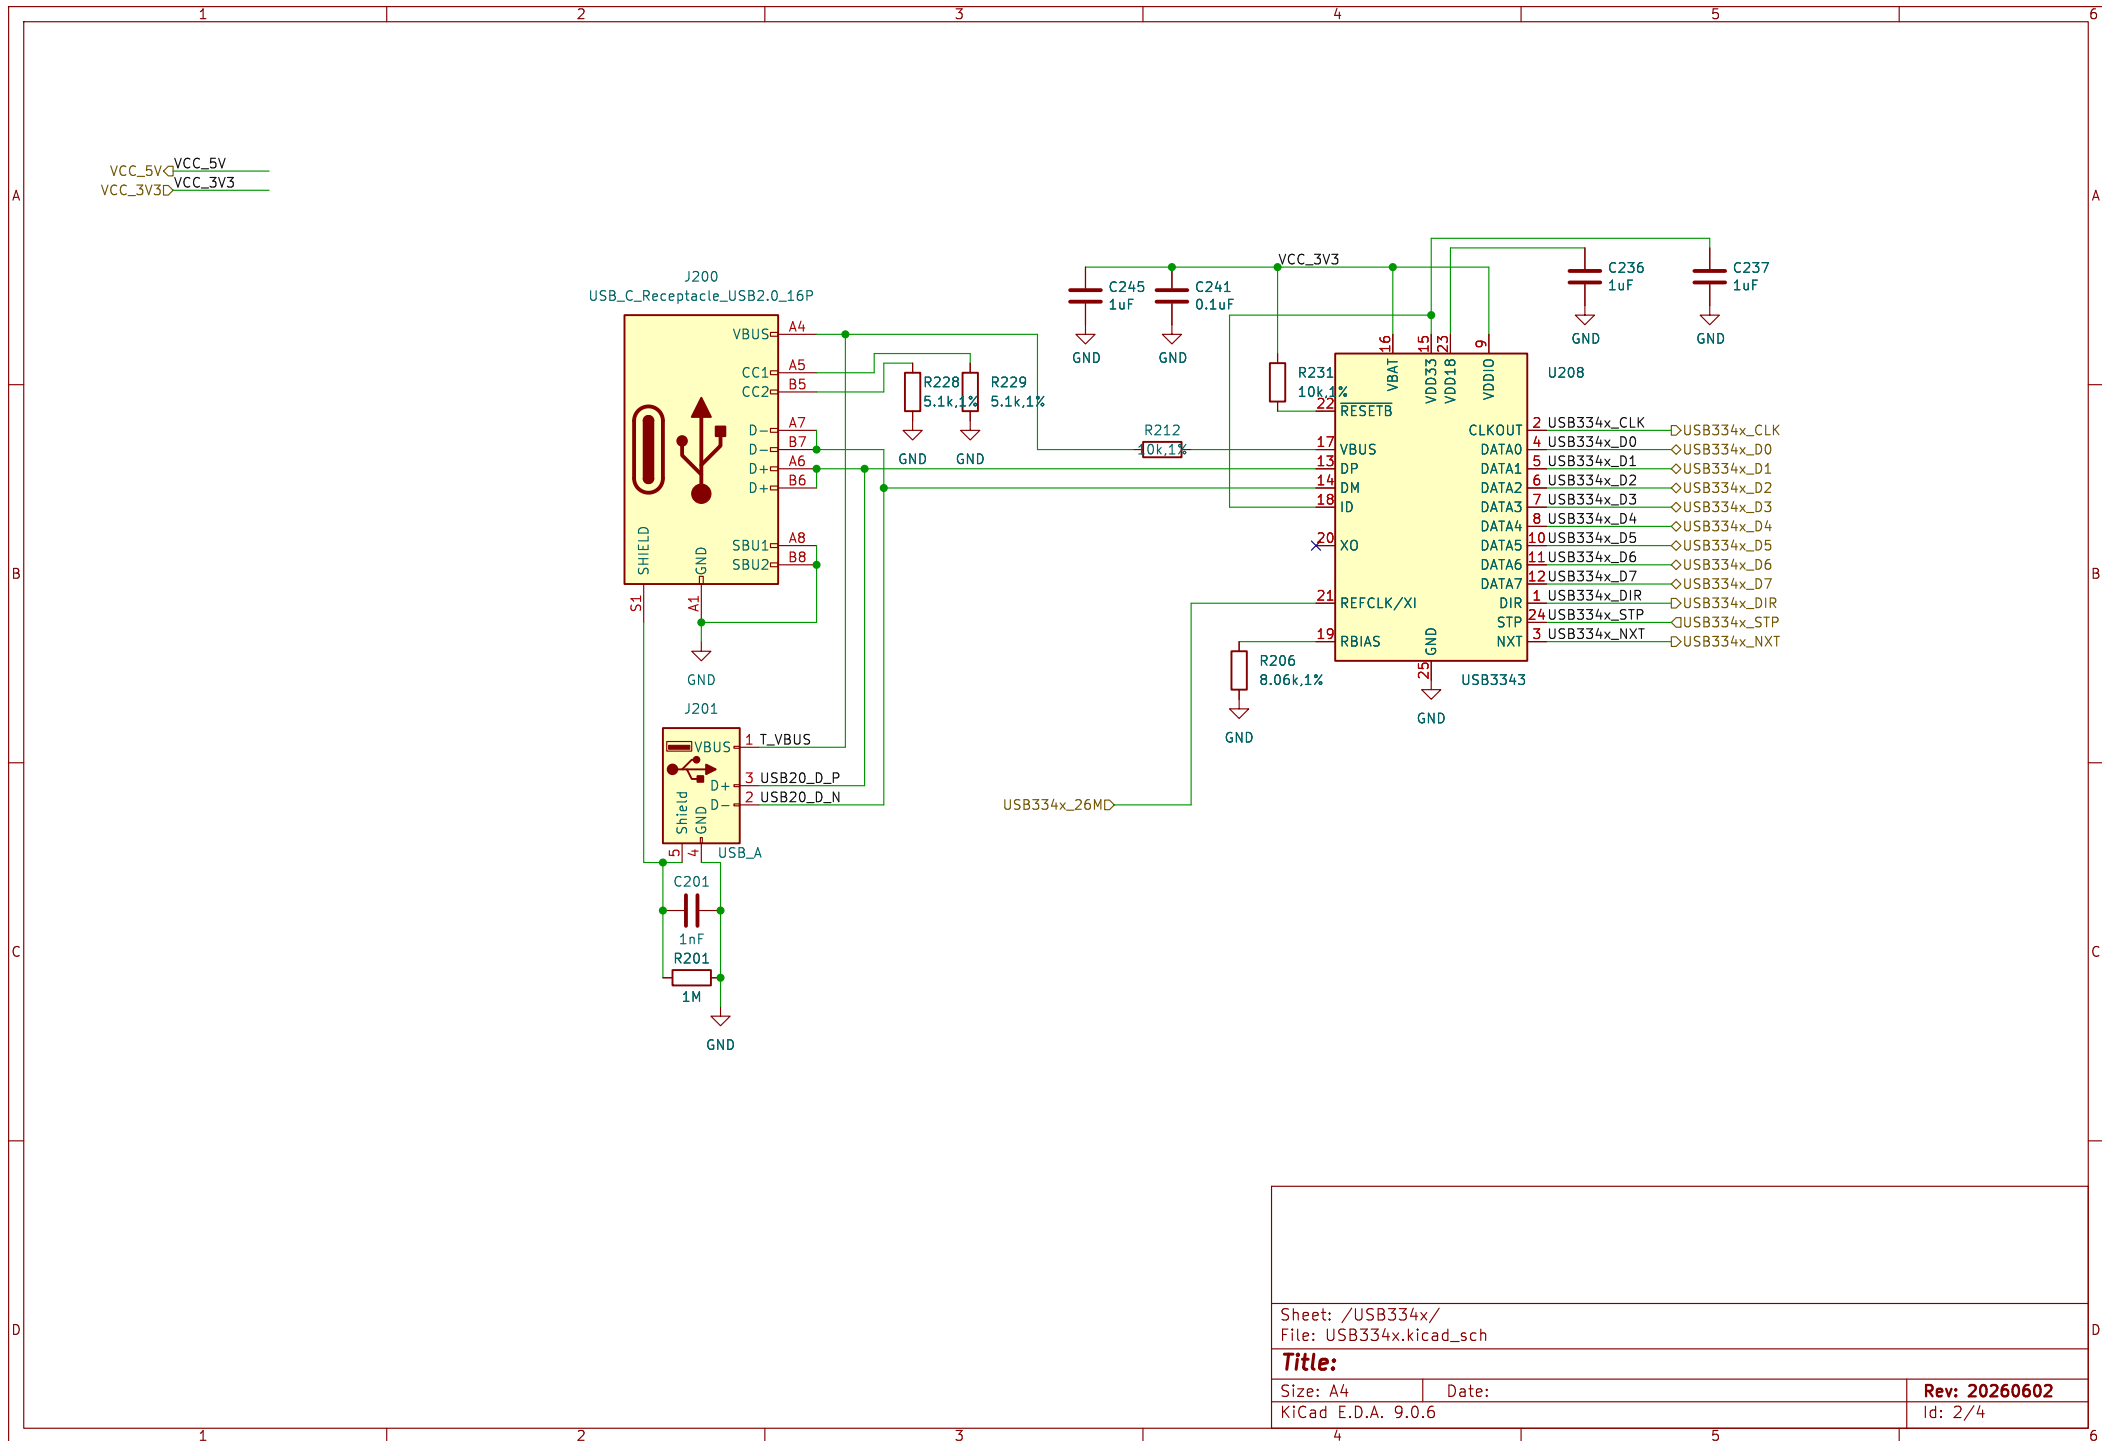

Sheet: /USB334x/
File: USB334x.kicad_sch


Title:

Size: A4 Date:

KiCad E.D.A. 9.0.6

Rev: 20260602

Id: 2/4

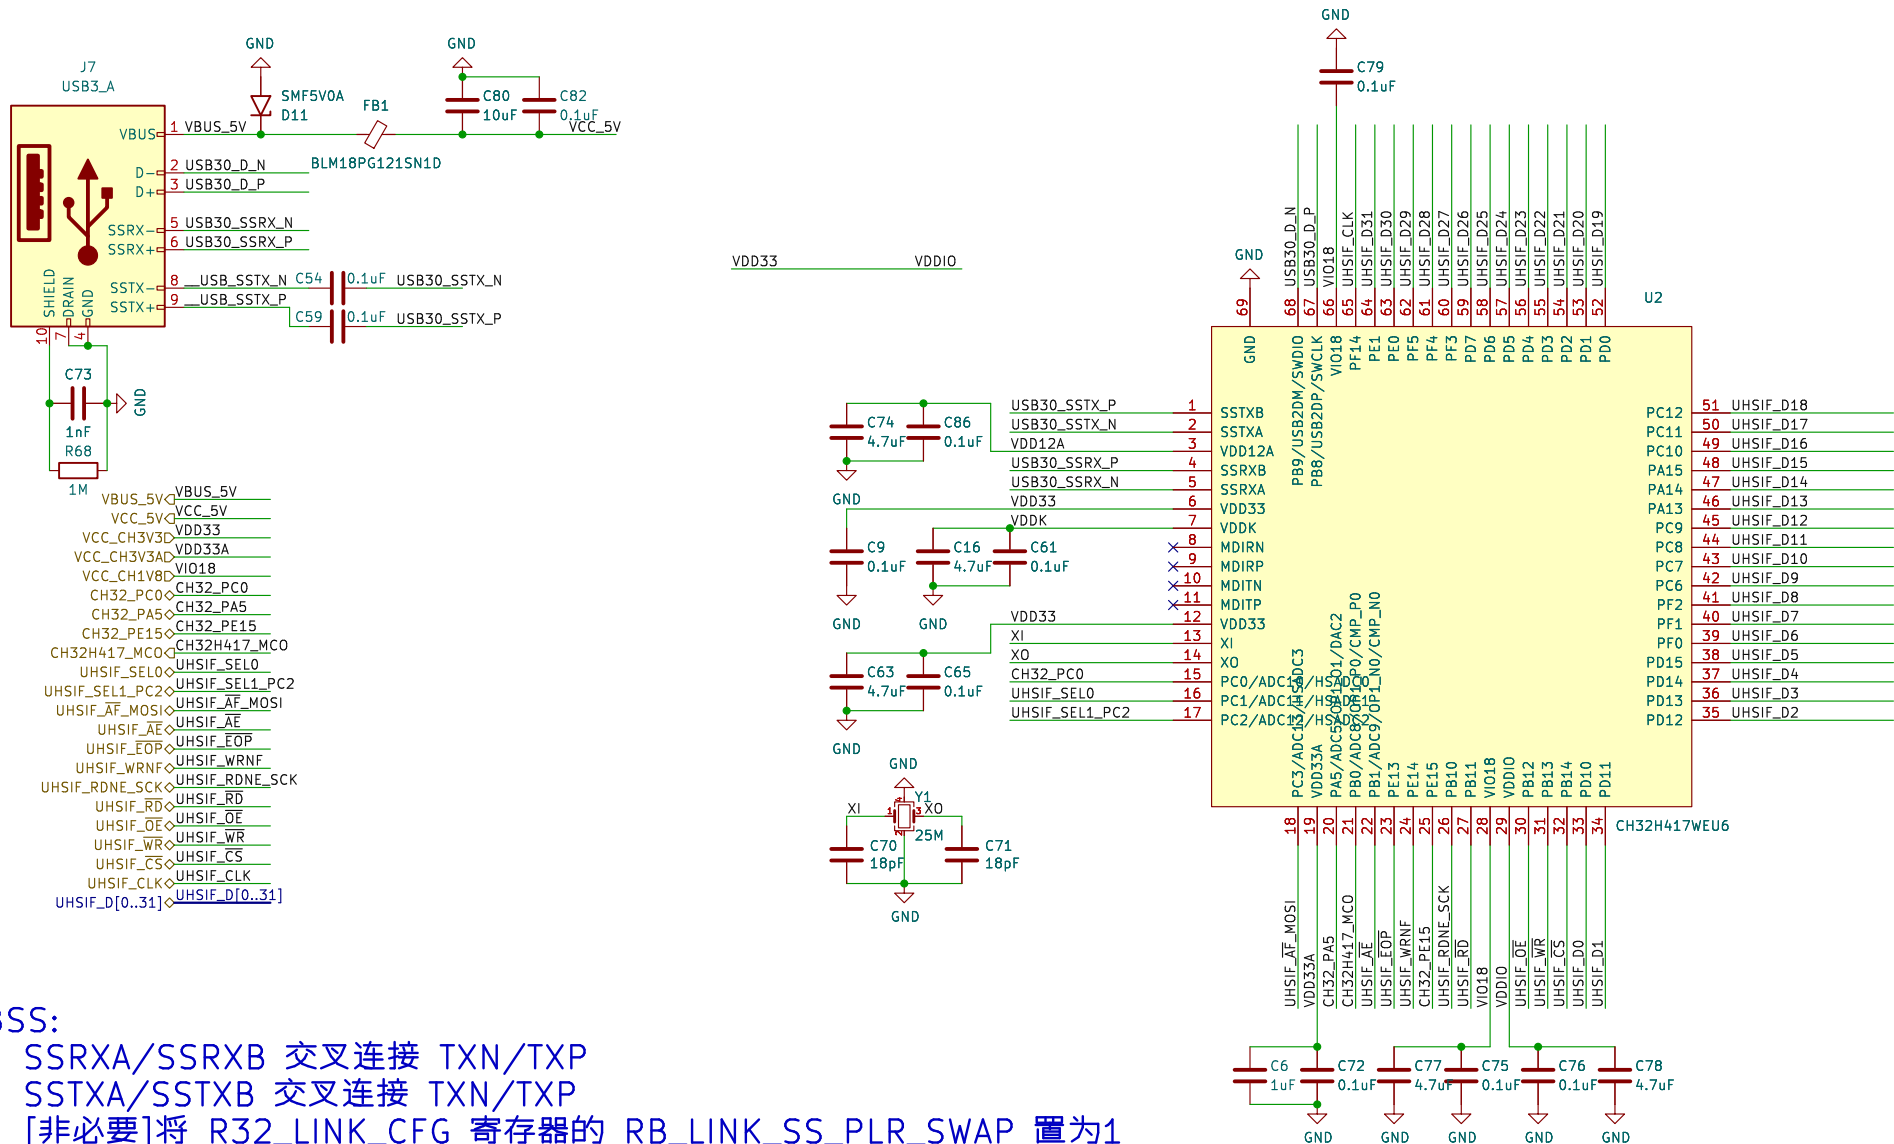

USBSS:

SSRXA/SSRXB 交叉连接 TXN/TXP

SSTXA/SSTXB 交叉连接 TXN/TXP

[非必要]将 R32_LINK_CFG 寄存器的 RB_LINK_SS_PLR_SWAP 置为1

[非必要]代码: USBSSD->LINK_CFG |= LINK_SS_PLR_SWAP;

UHSIF:

UHSIF_PORT_RM = 01

UHSIF_CLK_RM = 10

Sheet: /ch32h417weu6/

File: ch32h417weu6.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.6

Rev: 20260602

Id: 4/4

