

PACIFIC EUROPEAN WINDOW SILL & THRESHOLD COLLECTION

Window sills, window thresholds and door thresholds in granite and quartz, cut to size.

MATERIAL	FINISHES	THICKNESS
Granite and quartz	Polished, honed, leather	2 to 6 cm
EDGES	USE	PACKING
Bevelled, finished, cut to size	Interior and exterior; quartz interior only	Wooden crates

PRODUCTS


Sections not to a common scale. Every piece is finished, cut to size and edge-bevelled.



Bevelled edges

BACK FRONT

Window sill
Double bevelled available

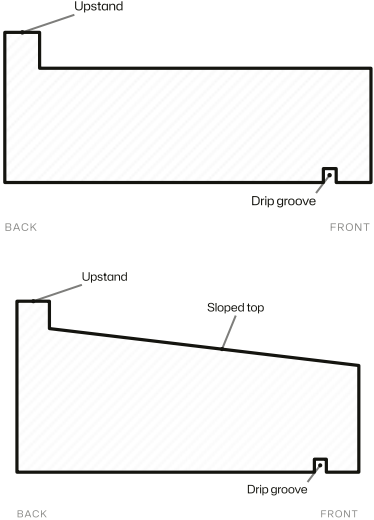

Upstand

Drip groove

BACK FRONT

Upstand

Sloped top

Drip groove

BACK FRONT


Window threshold
Straight or sloped top



Bevelled edges

BACK FRONT

Threshold

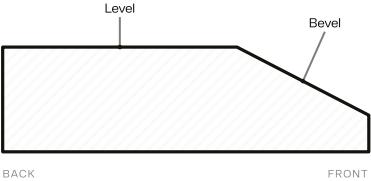


Level

Bevel

BACK FRONT

Single bevelled threshold

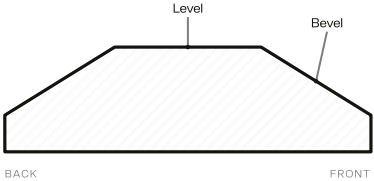


Level

Bevel

BACK FRONT

Double bevelled threshold

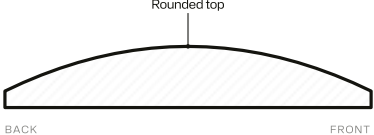

Rounded top

BACK FRONT

Wheelchair threshold

MATERIALS

Granite	Warangal Black, Steel Grey and G20, polished or leather, for interiors and exteriors.
Quartz	Super White, Arva White, Desert Silk and Cappuccino, polished, honed or leather, for interiors only.

FINISHES

Polished	A mirror gloss that deepens the colour.
Honed	Ground smooth to a flat, matt face. Quartz only.
Leather	Brushed to a soft, tactile texture with a low sheen.

MATERIAL PROPERTIES

QUARTZ

Thickness 2 cm · every colour in the quartz range

NO.	TEST PARAMETER	RESULT	TEST METHOD
A · MECHANICAL TESTING			
1	Water absorption, % by mass	0.04	ASTM C 97
2	Apparent density, g/cm ³	2.406	ASTM C 97
3	Mohs hardness	7	ASTM C 1895
4	Flexural strength, MPa: dry condition	66.2	ASTM C 880
5	Flexural strength, MPa: wet condition	78.5	ASTM C 880
6	Coefficient of linear thermal expansion, °C ⁻¹	4.8 × 10 ⁻⁶	ASTM C 372
7	Abrasion resistance, Ha	31.1	ASTM C 241
B · CHEMICAL TESTING			
8	Resistance to staining	Not affected	ASTM C 1378

GRANITE

Colour: Warangal Black

NO.	TEST PARAMETER	RESULT	TEST METHOD
A · MECHANICAL TESTING			
1	Water absorption, % by mass	0.06	EN 13755:2004
2	Apparent density, kg/m ³	3141.8	EN 1936:2006
3	Open porosity, %	0.94	EN 1936:2006
4	Flexural strength, MPa	34.2	EN 12372:2006
5	Compressive strength, MPa	195.8	EN 1926:2006
6	Abrasion resistance (groove length), mm	0.90	EN 14157:2016

Granite is a natural stone, so its properties vary between blocks and batches; the values shown are indicative, from a Warangal Black sample.

SIZES AND CRATES

WINDOW SILLS

LENGTH (CM)	WIDTH (CM)	THICKNESS (CM)	PIECES PER CRATE	WEIGHT PER CRATE (KG, APPROX.)	AREA PER CRATE (M², APPROX.)
88	20	2	35	406	6.16
88	25	2	35	493	7.70
101	20	2	35	450	7.07
101	25	2	35	566	8.84
101	30	2	35	679	10.61
126	20	2	35	541	8.82
126	25	2	35	706	11.03
126	30	2	35	847	13.23
151	20	2	35	656	10.57
151	30	2	35	1,015	15.86
176	20	2	35	788	12.32
176	25	2	35	986	15.40
220	15	2	35	739	11.55
220	20	2	35	986	15.40
220	25	2	35	938	19.25
220	30	3	1	63	0.66
220	40	2	1	56	0.88

THRESHOLDS

LENGTH (CM)	WIDTH (CM)	THICKNESS (CM)	PIECES PER CRATE	WEIGHT PER CRATE (KG, APPROX.)	AREA PER CRATE (M², APPROX.)
103	3	2	250	494	7.72
103	4	2	200	521	8.24
103	5	2	150	496	7.72
103	6	2	125	513	7.72
103	7	2	125	588	9.01
103	8	2	175	915	14.42
103	9	2	150	900	13.90
103	12	2	125	948	15.45
103	13	2	100	823	13.39
103	14	2	100	892	14.42
103	15	3	64	949	9.89
120	3	3	160	553	5.76
120	4	4	96	576	4.61
120	5	5	60	576	3.60
120	6	6	40	553	2.88

- Pieces per crate can be changed to suit the order.

– Area per crate = pieces per crate × length × width.

– Weight per crate is the approximate net stone weight and leaves out the crate timber; it varies with colour and material.

– Every piece is finished, cut to size and edge-bevelled.

PACKING	MINIMUM ORDER	HS CODES
Wooden crate packing. Cut to size and custom lengths available.	1 container load (approx. 21 to 26.5 MT net). Sizes can be mixed in the container.	Granite and natural stone: 68022390 Quartz: 68101990

CARE AND INSTALLATION	NATURAL VARIATION	CERTIFICATES
Seal polished granite before grouting. Quartz is for interior use only. Use a suitable adhesive or thin-set for the substrate and leave a grout joint suited to the installation.	Natural stone varies in colour, shade, veining and finish from piece to piece and batch to batch. Quartz may show slight variation between production batches. Colours shown are indicative, so please approve a physical sample before ordering. Technical values are typical and may vary by colour, material and batch.	Pacific's certificates on file: ISO 9001:2015, CE, NSF/ANSI 51, Kosher, EPD. Ask which apply to your order.