PROTOCODUS

# YouKnow

Circuit-Modelled Synth for Reason 14+
User Guide - 1.3.2f3




Direct subtractive synthesis, 100 original patches, polyphonic MIDI, monophonic Note/Gate CV, stereo chorus, and scalable rear-panel engine quality.

# Install and first sound

Install and update YouKnow through your Reason Studios account and the Reason Rack Extension browser. After installation, find **YouKnow** under Instruments in the device palette.

1. Create YouKnow and play MIDI notes. The Init patch loads by default, and Reason creates a sequencer track and routes stereo audio when a suitable destination is available.
2. Use the patch display and browse controls to explore the 100 patches. Categories include Bass, Leads, Keys, Brass, Pads, Strings, and Effects.
3. Shape the sound on the front. Flip the rack to adjust processing quality, Unit Character, Aging, or CV connections.
4. Save sounds with Reason's normal patch command. Unit Character is saved with the patch; Aging and processing quality are saved with the song.

Init and **Reset Device** use a plain 8′ saw with the filter fully open, resonance and modulation off, a gated VCA with calibrated Level, and chorus off. To shape notes with Attack, Decay, Sustain and Release, switch the VCA to **ENV**.

# Front panel


**LFO** sets modulation rate and delayed onset. **DCO** selects octave range, PWM source and depth, and oscillator modulation. **MIXER** contains the pulse/saw switches and sub/noise levels. **HPF** provides four positions; the lowest, labelled 0, retains the bass-boost setting.

**VCF** controls cutoff (FREQ), resonance (RES), envelope polarity (POL, +/–) and amount (ENV), LFO amount (LFO), and keyboard tracking (KYBD). At high resonance the filter can self-oscillate. **VCA** chooses envelope or gate behavior and sets the amplifier level. **ENV** supplies attack (A), decay (D), sustain (S), and release (R). **CHORUS** offers Off, I, II, and a dedicated narrow I+II combination; NOISE sets its hiss level. As on the original, an engaged chorus hisses whether or not a note is playing, so a cabled YouKnow keeps processing its chorus while idle. With Chorus Off, NOISE at zero or no output cable, it goes quiet about 0.2 seconds after its last note and stops processing until the next one.

**Performance** contains the pitch and modulation wheels, Volume, and performance modulation depths. Volume is the master output control. VCA Level balances the stored sound. In its native range it changes amplifier drive before the chorus; its software extension is described under Patches. **Keyboard** contains glide, key mode, transpose, master tune, velocity response (VEL), and the 1-16 voice limit. At VOICES=1, the newest held note takes priority in every key mode. Releasing it returns to the most recently pressed note that is still held. Glide follows these pitch changes; releasing an older key does not interrupt the current note. Clicking the already-selected Poly 1, Poly 2, or Unison button repeats the held-key reassignment gesture. With multiple voices, Poly 1 and Poly 2 glide from each voice’s own pitch history. Poly 2 reuses available voices sooner, making the glide more apparent. Unison also preserves each voice’s glide history; the original six voices start with middle-C pitch memories. A newly pressed key takes over the stack. Releasing any held key retriggers the highest remaining held key. Whenever Unison is selected, final output is scaled to 80% (-1.94 dB), with a short smooth transition when changing modes. This is a product convenience, not original hardware behavior.

The seven-cell status strip reports processing quality, Character, and Aging. Their editable controls are on the rear.

# Rear panel and engine quality

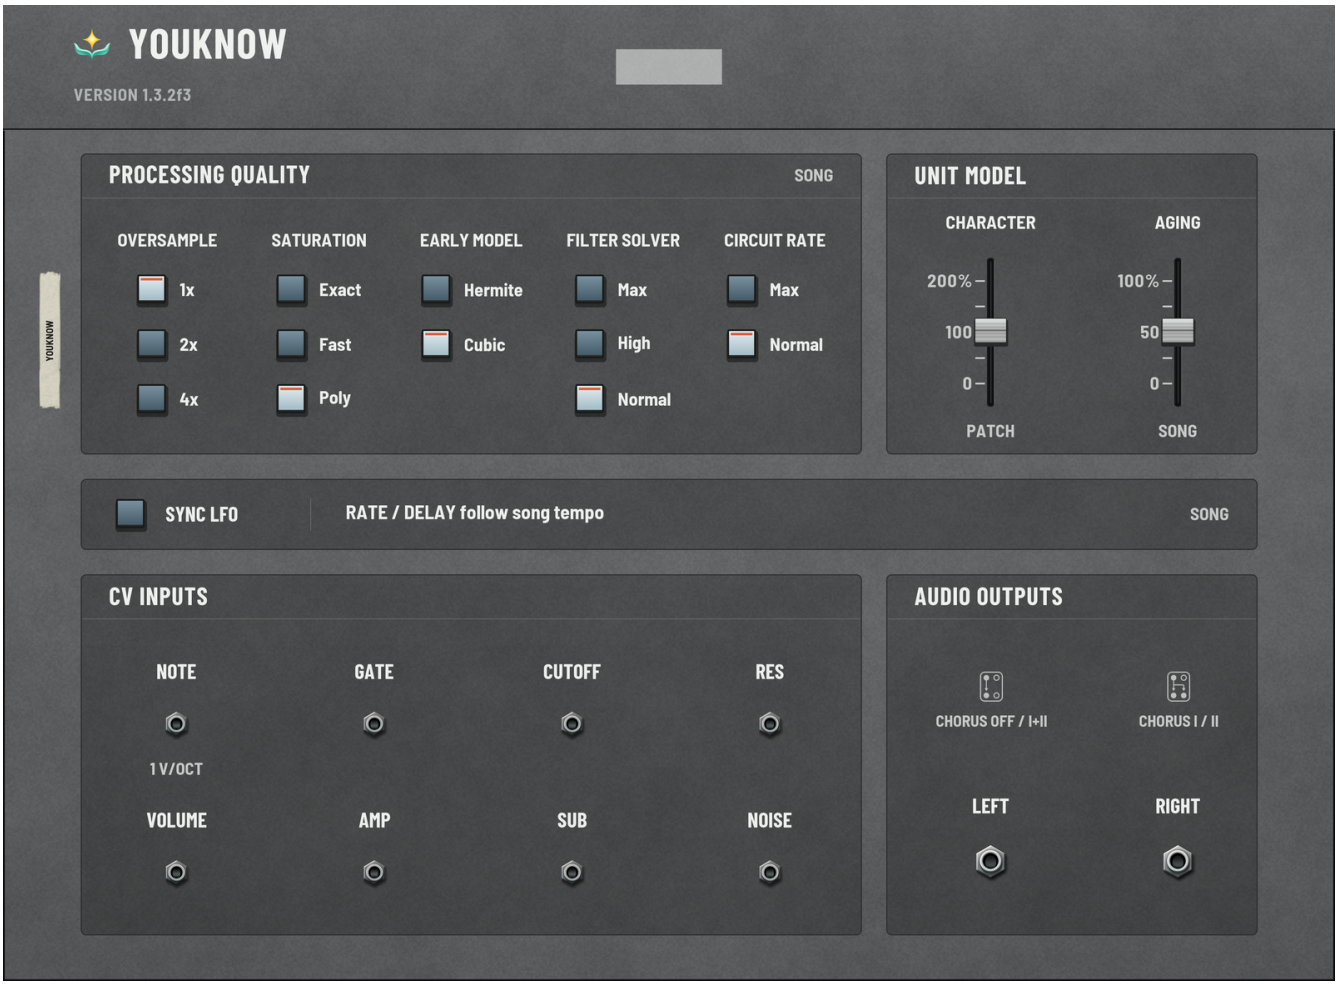


The rear groups five Processing Quality selectors, two Unit Model controls, a Sync LFO switch, eight CV inputs, and stereo audio outputs. Settings occupy the upper half; connections sit below them so downward cable runs leave the settings clear.

The two routing symbols above the audio jacks are Reason's standard icons. YouKnow's voice bus is mono: with Chorus Off or I+II both jacks carry the same signal, and with Chorus I or II the chorus spreads it into stereo. When only one jack is cabled, as when Reason auto-routes YouKnow to a mono channel, that jack carries the mix of both channels, as the original instrument's L/MONO jack does; with both jacks cabled each carries its own channel.

**Sync LFO** makes LFO RATE and DELAY follow the song tempo. It defaults to Off and is saved with the song, so browsing patches leaves it unchanged. With Sync LFO On, the front RATE slider selects **4/1, 2/1, 1/1, 1/2, 1/4, 1/8, 1/16, 1/32, or 1/64**, from slow to fast; the front readouts show Free/Sync and the selected note lengths. A whole note is four quarter-note beats, independent of the time signature. DELAY (labelled DLY on the front panel) selects **Off, 1/64, 1/32, 1/16, 1/8, 1/4, 1/2, 1/1, 2/1, or 4/1**, from short to long. The selected length is the wait before DCO/VCF modulation, followed by a fade-in of the same length. For example, 1/4 waits one beat and fades in over the next beat; Off applies the modulation immediately. The original note/retrigger behavior is retained, and PWM has no delayed onset. With Sync LFO Off, both blue RATE and DLY readouts stay blank. With Sync LFO On, they show the selected note divisions. The fader tooltips identify the controls and explain the synced readouts. Tempo and rate changes preserve the current LFO phase; starting or seeking the transport does not retrigger it. This synchronizes DCO/VCF/PWM modulation; chorus timing is separate.

**PWM** retains the stored positions used by existing Rack patches and automation. Positions above about 82.7% now hold the physical panel maximum, so high manual settings and full LFO depth cannot drive the pulse comparator into its former out-of-range mute. Settings below that limit keep their previous pulse widths.

**Unit Character** varies circuit tolerances across a 0-200% range. It is stored with each patch.

**Aging** models service drift and noise changes across a 0-100% range. New devices start at 50%; set it to 0% for the freshly serviced state. Aging is stored with the song, so patch browsing leaves it unchanged and existing songs recall their saved value.

- **Oversample (Quality): 1x, 2x, 4x.** The default is 1x. Higher settings request more internal processing and increase CPU use; an already-high host sample rate can limit the applied factor. Changes, including automation, wait for voices and output tails to become quiet, then use a short fade.
- **Saturation (VCF Tanh): Exact, Fast, Poly.** Poly is the efficient default. Fast and Exact provide alternative filter calculations at higher CPU cost.
- **Early Model (Fast Early): Hermite, Cubic.** Cubic is the default; Hermite provides an alternative interpolation for the fast filter path.
- **Filter Solver (VCF Solver): Max, High, Normal.** Normal is the efficient default. High and Max spend more processing on the filter.
- **Circuit Rate: Max, Normal.** Normal is the efficient default: the filter, voice amplifier and chorus run their high-rate stages at half the Max rate, and voices that are not sounding rest those stages. Max keeps the full rate, which removes the highest distortion products instead of folding them back; on bright open chords Normal measures up to 0.33 dB more level above 14 kHz. Max costs about 1.4 times Normal's processing with six voices sounding. At 4x, or at 2x when Reason runs at 88.2 or 96 kHz, those stages already run at the internal rate, so both settings sound and cost the same. Changes wait for voices and tails to become quiet, like Oversample.

The shared SONG heading applies to all five quality settings; they survive patch changes. Start with 1x, Poly, Cubic, Normal and Normal for a busy rack. The combination of 16 voices and 4x is the heaviest configuration. An idle instance with its chorus hiss running costs about a fifth of its processing with one note sounding; turn Chorus NOISE to zero on instances that should rest between notes.

# Automation and Remote

All 43 sound, performance, and quality controls support Reason sequencer automation and Remote mapping. This includes Chorus Hiss, Unit Character, Aging, Sync LFO, and all five rear quality selectors. Existing automation lanes retain their assignments. The pitch and modulation wheels and sustain use Reason's standard performance automation.

Rear controls and their readouts show Reason's automation indication; the front status strip remains read-only. Automating Quality or Circuit Rate follows the same quiet-tail transition policy as changing it manually.

The held-key reassignment press is a transient gesture available to Remote. It has no separate sequencer lane. Preset balance is stored on visible VCA Level and can be edited or automated directly.

# CV, tuning, and timing

The rear CV sockets form two rows: NOTE, GATE, CUTOFF, RES above VOLUME, AMP, SUB, NOISE. The Note/Gate pair plays a monophonic CV part; MIDI remains polyphonic up to the selected voice limit.

- **NOTE and GATE:** Note sets pitch; Gate triggers and releases the note. Changing Note while Gate remains high retargets the held note legato.
- **CUTOFF and RES:** CV adds to the corresponding normalized panel value. The result is limited to the control's 0-100% range. For example, a 50% cutoff setting with +0.25 CV becomes 75%; -0.25 CV makes it 25%.
- **VOLUME, AMP, SUB, and NOISE:** CV scales the normalized travel of Volume, VCA Level, Sub and Noise respectively. CV is limited to 0-1: 1 leaves the setting unchanged, 0.5 halves its travel and 0 selects its lowest

position. The resulting level follows the control's modeled or extended response; halving travel does not necessarily halve amplitude. VCA's minimum is attenuation, not mute.

Disconnected modulation inputs leave their panel values unchanged. Panel edits and automation remain the base values that CV modulates. CV responds to Reason's control updates; these inputs are not an audio-rate modulation path.

YouKnow follows Reason's master tuning preference alongside its panel Tune setting. It reports 120 samples of latency below 176.4 kHz and 41 samples at higher sample rates, consistently across every Quality setting at that rate.

# Patches

The supplied bank contains 99 Protocodus sounds and a plain Init patch. Every factory preset, including Init, is calibrated to -7 dBFS sample peak for G3 as named in Reason (MIDI note 67), played at velocity 100. Measurement uses 48 kHz, master Volume 80%, the shipped processing defaults, Aging 50%, a 12-second held note and 18-second release. The tolerance is 0.1 dB because the hardware VCA has discrete steps. This reference-note peak target preserves each sound's envelope and dynamics; other notes, velocities and chords produce their normal range of levels.

Each preset's calibrated balance is stored on visible VCA Level. Its range extends from -24 to +24 dB. The original hardware gain path is retained from about -16 to +5 dB; beyond those endpoints, the extra level scales the final output, including noise. Both parts follow the same visible control, so you can change any preset's level directly. Master Volume remains available for overall adjustment. There are no hidden preset gain factors and no limiter. Older songs may need level readjustment because VCA Level's range changes and legacy hidden trims are inactive. Reason's categories and tags help find sounds by type and character.

Use Reason's patch browser and patch files to manage sounds. MIDI Program Change and SysEx file import/export are not supported.

# Troubleshooting

- **Notes arrive but there is no sound:** load Init, verify Volume and VCA Level, check any connected level CV sources, and confirm the audio outputs are connected.
- **High CPU:** select 1x, Poly, Cubic, and Normal on the rear. Reduce Voices for dense arrangements.
- **A Quality change seems delayed:** release all notes and let the output tail settle so the requested change can take effect.
- **No CV response:** check the intended socket and the source range. A pitched CV sequence needs both Note and Gate connections; level CV scales the current panel setting, so it cannot raise a control already set to zero.
- **A problem persists:** visit protocodus.cz/product/youknow or email protocodus+support@proton.me. Include the YouKnow and Reason versions, operating system, computer model, audio sample rate, patch name, and steps to reproduce the problem.

# Privacy and legal

YouKnow performs audio processing offline and contains no telemetry or network client. The PDF manual includes the MIT notice for Protocodus-authored source and artwork, the privacy notice, and third-party provenance. Their maintained source copies are `LICENSE`, `PRIVACY.md`, and `THIRD_PARTY_NOTICES.md`. Reason Studios' applicable customer terms govern Shop delivery; the MIT notice does not relicense Reason SDK material.

YouKnow is an independent Protocodus product. It is not affiliated with, endorsed by, sponsored by, or licensed by Roland Corporation. Reason and Rack Extension identify the compatible Reason Studios platform.

# Protocodus source-component MIT license

This notice applies only to Protocodus-authored source and artwork. It does not relicense Reason SDK material. Shop delivery is governed by Reason Studios' applicable customer terms.

MIT License

Copyright (c) 2026 Protocodus

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

# Privacy notice

Last updated: 5 September 2026

YouKnow is an offline audio product from Protocodus. The Rack Extension has no advertising, telemetry, analytics, automatic update checks, network requests, or built-in crash-report upload. It does not intentionally send audio, notes, patches, song data, device identifiers, or usage data to Protocodus.

Audio and control data are processed inside Reason on the user's computer. Reason may store YouKnow settings in songs and patches. Reason Studios handles accounts, licensing, purchases, downloads, host diagnostics, and any related network activity under its own settings and privacy terms.

If a user contacts support, Protocodus receives the information they choose to send, such as an email address, diagnostic details, or attachments. It is used to answer the request, investigate the issue, meet legal obligations, and protect the service. Users should not send confidential songs, credentials, or recordings unless they are necessary and safe to share.

Privacy questions and requests can be sent to protocodus+support@proton.me. Product and company information is available at the YouKnow support page. An updated notice will accompany a release if YouKnow's data practices change.

# Third-party notices and provenance

Protocodus' original YouKnow source and panel artwork are covered by the MIT license. The Rack Extension is built with the separately licensed Reason Rack Extension SDK and is intended for distribution through the authorized Reason Studios channel. Reason SDK material is not relicensed under YouKnow's MIT license.

SDK standard artwork supplies the pitch/mod wheels, audio/CV sockets, device-name tape, placeholder, patch-browser group, and folded patch-name field. These remain under SDK terms, not YouKnow's MIT license. Panel labels, section titles and the YouKnow wordmark are rasterized from Barlow Condensed Bold and Barlow Semi Condensed Bold 1.408, Copyright 2017 The Barlow Project Authors (https://github.com/jpt/barlow), committed in `Design/Fonts/` under the SIL Open Font License 1.1 (`ThirdParty/OFL-Barlow.txt`). Font files are not

shipped. Reason supplies the native patch/status text. Exact inputs, hashes, mappings, and adapted sample scaffolding are recorded in `Docs/release/asset-provenance.md`.

## Generated faceplate material

Front-panel artwork incorporates a charcoal-plastic texture generated for YouKnow with OpenAI built-in image generation in new-image mode. The Rack renderer filters and composites it into panel and browser images; the loose texture is not shipped in the U45. `Docs/release/asset-provenance.md` records the pinned source image, SHA-256, upstream notice, and generation prompt.

## Modelling references

YouKnow is an independent implementation informed by published virtual-analog research. It does not copy or include the reference implementations associated with these publications.

- Vadim Zavalishin, *The Art of VA Filter Design* - topology-preserving transforms and ladder-filter analysis.
- Tim Stilson and Julius O. Smith, *Analyzing the Moog VCF with Considerations for Digital Implementation* (1996) - ladder root-locus analysis.
- Antti Huovilainen, *Non-linear digital implementation of the Moog ladder filter* (DAFx-04), and Stefano D'Angelo and Vesa Valimaki, *Generalized Moog Ladder Filter: Part II* - nonlinear delay-free-loop methods.
- Vesa Valimaki, Jussi Pekonen and Juhan Nam, *Perceptually informed synthesis of bandlimited classical waveforms using integrated polynomial interpolation* (JASA, 2012) - bandlimited waveform synthesis.
- Martin Holters and Julian Parker, *A Combined Model for a Bucket Brigade Device and its Input and Output Filters* (DAFx-18) - bucket-brigade delay modelling.

## Patches

The shipped bank contains 100 patch names and parameter states created for YouKnow by Protocodus. No third-party factory tone-memory records or archival factory labels are included. The source-history and sound-state comparison behind this inventory are recorded in the patch provenance audit.

No firmware, ROM image, sample, impulse response, captured audio, or separately sold sound-bank data is included.

## Trademarks

YouKnow is an independent Protocodus product. It is not affiliated with, endorsed by, sponsored by, or licensed by Roland Corporation. Roland and Juno are Roland Corporation trademarks; development documentation uses them only to identify the studied historical architecture.

Reason, Reason Studios, and Rack Extension are Reason Studios AB trademarks. They identify compatibility and do not imply endorsement beyond the Rack Extension program.