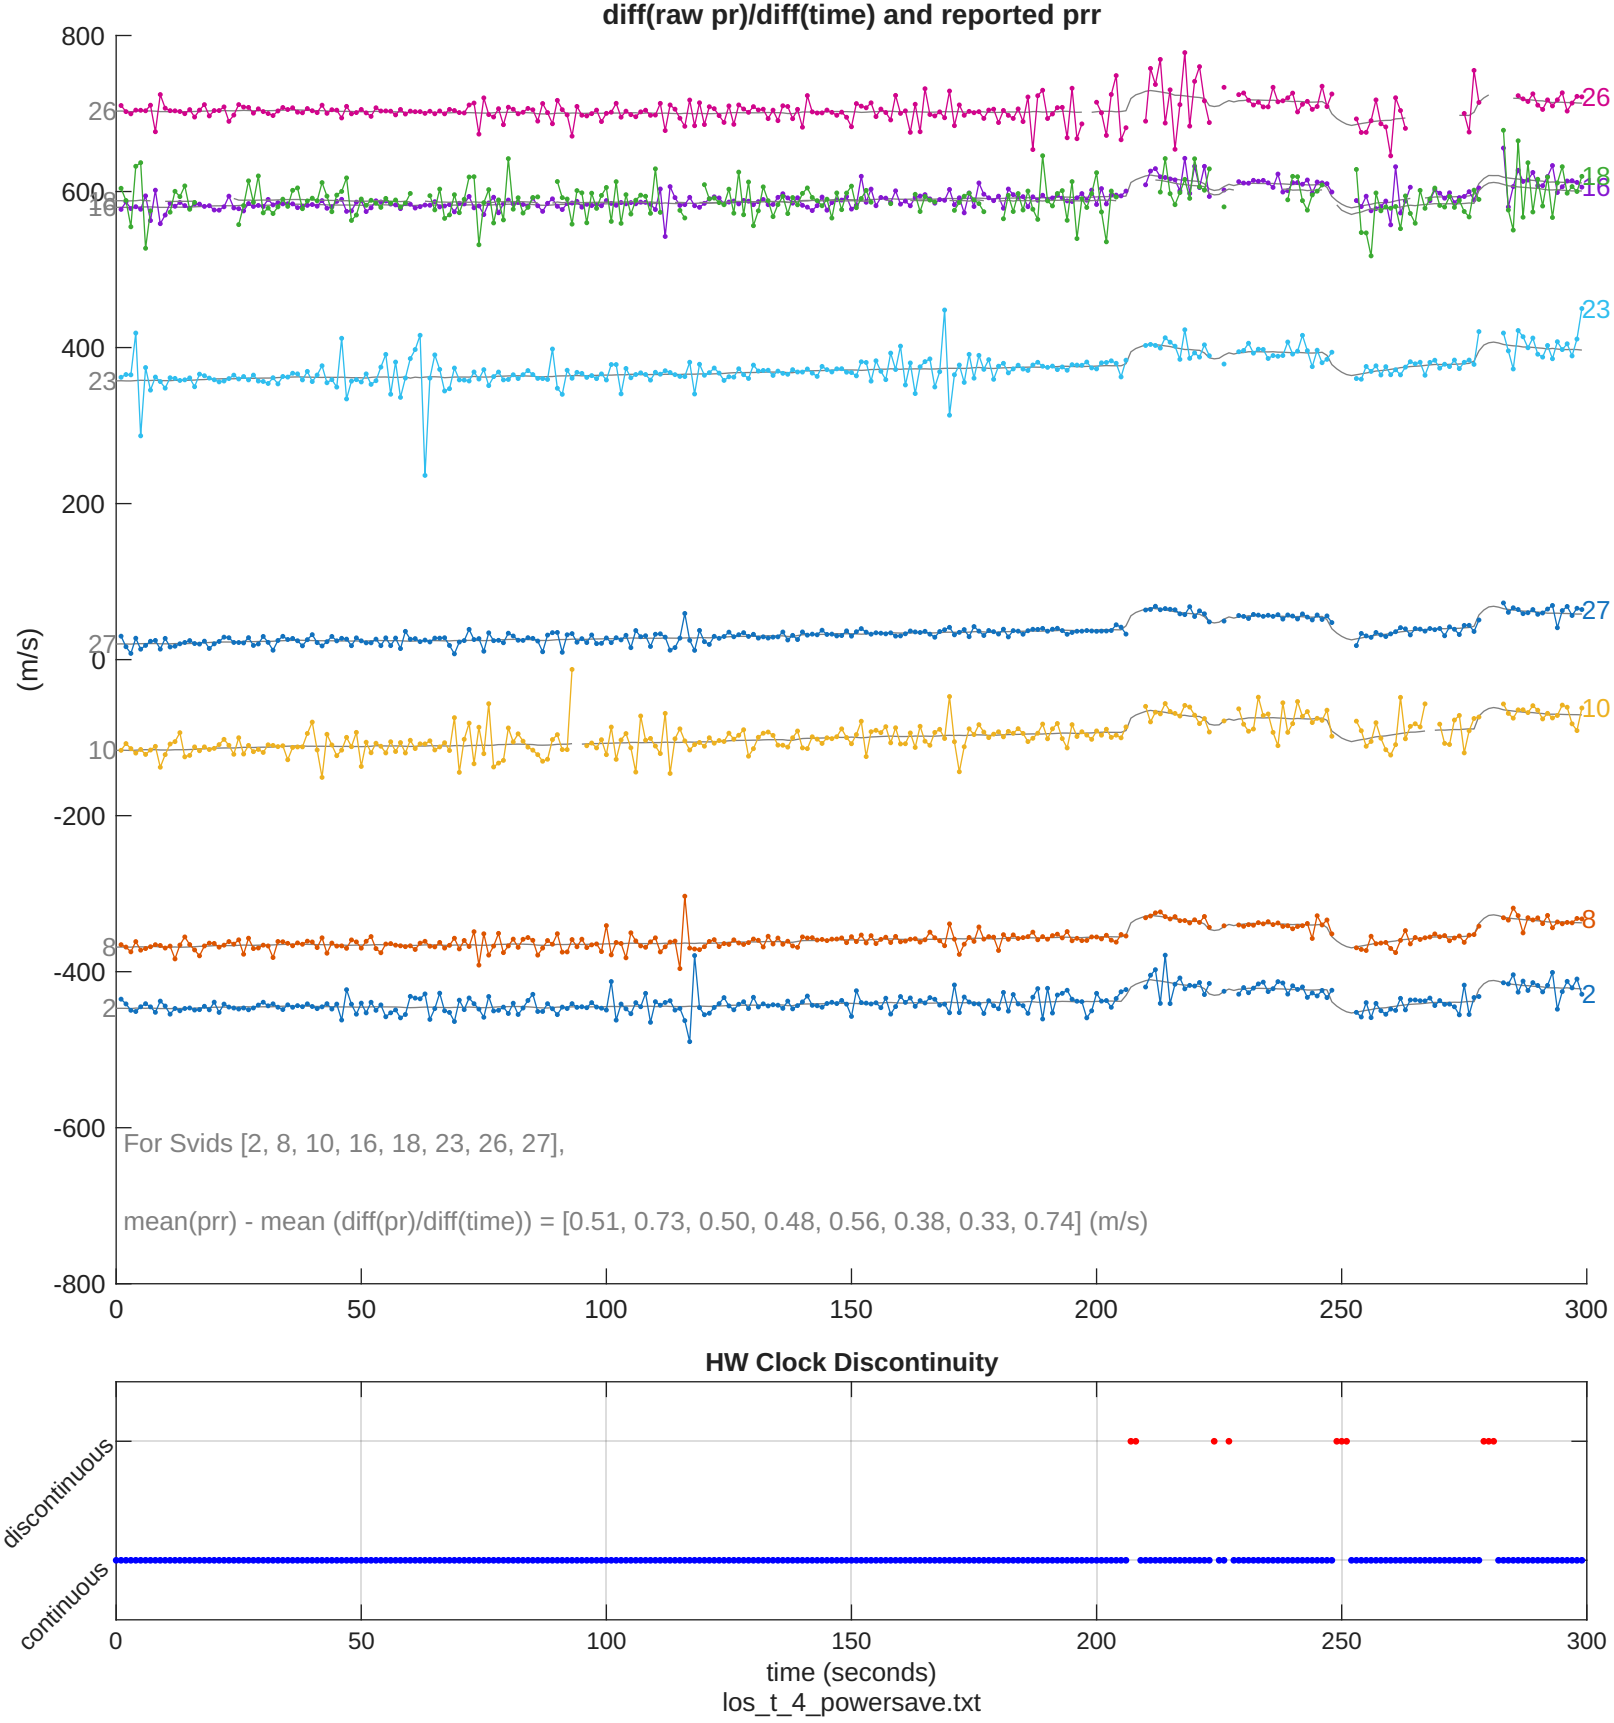
diff(raw pr)/diff(time) and reported prr
(m/s)
For Svids [2, 8, 10, 16, 18, 23, 26, 27],
mean(prr) - mean (diff(pr)/diff(time)) = [0.51, 0.73, 0.50, 0.48, 0.56, 0.38, 0.33, 0.74] (m/s)
HW Clock Discontinuity
discontinuous
continuous
time (seconds)
los_t_4_powersave.txt