

HLK 201

Helicopter Design

A group of four business professionals in an office setting. A man in a dark suit is shaking hands with a woman in a dark blazer. Another woman in a light blue shirt stands between them, smiling. A fourth person, an older man in a brown suit, is partially visible on the left. The background is a blurred office interior with large windows.

GET TO KNOW EACH OTHER

CONTENT

INTRODUCTION	—	01
Title	—	02
Title 3	—	03
Title 4	—	04
Title 5	—	05
Title 6	—	06

INTRODUCTION



Aircrafts




Fixed Wings

FORCES	<-	PRODUCER
1. Thrust	<-	Engine
2. Lift	<-	Wings
3. Maneuver	<-	Control Surfaces

Rotary Wings

FORCES	<-	PRODUCER
1. Thrust	<-	Engine
2. Lift	<-	Blades
3. Maneuver	<-	Control Surfaces

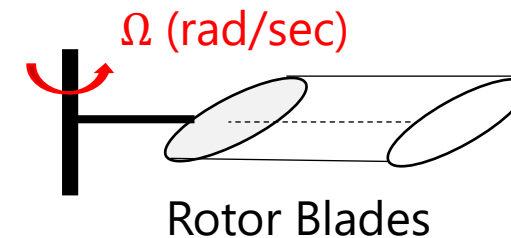


INTRODUCTION

Rotary Wings

The Far Wake Velocity Formation : Airflow in the Stream Tube

- Considering the helicopter in climb, one can see that the flow enters the stream tube far upstream of the rotor and then passes through the rotor itself, finally passing away from the rotor forming the wake.

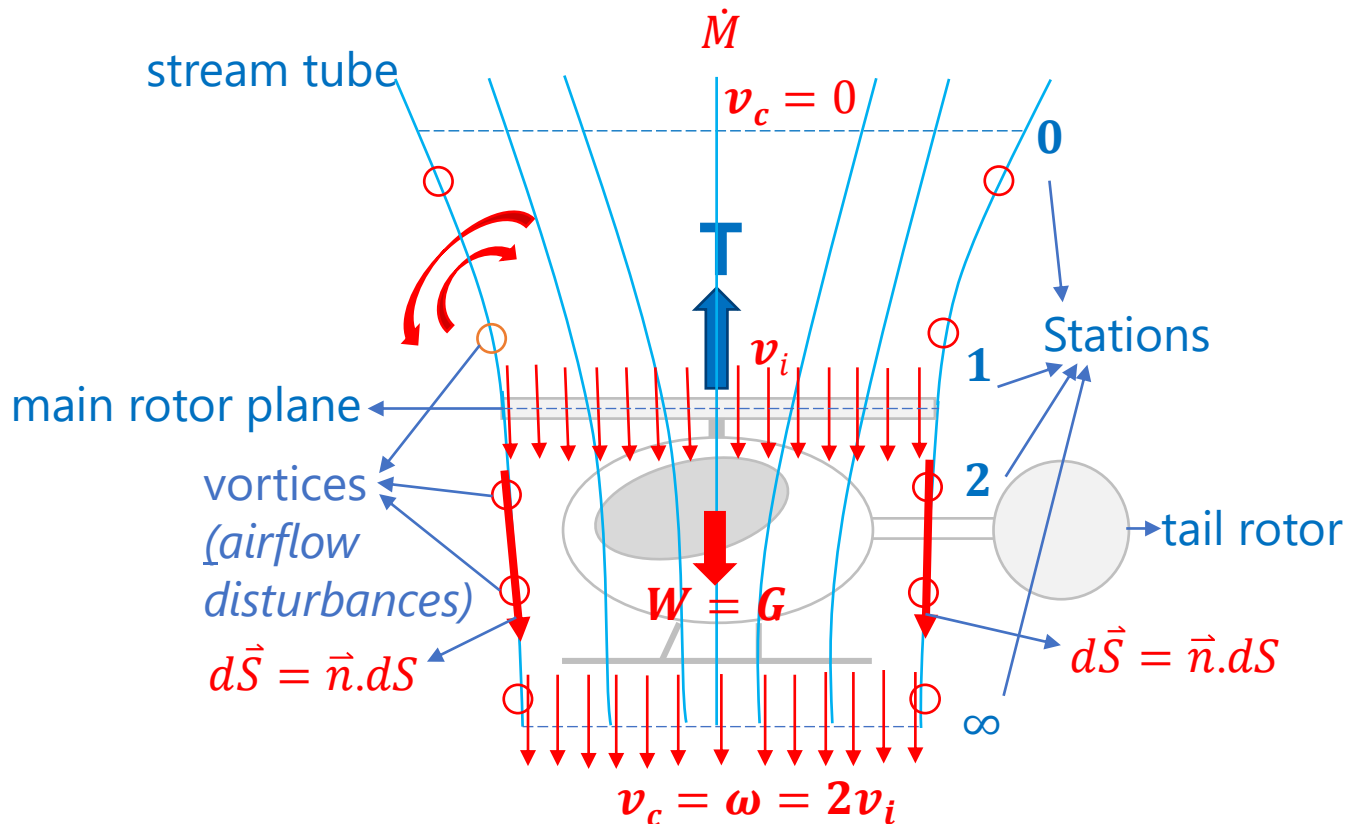

0: the plane far upstream of the rotor. $v_c = 0$

1: the plane just above the rotor disk.

2: the plane just below the rotor disk.

∞ : the far wake section. $v_c = \omega = 2v_i$

v_c : the Air Velocity (entering into Streamtube)

v_i : the Induced Velocity

\dot{M} : the Flux

ω : the Far Wake Velocity

T : the Thrust

W : the Weight

\vec{n} : the Unit Normal Vector oriented outward the control volume

$d\vec{S}$: the Unit Normal Area Vector

INTRODUCTION

Newton's Law of Motion

- **1st Movement : Thrust Formation** : *The Conservation of Momentum (Newton's 1st Law: The Law of Inertia)*

$$2v_i = \omega$$


induced velocity *far wake velocity*

- **2nd Movement : Displacement of Body** : *The Conservation of Mass (Newton's 2nd Law)*

$$F = ma = m \frac{d\vec{v}}{dt}$$

- **3rd Movement : Displacement of Volume** : Action and Reaction

$$L = W$$
$$T = D$$

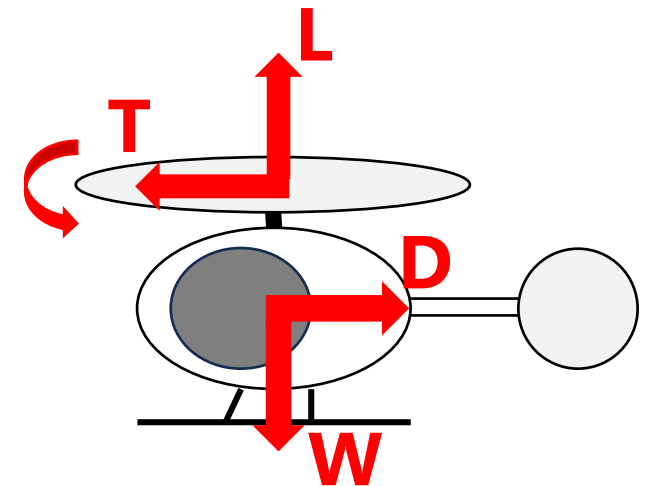


INTRODUCTION

Main Rotor Systems

- In the design, the velocity of the main rotor system must be found firstly.


- i. Single Rotor

(Conventional Helicopter)

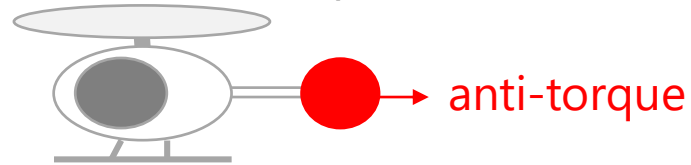


- ii. Multi-Rotors

- i. Coaxial

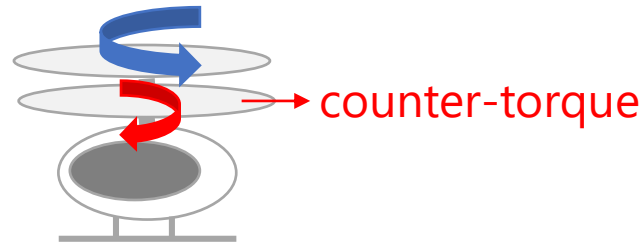

- ii. Tandem

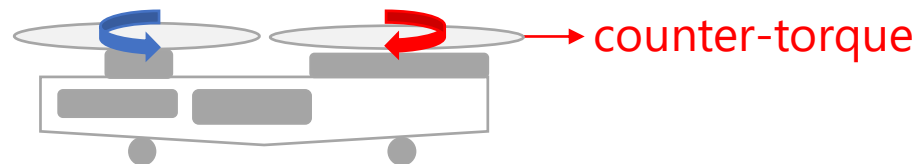

CONTENT


Title 1	—	01
FLIGHT REGIMES	—	02
Title 3	—	03
Title 4	—	04
Title 5	—	05
Title 6	—	06

FLIGHT REGIMES

Hover, Forward, Axial


1. Hover
2. Forward
3. Axial

HOVER

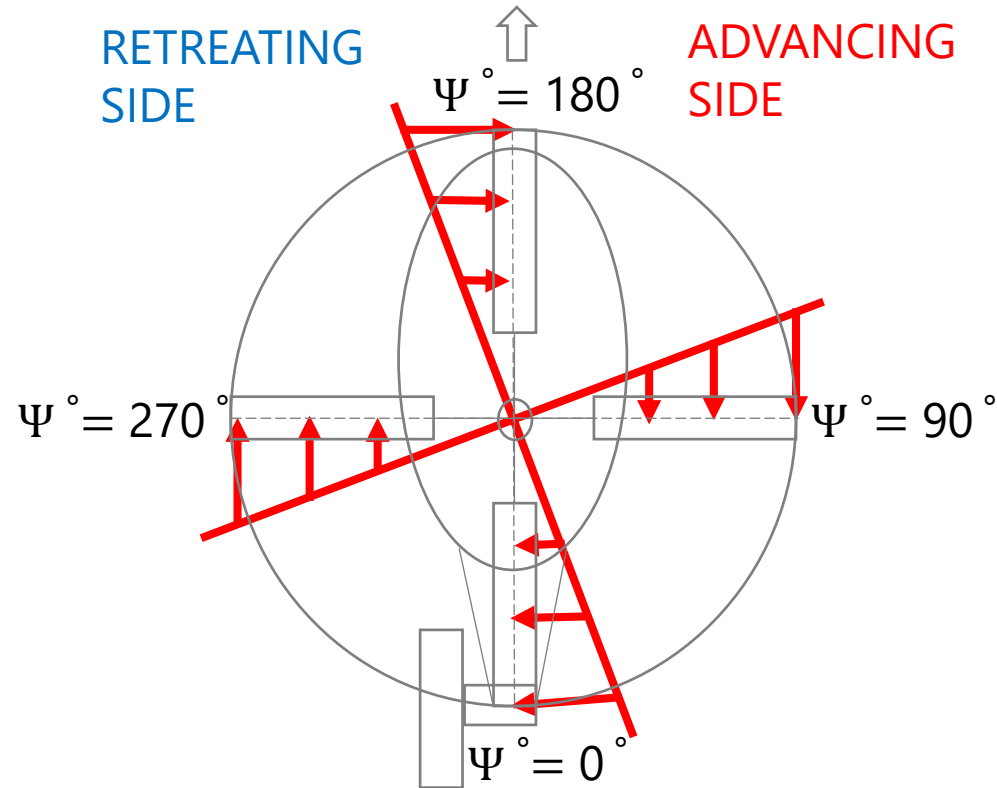

Linear Velocity Distribution, symmetric Velocity Distribution

FORWARD

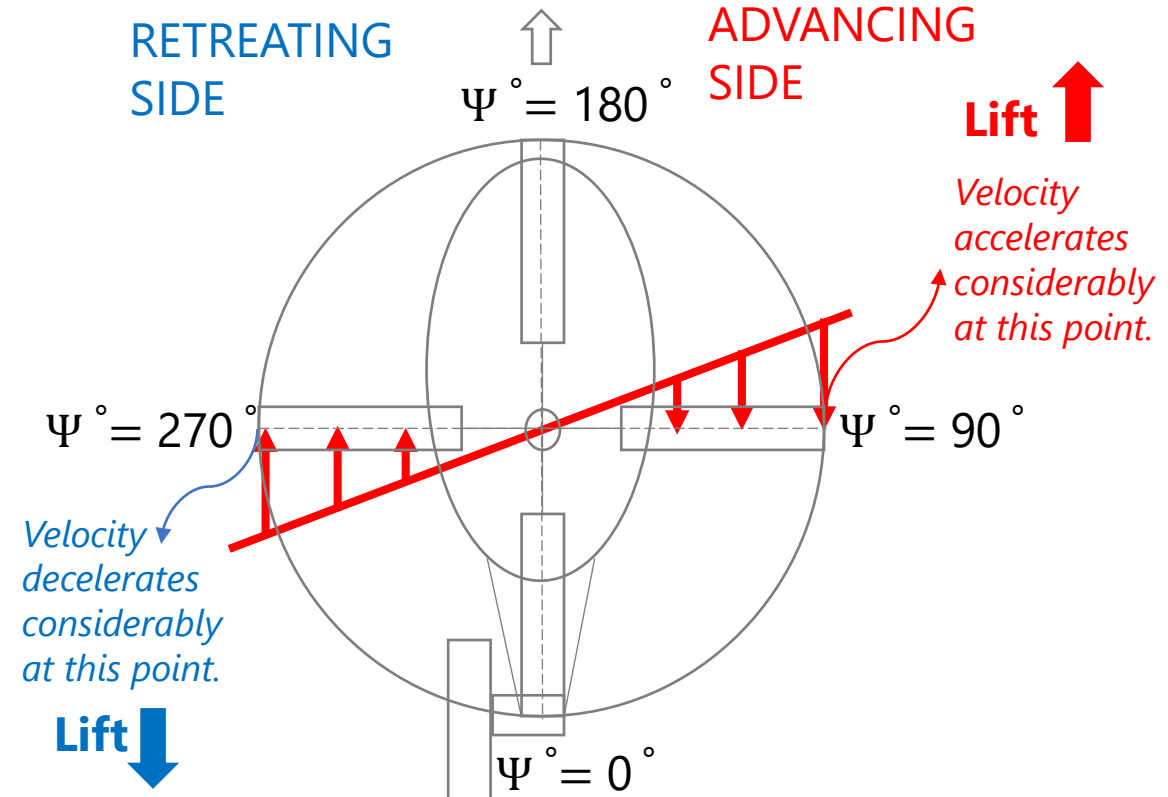

Linear but Non-symmetrical Velocity Distribution

The velocity distribution creates an imbalance of moments on the aircraft. To overcome this, there must be a control system on the aircraft.


Ψ = azimuth angle

FLIGHT REGIMES

Forward Flight

Formation of the Overturning Moment in the Forward Flight

- The attack angle of the advancing side blade is adjusted to a lower value as it nears 90° degrees to mitigate the overturning moment. The angle of attack in a retreating blade is increased.




- **The Collective Control** is a **throttle valve** and a **lever system** that **increases engine power** by opening the throttle **to increase engine torque** while **keeping the rotor speed constant**, and it can simultaneously **increase the Angle of Attack of the blades**. It also includes a push-pull wire system that can **move the swashing plate up and down**.
- **The Cyclic Control** is giving rotary directions in the pitch, the roll and the yaw axes.

FLIGHT REGIMES

Cockpit Flight Controls: Collective, Cyclic and Pedals


THE CYCLIC CONTROL

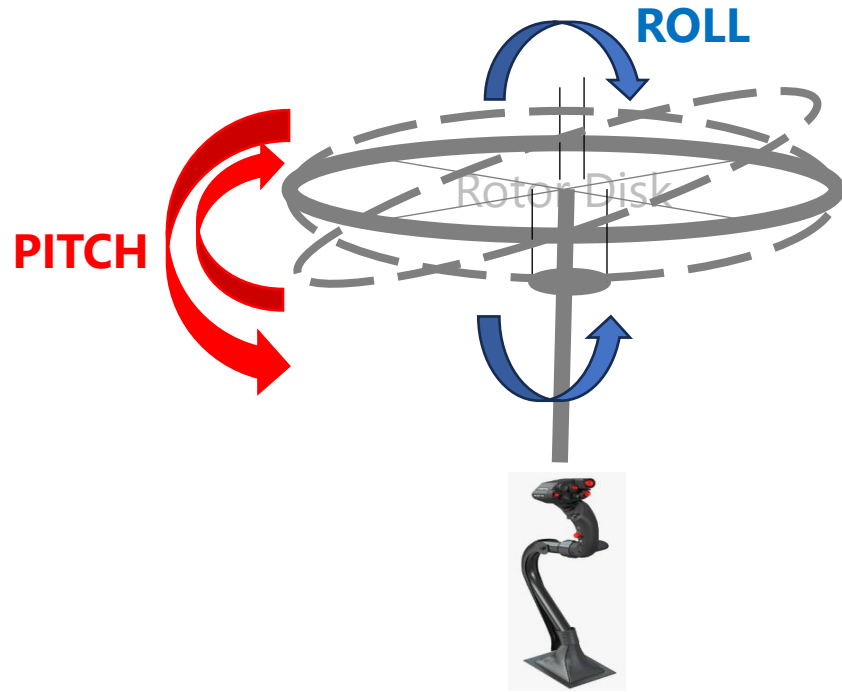

Cyclic

Making Pitch and Roll Maneuvers


THE COLLECTIVE CONTROL

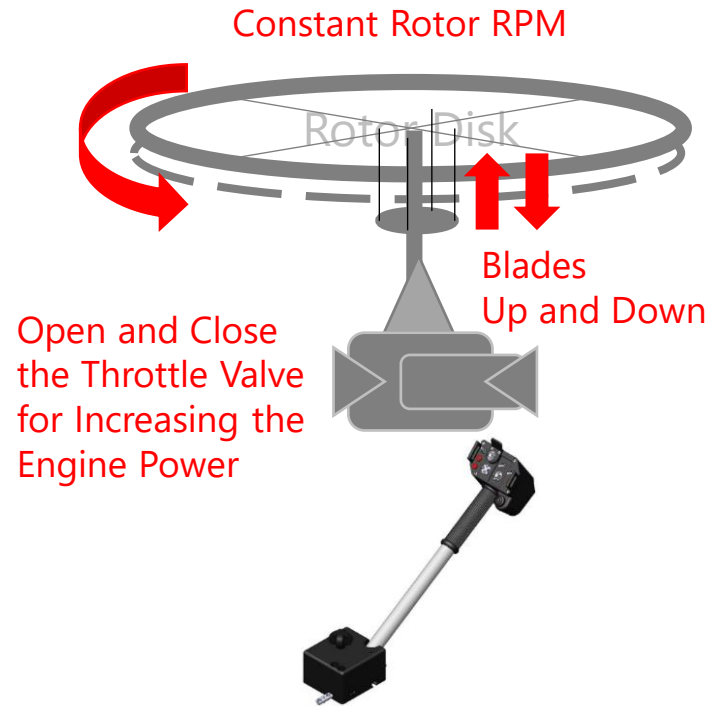

Collective

Acceleration / Deceleration

THE PEDAL CONTROL

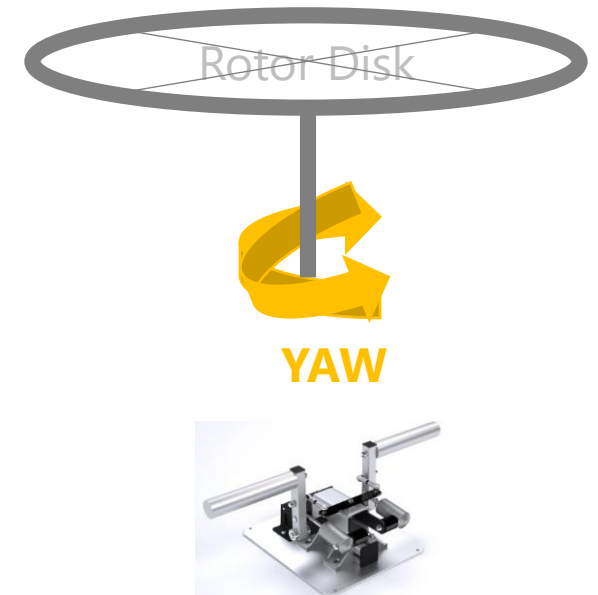

Pedals

Turning Right and Left

FLIGHT REGIMES

Helicopter Design Considerations

- Weightlifting and vibration issues are always present in helicopters.
- The larger the rotor disk area, the better the rotor performance.
- This principle applies to compound or coaxial helicopters, allowing them to accelerate without the blades exceeding the speed of sound.

Questions

- What is the maximum altitude needed for hovering?
- What range is required?

CONTENT

Title 1	—	01
Title 2	—	02
HELICOPTER AERODYNAMICS	—	03
Title 4	—	04
Title 5	—	05
Title 6	—	06


HELICOPTER AERODYNAMICS

Theories

- Momentum Th

- Blade Element

- Angle of attack
- Twist
- Taper ratio
- Airfoil Distribution

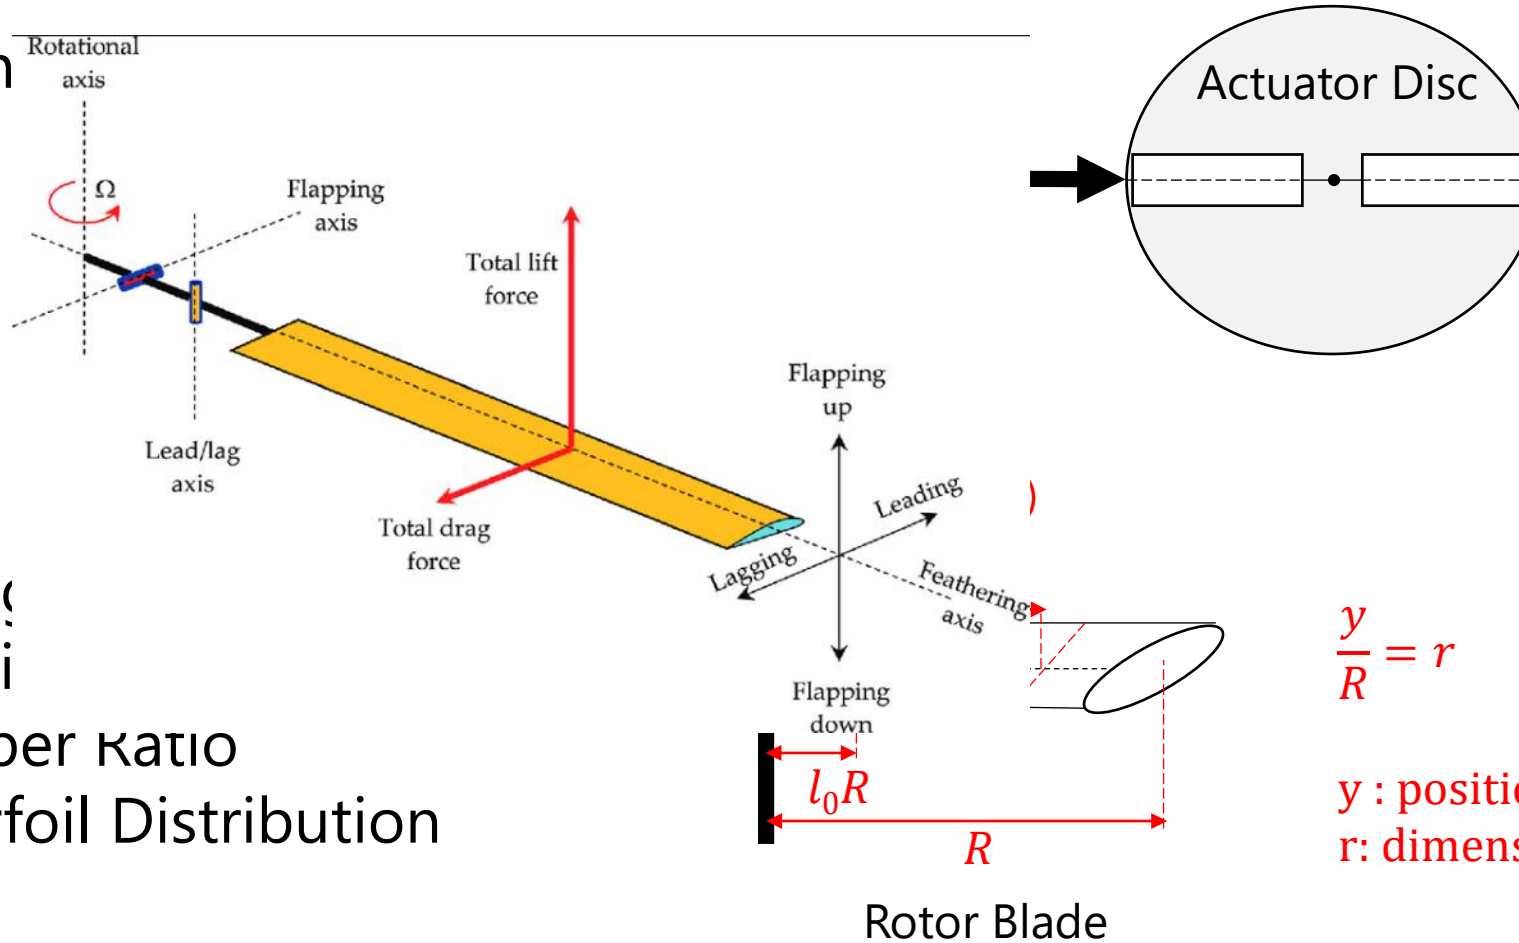


$$\frac{y}{R} = r$$

y : position with dimension
 r : dimensionless position

HELICOPTER AERODYNAMICS


Blade Element Theory

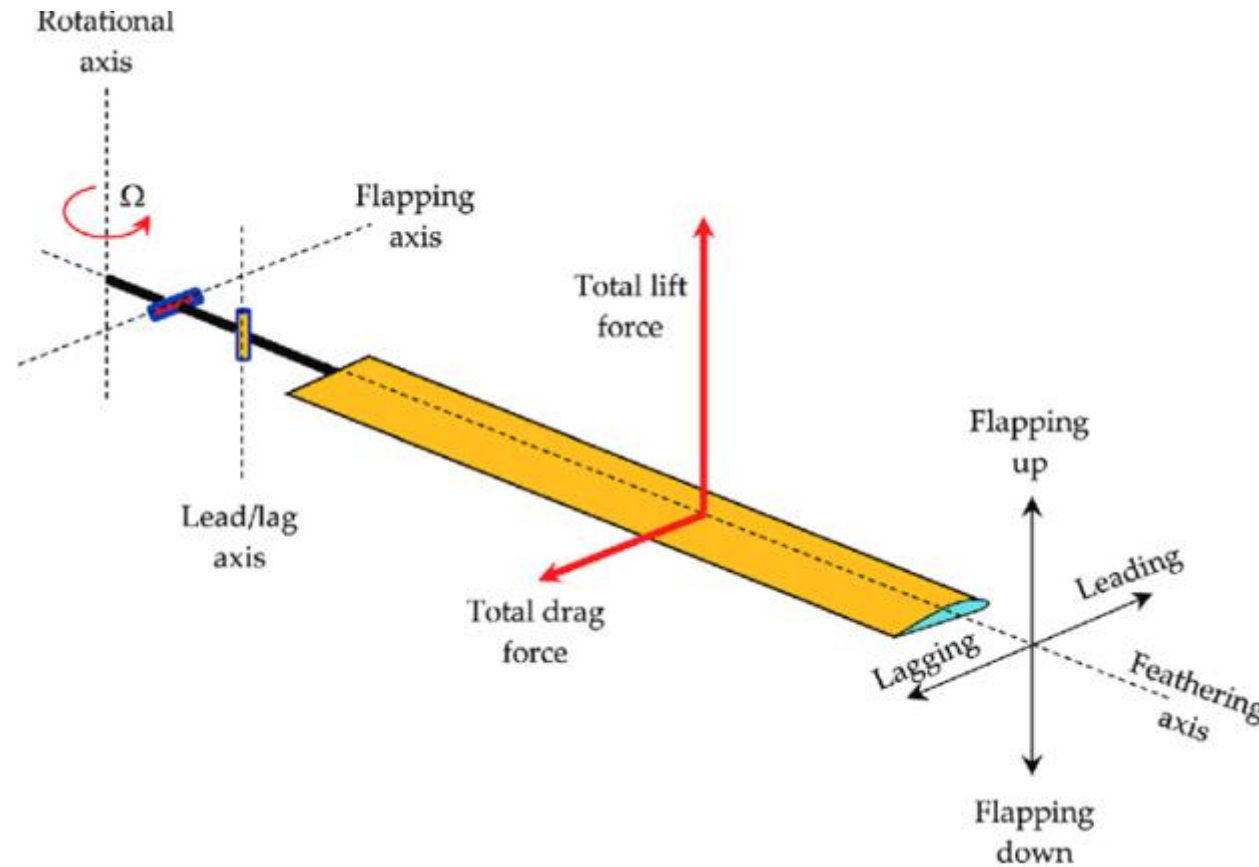


HELICOPTER AERODYNAMICS

Blade Element Theory

- **Angle of Attack (α)**

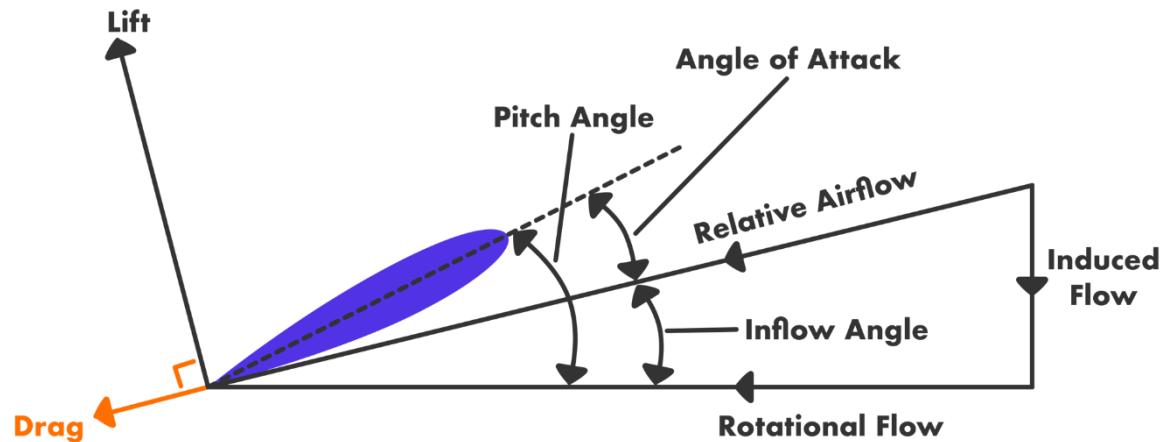




- **Twist Ratio**

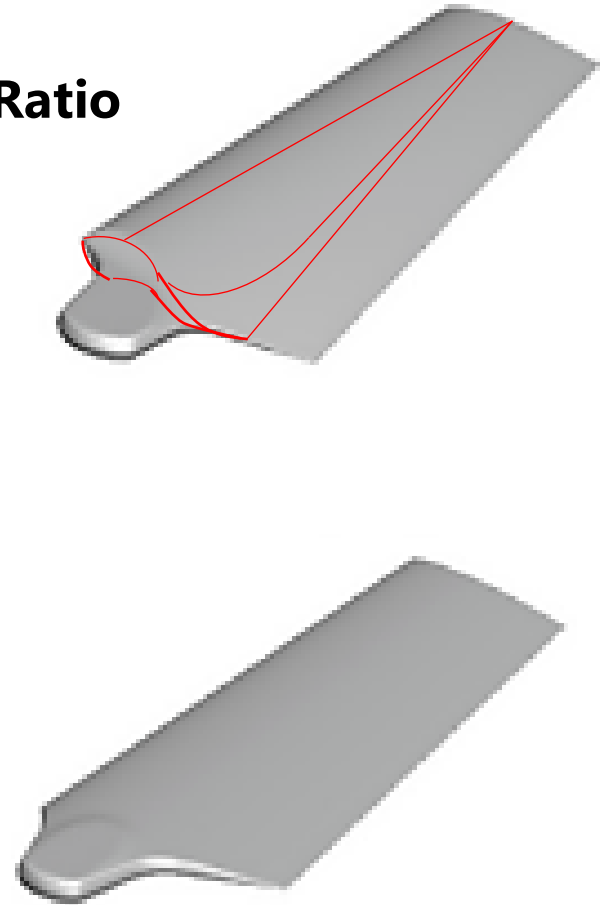

HELICOPTER AERODYNAMICS

Blade Element Theory


- Taper Ratio

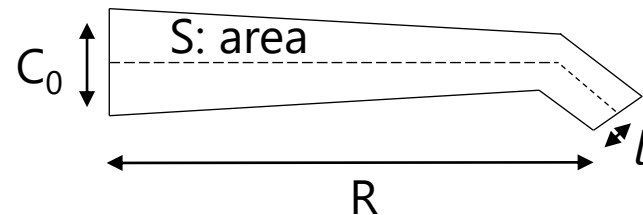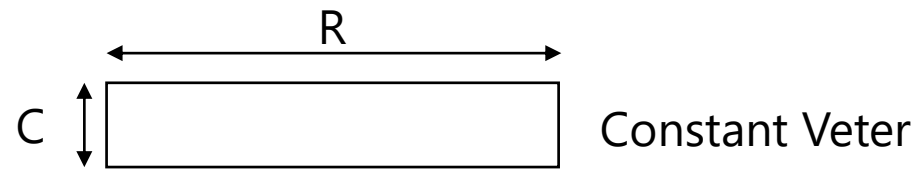

$$C_{mean} = \frac{S}{R}$$

S : Reference Planform Area
 C_{mean} is the mean veler

- Airfoil Distribution

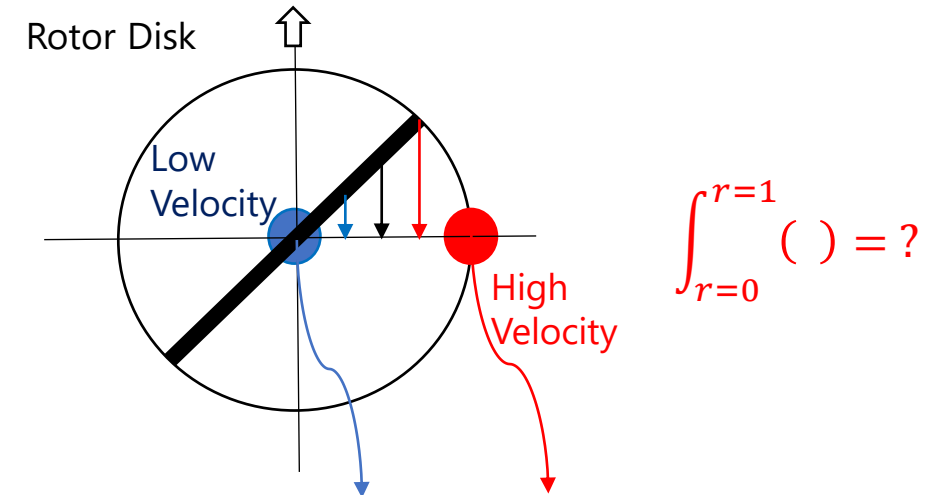

The root of the veler is thick, so, it can produce better lift.

The tip of the Veler is **thick to reduce vortex formation.**

HELICOPTER AERODYNAMICS

Blade Element Moment Theory

- The Blade Element Moment Theory is used for **Performance Analysis**:

The Blade Element Momentum Theory operates by utilizing **the outputs of the Blade Element Theory**. Subsequently, it proceeded to **Performance Analysis**.

CONTENT

Title 1 — 01

Title 2 — 02

FLIGHTS & POWER CONSUMPTIONS — 03

Title 4 — 04



Title 5 — 05

Title 6 — 06

POWER CONSUMPTIONS

HOVER

1. **Induced Power (P_i) Consumption:** Induced Power is the power exerted to create Thrust. Induced Power is always higher in Hover mode. In Forward Flight, Induced Power Consumption increases with the speed increase. Also, if the speed increases too much, the Induced Power Consumption will increase again.

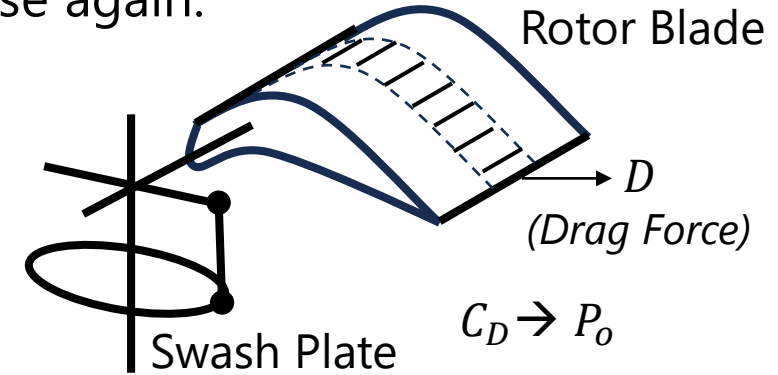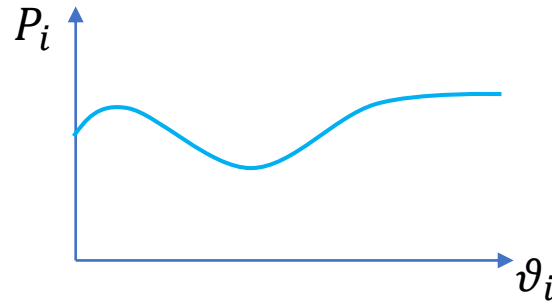

2. **Profile Power (P_o) Consumption:** Profile Power Consumption is to be able to rotate the rotor blades in the air.


$$Velocity = \frac{dx}{dt}$$

$$Power = \frac{Work}{Time} = \frac{Force \times Displacement}{Time} = Force \times Velocity$$

$$P_i = T v_i \quad (Induced Power = Thrust \times Induced Velocity)$$

POWER CONSUMPTIONS

HOVER

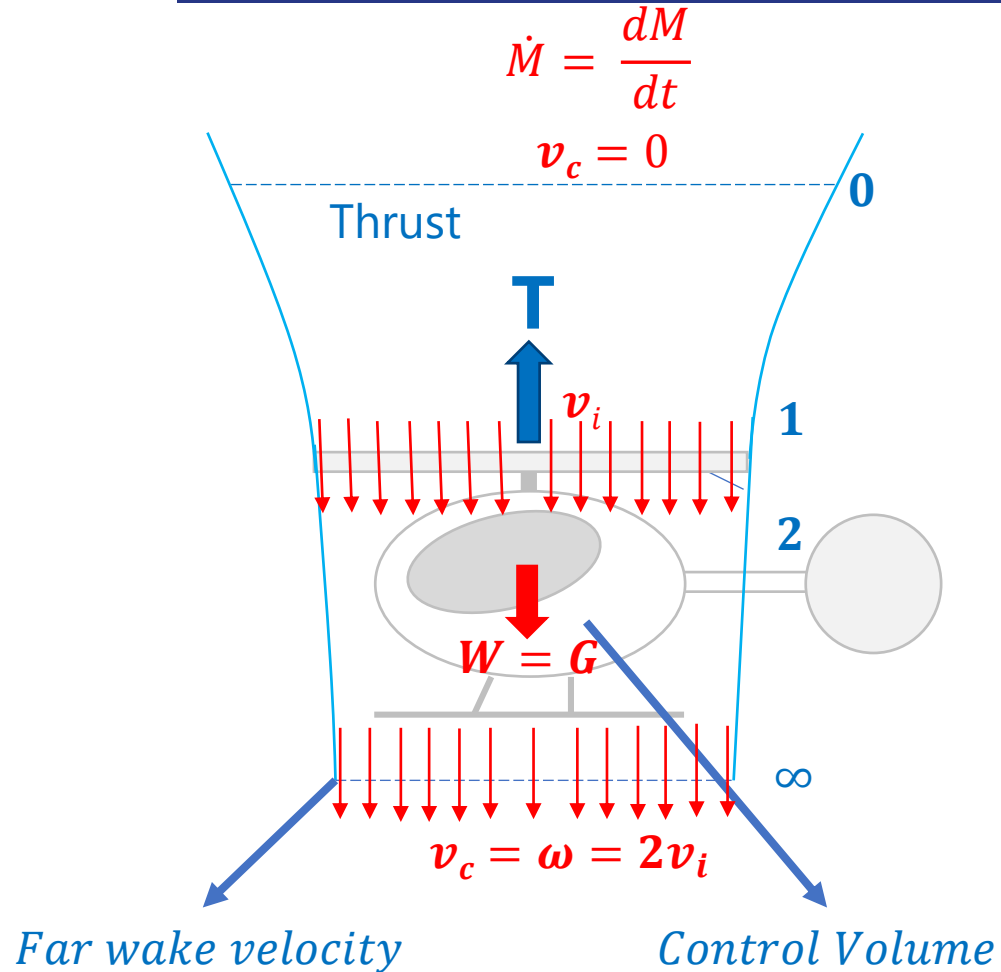

- “Induced power *is proportional to the cube of the induced velocity.*”

$$P_i \propto v_i^3$$

↓
proportional

Long Rotor Blades \rightarrow Low $v_i \rightarrow$ Low P_i

\rightarrow Excess Weight

\rightarrow Storage Problem

\rightarrow Change of velocity fields (shock waves, stall, i.e.)

- “Thrust *is proportional to the square of the induced velocity.*”

$$T \propto v_i^2$$

If we make helicopter rotor blades too long, the induced velocity (v_i) will be low. Since the thrust (T) will be the same for the same aircraft, the induced power (P_i) will also be lower.

POWER CONSUMPTIONS

HOVER

3. Parasite Power Consumption:

4. Tail Rotor Power Consumption: The Tail Rotor consumes **5%** of the power of the Main Rotor's in Hover.

The **Power Ceiling** is higher than the **Hover Ceiling**.

- **Hover Ceiling:**
 - This is the **maximum altitude at which the helicopter can hover**
 - **HOGE** → Hover Out of Ground Effect
 - **HIGE** → Hover In Ground Effect)

Hovering requires **very high power** because:

- There is no translational lift
- Induced power demand is at or near its maximum

- **Hover Ceiling** is determined by the **Excess Power**.

POWER CONSUMPTIONS

FORWARD FLIGHT

1. **Induced Power Consumption:**
2. **Profile Power Consumption:** Since the rotor blades are rotating, there will definitely be Profile Power Consumption.
3. **Parasite Power Consumption:** The power required from the engine to overcome the drag force acting on the «wetted area» (excluding rotor blades) and propel the aircraft forward.
4. **Tail Rotor Power Consumption:** The Tail Rotor consumes **7%** of the power of the Main Rotor's in the Forward Flight.

POWER CONSUMPTIONS

FORWARD FLIGHT

Engine → Available Power

Flight Mission & Design Mission → Required Power


Excess Power = Available Power – Required Power

$$h \uparrow \rho \downarrow, (\rho_0 = 1,225 \frac{kg}{m^3})$$

$$P_{(available)} = P_{(available)_{(0)}} \quad (\text{at Sea Level}), h \rightarrow \text{altitude}$$

↑
engine

$$P_h = P_{(ava)_h} = P_{(ava)_0} \left(\frac{\rho}{\rho_0} \right)$$


$$\dot{M} = \frac{dM}{dt}$$

Rotorcraft fly in the lower layers of the atmosphere.

POWER CONSUMPTIONS

FORWARD FLIGHT

- **Power Ceiling**

This is the **maximum altitude at which the helicopter can maintain powered flight** (usually in forward flight, climbing or cruising).

- In forward flight:
- Translational lift reduces induced power
- The rotor is more aerodynamically efficient
- Less power is required than in a hover

Power required in Hover > Power required in Forward Flight

- So the helicopter runs out of hover capability before it runs out of powered flight capability as altitude increases.

Ceiling Type	Relative Altitude
Hover Ceiling	Lower
Power Ceiling	Higher

POWER CONSUMPTIONS

FORWARD FLIGHT

- The Effect of Altitude: The power provided by the engine ($P_{(ava)}$) decreases. The Main Rotor Power Consumption (P_{req}) increases. Ultimately, the Excess Power (P_{exc}) decreases.
- Excess Power determines factors for us such as flight speed, range, endurance and descent/ascent (vertical maneuvers') rate.

CONTENT

Title 1 — 01

Title 2 — 02

Title 3 — 03

MOMENTUM THEORY — 04


Title 5 — 05

Title 6 — 06

MOMENTUM THEORY

The momentum theory does not provide information about rotor blade geometry. Consequently, it is inadequate for design purposes. However, it helps us find the power consumption and requirement.

HOVER:

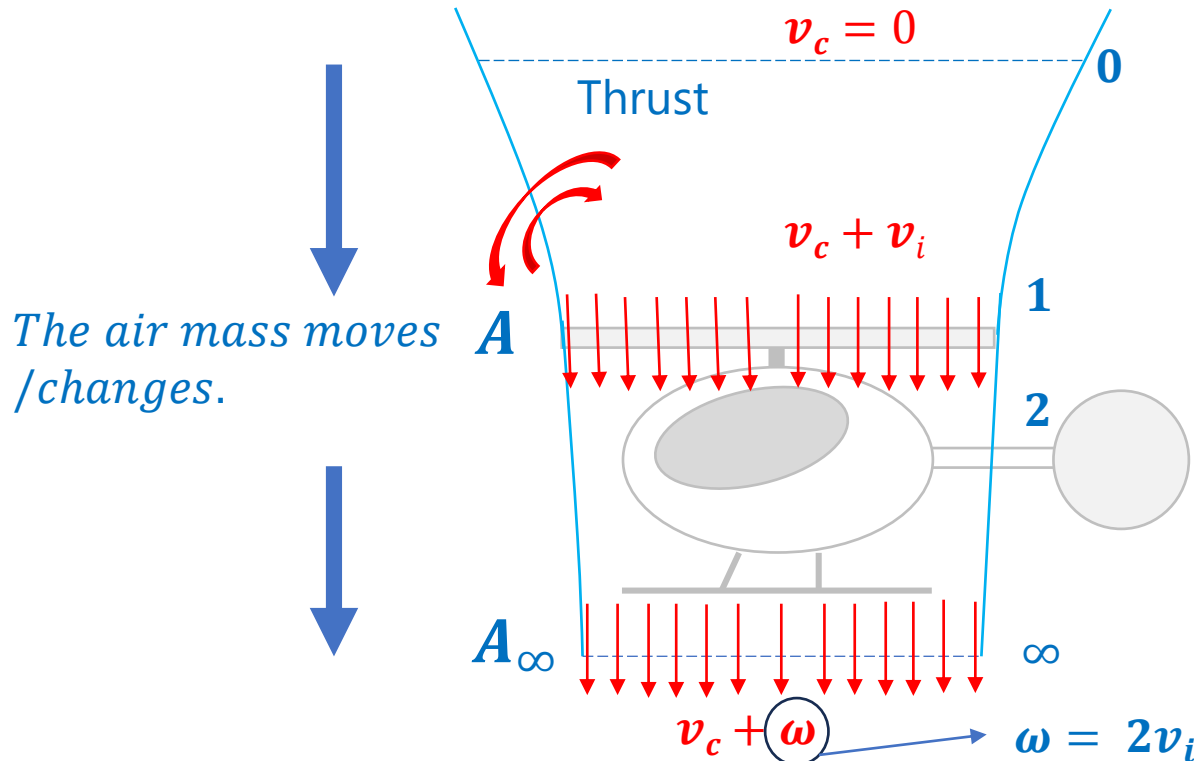

v_c = Rate of Climb/Descent (Vertical/Axial Flight Velocity)

v_i = Induced Velocity

ω = Far wake velocity

MOMENTUM THEORY

LAWS OF CONSERVATION

Laws of Conservation:

1. Conservation of Mass

$$\text{Flow Rate} = \dot{m} = \frac{dm}{dt} = \rho A v_i = \rho A_\infty \omega$$

$A = \pi R^2$, A : Rotor disk area, A_∞ : Disk area at the ∞ station.

2. Conservation of Momentum

$$\sum \vec{F} = m\vec{a} = \frac{dm\vec{v}}{dt} \quad (\text{Newton's 2nd Law}), \quad \vec{a} = \frac{d\vec{v}}{dt} \quad (\text{Acceleration}), \quad \mathbf{T} = \dot{m}\omega \quad (\text{Thrust})$$

(Newton's 3rd Law: Action and Reaction)

If there is no unbalanced force on the system, momentum is conserved.

MOMENTUM THEORY

LAWS OF CONSERVATION


3. Conservation of Energy

Work-Energy Principle:

$$\omega = 2\vartheta_i$$

$$T_1 + \sum W_{1 \rightarrow 2} = T_2$$

$$T_1 + U_1 = T_2 + U_2 \quad (\text{Conservation of Energy})$$

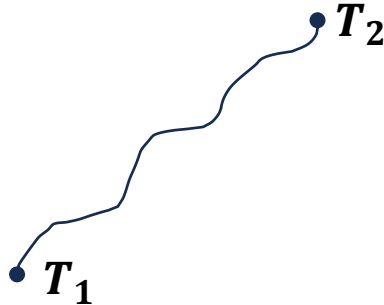

T_1 : Kinetic Energy at Position 1

T_2 : Kinetic Energy at Position 2

U_1 : Potential Energy at Position 1

U_2 : Potential Energy at Position 2

$W_{1 \rightarrow 2}$: Work of going from Position 1 to Position 2

When designing an aircraft, you first need to consider the weight. Then the design of the rotor blades, which will bear this weight, must be done. Momentum Theory only gives the flight disk.

MOMENTUM THEORY

Laws of Conservation

- Laws of Conservation

Momentum Theory

Mass $\longrightarrow T = \dot{m}\omega$


Energy $\longrightarrow \dot{m} = \frac{dM}{dt}$ $\rho A_\infty \omega = \rho A \vartheta_1$

$$\cancel{\rho \pi r_\infty^2} \omega = \cancel{\rho \pi R^2} \vartheta_i$$

$$\frac{r_\infty^2}{R^2} = \frac{\vartheta_i}{\omega} = \frac{\vartheta_i}{2\vartheta_i} = \frac{1}{2}$$

$$\frac{r_\infty}{R} = \frac{1}{\sqrt{2}} = 0.707 \text{ (contraction ratio)}$$

\swarrow Ideal State
 \searrow Real (Viscous Flow) = 0.78

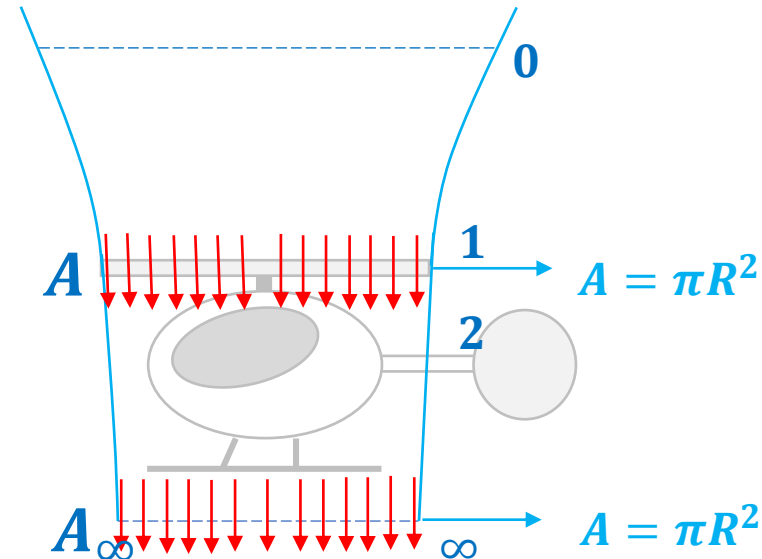

Air molecules cannot move as freely as they would in an ideal state.

MOMENTUM THEORY

Laws of Conservation

- **Assumptions on Flow in the Rotor:**

Assumptions are made to simplify things.

1. One Dimensional: Flow properties vary in the vertical direction.
2. Quasi-Steady: The flow properties at a point are constant.
3. Incompressible: The fluid density is constant.
4. Inviscid: It is ideal flow without viscosity.

Hover:

Induced Power \rightarrow minimum $\rightarrow P_i \rightarrow$ uniform induced velocity (v_i) distribution

Profile Power

Tail Power

Non-ideal flow: \rightarrow Non-uniform flow on the rotor disk.
 \rightarrow Wake vortex.

MOMENTUM THEORY

INDUCED POWER CONSUMPTION

- **Induced Power Consumption:**

Power = Force x Velocity

$$P_i = T v_i = \frac{T^{\frac{3}{2}}}{2\rho A}$$

Speed thru rotor blades

$P_i \propto v_i^3$ → (Induced power consumption is proportional to the cube of the speed passing thru the rotor blades.)

$T = \dot{m} \omega = \dot{m}(2v_i) = 2\rho A v_i v_i^{v_i^2}$ → (Thrust is proportional to the square of the velocity passing thru the rotor blades.)

$$v_i = \sqrt{\frac{T}{2\rho A}}$$

$T = 2\rho A v_i^2$ → $A \uparrow \quad T \uparrow$ (Increasing the Length (the Area) of the rotor blades a little is used to increase thrust.)

MOMENTUM THEORY

DIMENSIONLESS PARAMETERS

- **DISC LOADING (DL) and POWER LOADING (PL)**

- Dimensionless parameters (such as the Mach number, **M**) are used to be unaffected by environmental conditions.


- Disc Loading (DL)

- Power Loading (PL)

$$DL = \frac{T}{A} \quad (\text{Thrust per unit area.})$$

Hover Efficiency (Dimensional)

$$DL = \frac{T}{PL} \quad (\text{The thrust produced per unit of power consumption.})$$

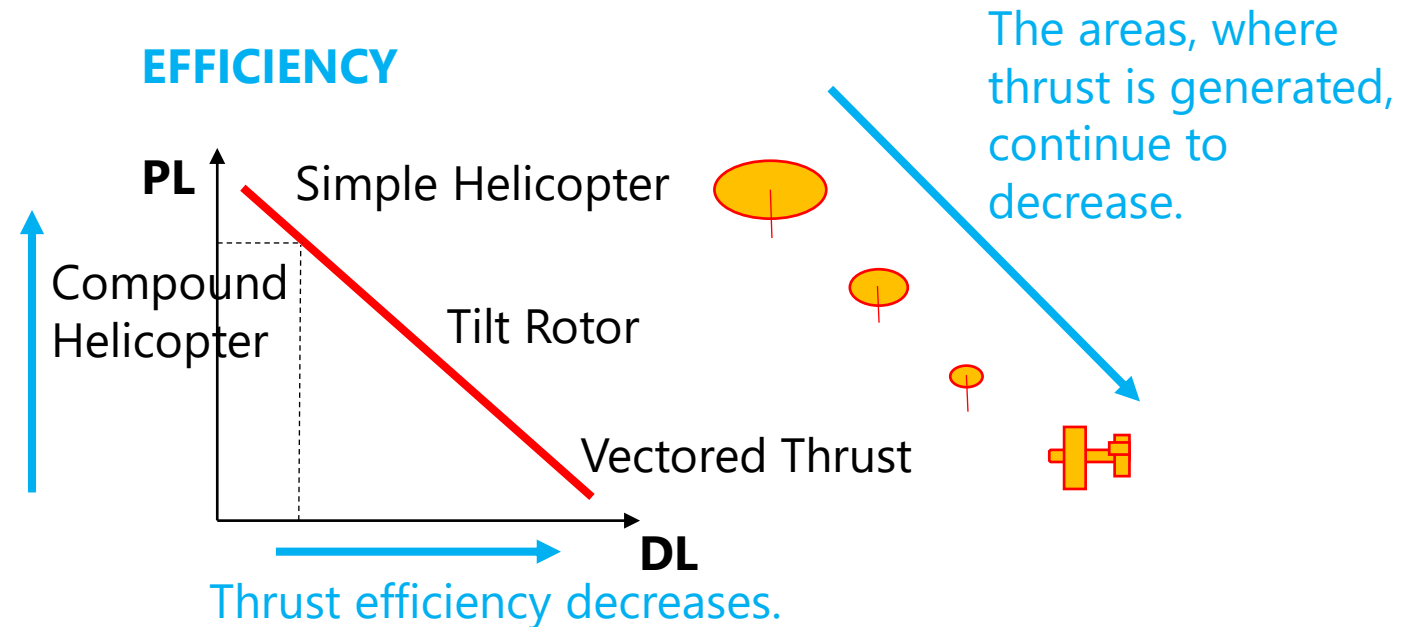

MOMENTUM THEORY

DIMENSIONLESS PARAMETERS

$$PL = \frac{T}{P_i} = \frac{T}{T \vartheta_i} = \frac{1}{\vartheta_i}$$

$$PL = \vartheta_i = \frac{T}{2\rho A}$$

$$DL \propto \frac{1}{PL} \quad DL = \frac{T}{A} \quad \text{Hover} = T A \quad (Nm^2) \quad \text{Thrust produced per unit area.}$$

For the same Thrust value: $DL \downarrow \quad A \uparrow \quad P_i \downarrow \quad PL \downarrow$

MOMENTUM THEORY

DIMENSIONLESS PARAMETERS

- **COEFFICIENT of THRUST**

$$C_T = \frac{T}{\rho A V_{tip}^2} = \frac{T}{\rho A (\pi R)^2} \quad V_{tip}: \text{Flight Velocity of Rotor Blade}$$


$$\frac{\text{Induced Ratio}}{\text{Induced Inflow Ratio}} \quad (\text{Dimensionless})$$

$$\lambda_i = \frac{v_i}{V_{tip}} = \sqrt{\frac{T}{2\rho A}}$$

$$\frac{1}{\Omega R} = \sqrt{\frac{T}{2\rho (\pi R)^2}}$$

$$\lambda_i = \sqrt{\frac{C_T}{2}}$$

coefficient min P_i

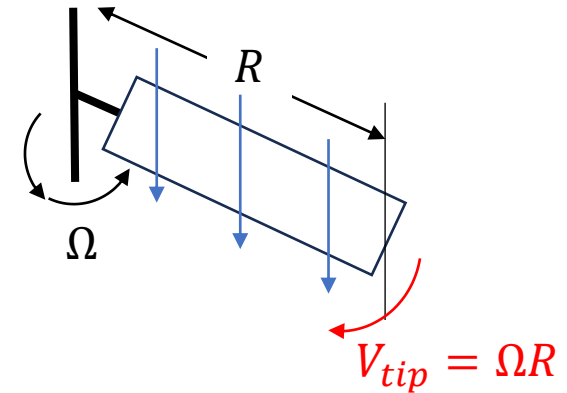

$$\lambda_i = \frac{v_i}{\Omega R}, \quad \lambda_i \text{ is constant.}$$

If it's increasing at a constant rate,
 λ_i causes the minimum induced
power consumption in Hover.

MOMENTUM THEORY

DIMENSIONLESS PARAMETERS

- **COEFFICIENT of INDUCED POWER**

$$P_i = T\vartheta_i$$

$$C_{P_i} = C_T \lambda_i = C_T \sqrt{\frac{C_T}{2}}$$

$C_{P_i} = \frac{\sqrt[3]{C_T}}{\sqrt{2}}$ → ideal → $C_{P_i} = K C_T^{\frac{3}{2}}$

Induced Power Correction Coefficient

115-125

- Viscosity
- Flight Loss
- Vortex
- Transmission

MOMENTUM THEORY

DIMENSIONLESS PARAMETERS



- **COEFFICIENT of TORQUE**

$$C_Q = \frac{Q}{\rho A R V_{tip}^2} = \frac{\frac{\rho}{\Omega} V_{tip}}{\rho A R V_{tip}^2} = \boxed{\frac{P}{\rho A R V_{tip}^3} = C_Q}$$

$P = \text{Force} \times \text{Velocity}$

$$P_i = T \vartheta_i = Q \Omega$$

Torque Angular Velocity

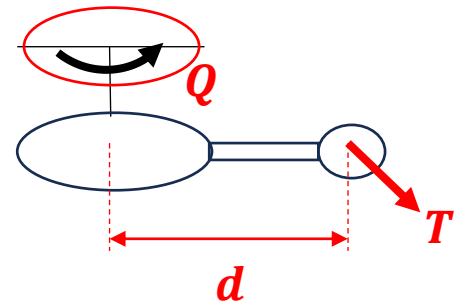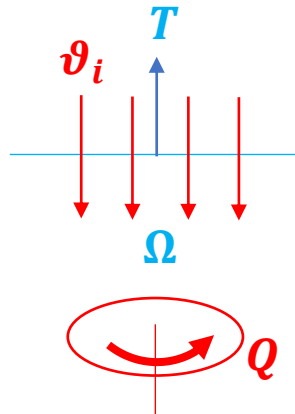


$$dT_t = Q$$

MOMENTUM THEORY

DIMENSIONLESS PARAMETERS

- COEFFICIENT of PROFILE POWER CONSUMPTION**

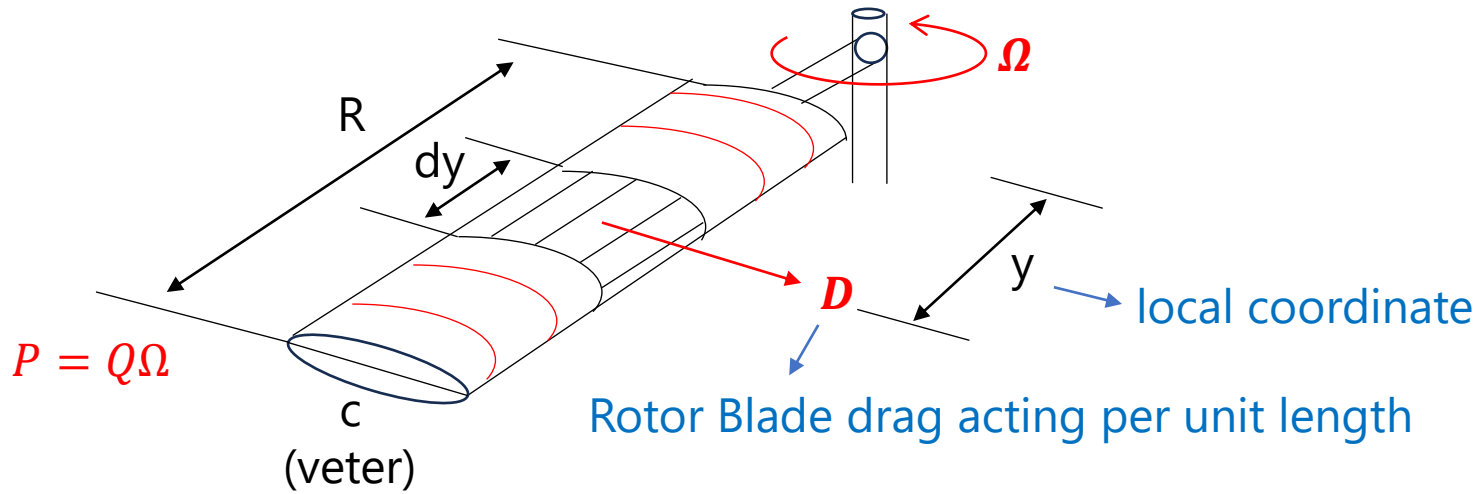

Coefficient of Profile Power Consumption

$$C_{P_0} = \int_0^1 \frac{1}{8} (\sigma_r) C_{d_0}$$

$r = \frac{y}{R} \rightarrow$ Dimensionless coordinate

Profile Power $\leftarrow P_0 = N_b \Omega \int_0^R D_y dy$

$D dy \rightarrow$ Drag acting on a section with a dy thickness

$\int_0^R D dy \rightarrow$ Torque Effect of the Cross-Section

MOMENTUM THEORY

DIMENSIONLESS PARAMETERS

- The calculation here is based on Blade Element Theory.

$$C_{Pi} \left\{ \begin{array}{ll} \int_0^R D_y dy \longrightarrow & \text{Torque Effect of a Rotor Blade} \\ \Omega \int_0^R D_y dy \longrightarrow & \text{Profile Power Consumption of a Rotor Blade} \\ N_b \Omega \int_0^R D_y dy \longrightarrow & \text{Profile Power Consumption of all Rotor Blades} \end{array} \right.$$

$$C_{Pi} = \frac{C_T^{\frac{3}{2}}}{\sqrt{2}} \longrightarrow \text{Propulsion}$$

↓
Coefficient of
Induced Power Consumption

$$C_{Po} = \frac{1}{8} \sigma C_{d0} \begin{array}{l} \longrightarrow \text{Drag} \\ \searrow \text{Drag Coefficient} \\ \swarrow \text{Rotor Solidity} \end{array}$$

↓
Coefficient of
Profile Power Consumption

(Drag is assumed to be the same across all sections.)

MOMENTUM THEORY

DIMENSIONLESS PARAMETERS

- **Solidity**


$$\sigma = \frac{\text{Total Area of Rotor Blade}}{\text{Rotor Disc Area}} = \frac{N_b(R_c)}{\pi R^2} = \frac{N_b c}{\pi R}$$



On rectangular platforms, the σ variation is generally dependent on the N_b variation.



The tapered rotor blades are also generally dependent on N_D , σ , which is related to the chord change in the axial direction.

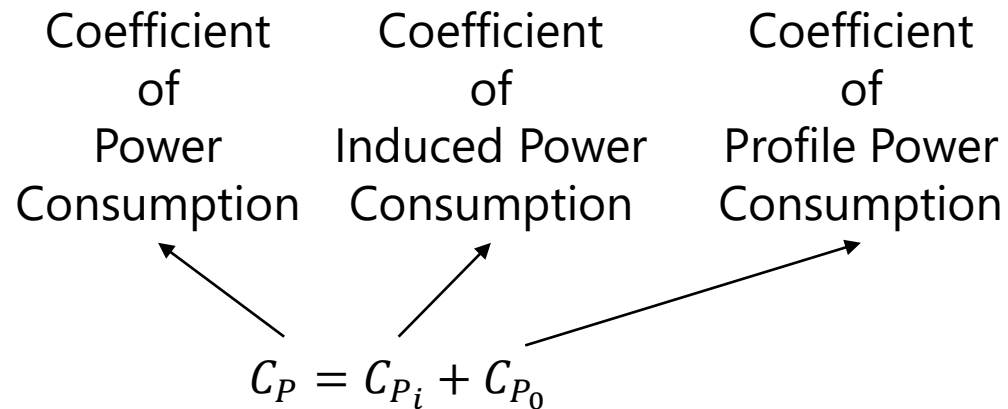


MOMENTUM THEORY

DIMENSIONLESS PARAMETERS

$$C_P = C_{P_i} + C_{P_0} = \frac{K C_T^{\frac{3}{2}}}{\sqrt{2}} + \frac{1}{8} \sigma C_{d_0}$$

For Basic Theory do not count on $\frac{1}{8} \sigma C_{d_0}$

$$C_P = C_{P_i} + C_{P_0} = \frac{K C_T^{\frac{3}{2}}}{\sqrt{2}} + \frac{1}{8} \sigma C_{d_0}$$

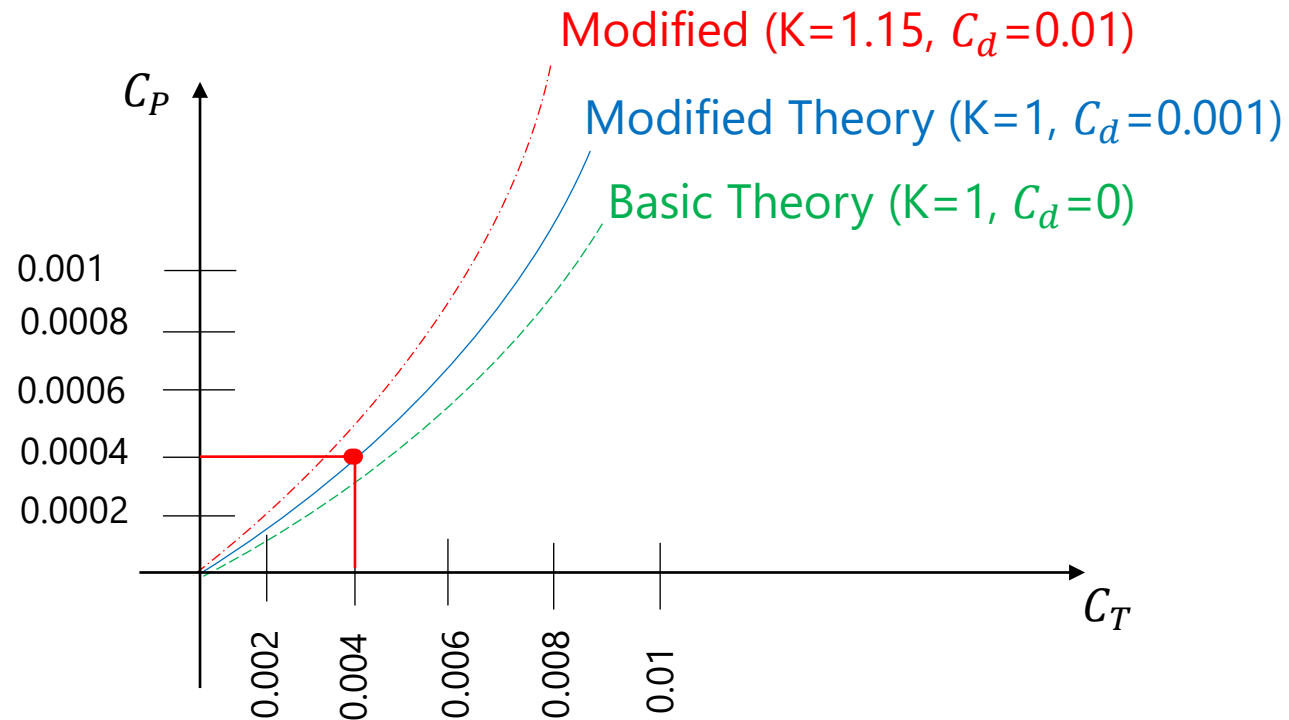


CONTENT

Title 1	—	01
Title 2	—	02
Title 3	—	03
Title 4	—	04
BLADE ELEMENT THEORY	—	05
Title 6	—	06

BLADE ELEMENT THEORY

TIP-LOSS FACTOR, B

• Tip-Loss Factor, B

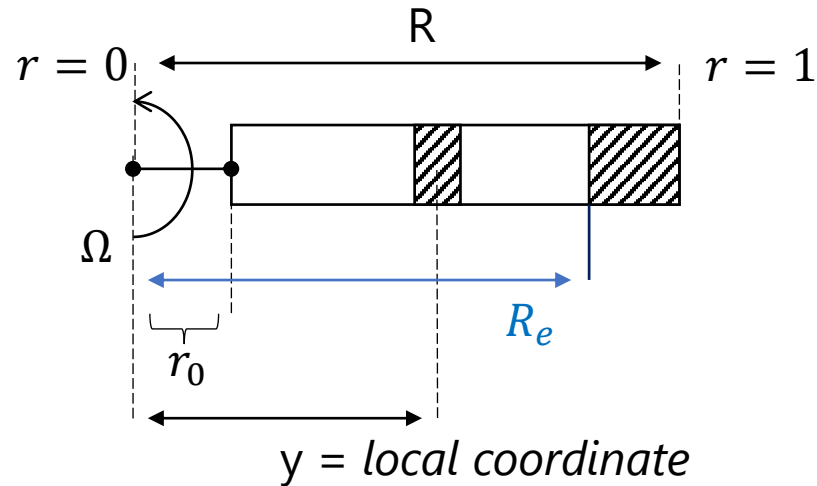


$r = \frac{y}{R}$: dimensionless coordinate

$$R_e = \textcircled{B} R$$

R : Length of Rotor Blade

R_e : Length of Effective Rotor Blade

$$A_e = \pi R_e^2 = \pi R^2 B^2 = B^2 A$$

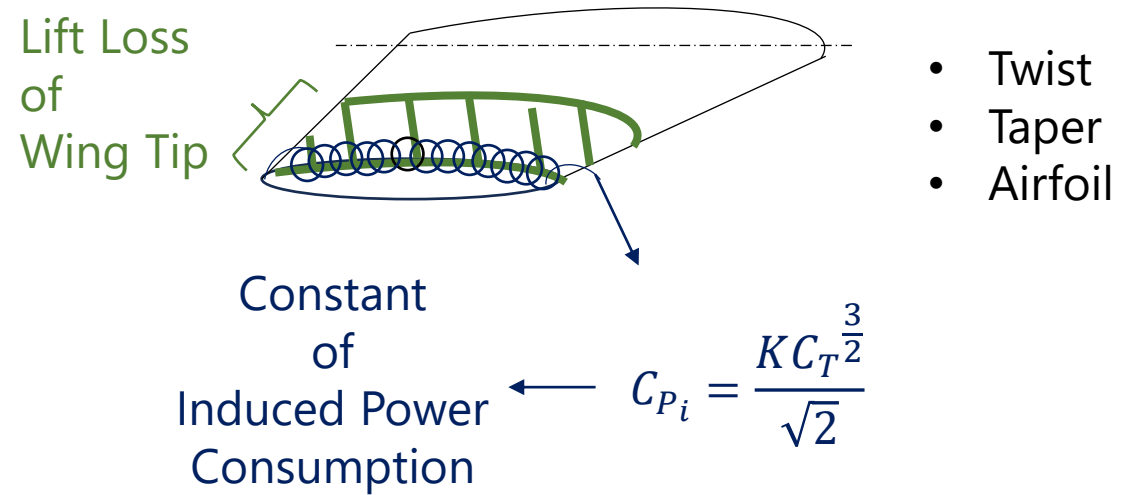

The longer B is, the more R_e increases.


The surface area of the rotor blade is increasing.

BLADE ELEMENT THEORY

TIP-LOSS FACTOR, B

The Thrust Coefficient is inversely proportional to the Tip-Loss Factor.

Tip-Loss Factor) B

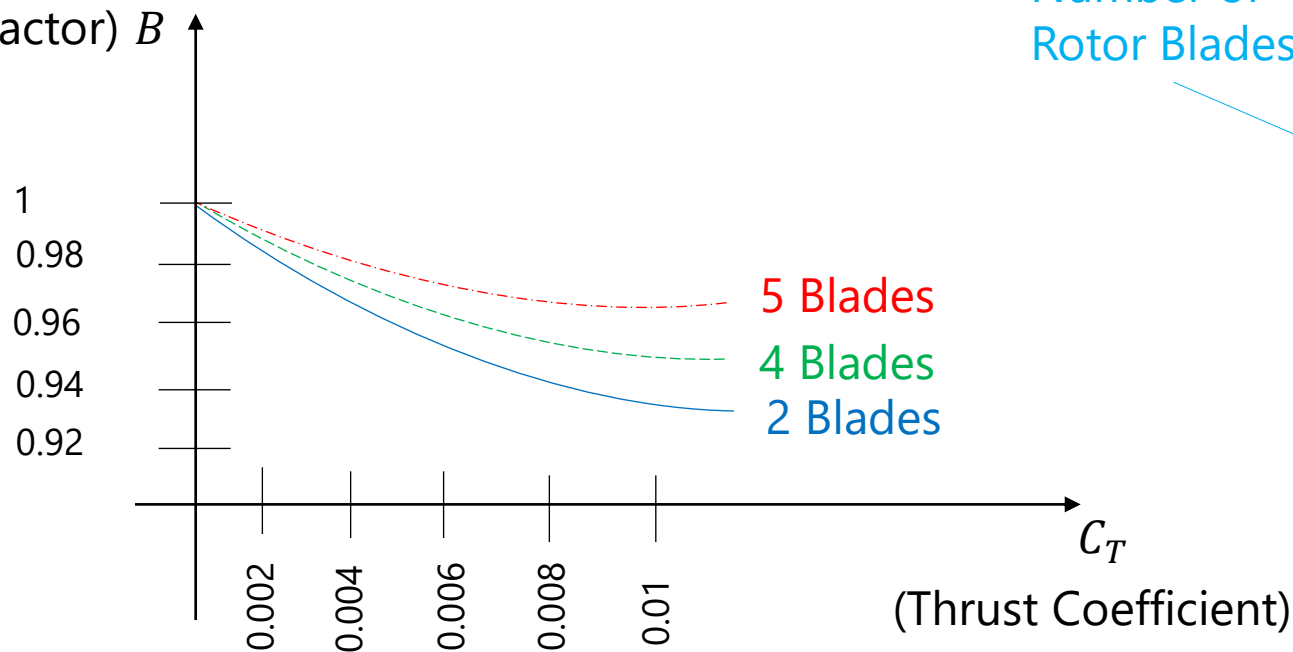

Number of Rotor Blades N_b ↑
Coefficient of Thrust C_T ↑
Thrust T ↑

Tip Loss Factor B ↓
Length of Effective Rotor Blade R_e ↓


- As the pressure difference on the upper surface of the rotor blade increases, tip losses also increase.
- Thrust production per rotor blade decreases and tip losses are reduced.

BLADE ELEMENT THEORY

DISTRIBUTION of TWIST

- Ideal Rotor

- Twist Distribution
- Uniform ϑ_i Distribution
- Min P_i Demand





$$\sigma(r) = \frac{N_b C(r)}{\pi R}$$

solidity

- Hover

C_{P_i} → Induced Power Coefficient


C_{P_D} → Drag Coefficient

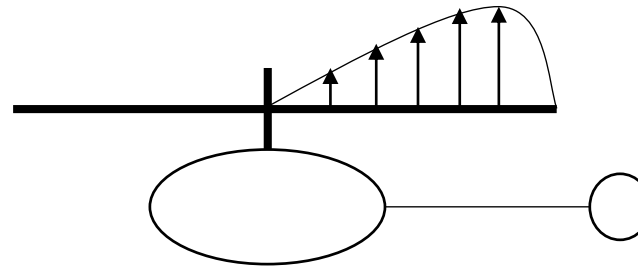

- Optimum Rotor

Torsional Distribution → Min P_i

Taper → Min P_0



$$\text{Max} \left(\frac{L}{D} \right) = \alpha$$


Lift
Drag
Angle of Attack

- It's more important to have consistency in something than perfection.

BLADE ELEMENT THEORY

DISTRIBUTION of TWIST

- Twist Angle Distribution

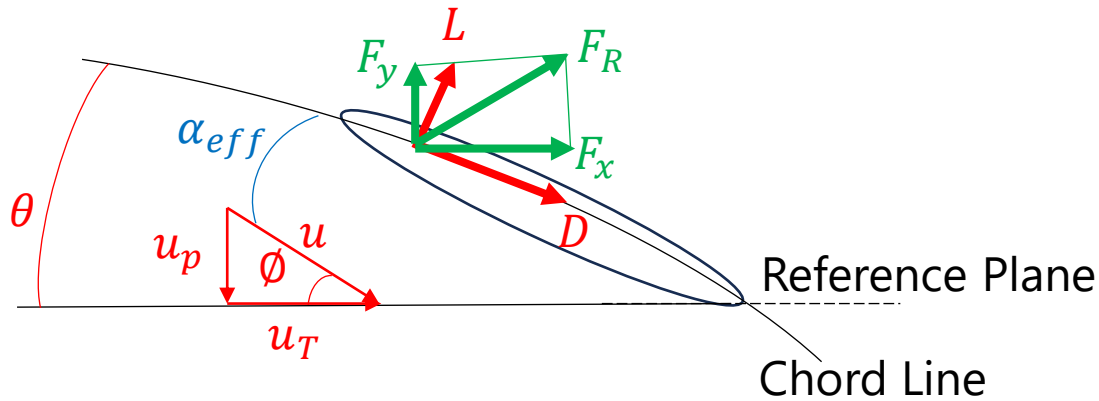


θ : Pitch Angle

ϕ : Inflow Angle


α_{eff} : Effective Angle of Attack

$$\alpha_{eff} = \theta - \phi$$

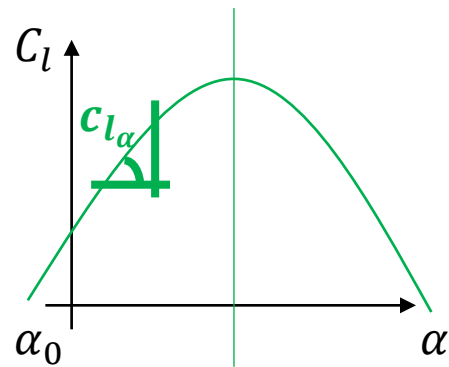

$$N_b \int dF_y = N_b F_y = T \rightarrow C_T$$

$$N_b \int y dF_x = Q \rightarrow C_Q = C_P$$

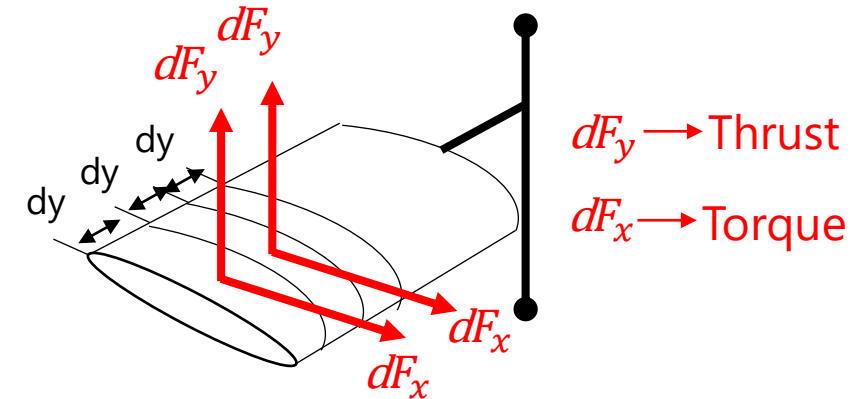

$dF_y \rightarrow$ Thrust

$dF_x \rightarrow$ Torque

$$C_P = \frac{C_T^{\frac{3}{2}}}{\sqrt{2}}$$

ϕ : Angle
 $c_{l\alpha}$: Profile
 c : chord

BLADE ELEMENT THEORY

ANGLE DISTRIBUTION


1. **Constant θ** \longrightarrow There is no twist (untwisted blade)

2. **Ideal Twist** \longrightarrow There is no twist


Thrust
Production λ_i

$$\theta = \theta_0 = \frac{6C_T}{\sigma C_{l_\alpha}} + \frac{3}{2} \sqrt{\frac{C_T}{2}} \rightarrow \text{To cover losses arising from } \phi$$


An ideal twist yields an ideal rotor.

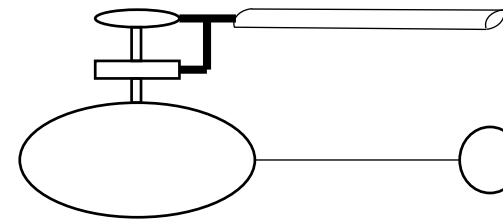

$\theta = \frac{\theta_{tip}}{r}$ Hyperbolic
 $\lambda = \lambda_0 = \text{constant}$
Uniform Flow




$$\frac{\vartheta_i}{\pi R} = \lambda_i = \text{constant} = \min. P$$




BLADE ELEMENT THEORY

ANGLE DISTRIBUTION


3. Linear Twist

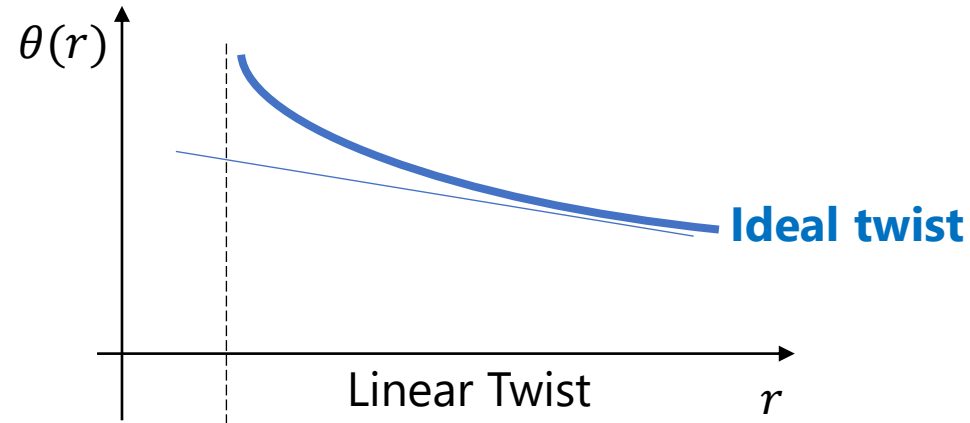

$$\theta(r) = \theta_0 + r \theta_{tw}$$

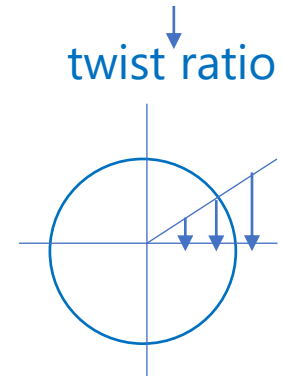

- In the rotor blade root (root region), a higher angle of attack and thicker profiles are used for load bearing.

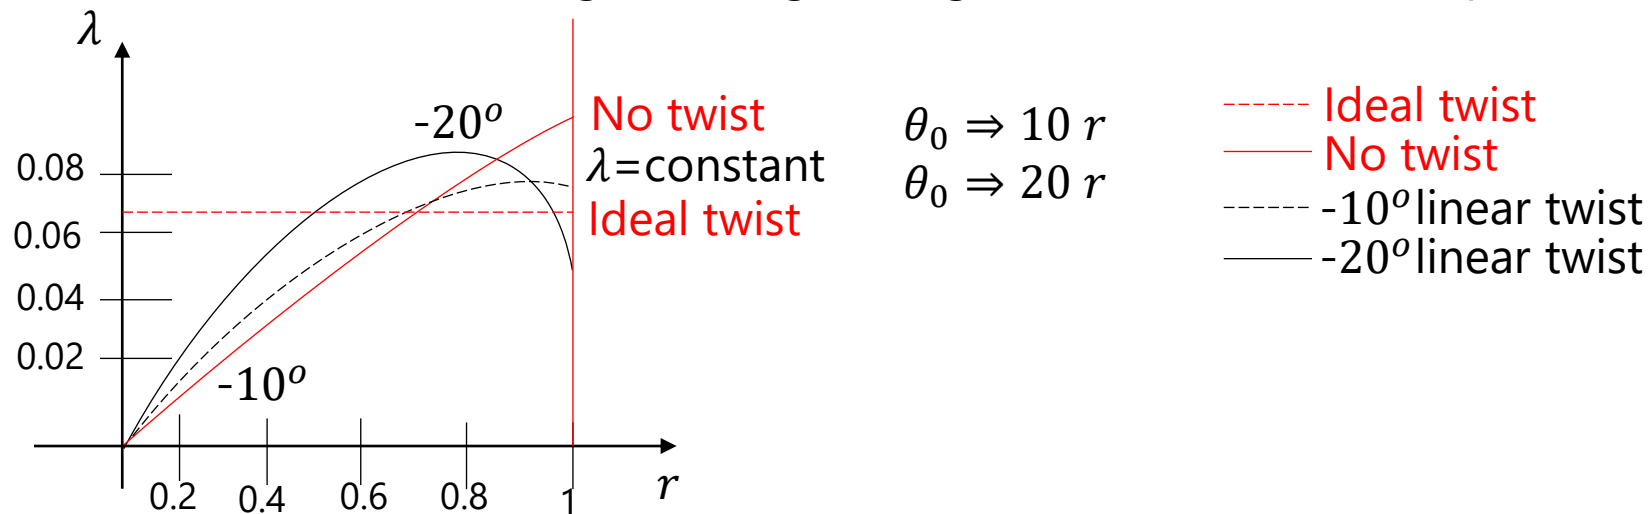

CONTENT

Title 1 — 01

Title 2 — 02

Title 3 — 03

Title 4 — 04

Title 5 — 05


PERFORMANCE CALCULATIONS — 06

PERFORMANCE CALCULATION

STANDARD CONDITIONS (AT SEA LEVEL)

- Standard Conditions (at Sea Level):

- Weather Temperature 15 °C (59 °F)
- Pressure: 101,325 kPa
- Standard air density at sea level: $\rho_0 = 1,225 \text{ kg/m}^3$
- Altitude: 6000 m = 6 km

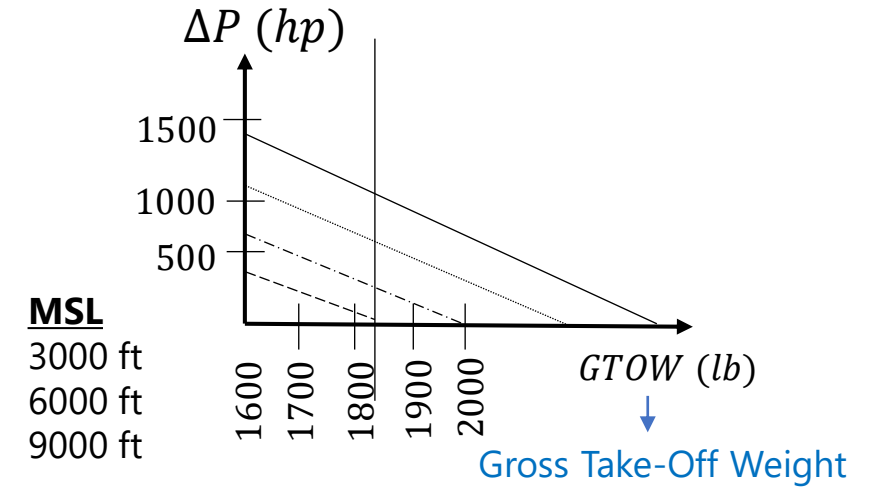

$\frac{\rho}{\rho_0} = e^{\left(-\frac{0,0296 h}{304,8}\right)}, \quad C_T = \frac{T}{\rho A v^2}, \quad h \uparrow \quad \rho \downarrow$ More P_i is required for thrust production.
It decreases from the engine.

$$P_{air} - P_1 = \text{Excess Power}$$

$$P_{excess} = \Delta P \downarrow$$



PERFORMANCE CALCULATION

STANDARD CONDITIONS (AT SEA LEVEL)

- $GTOW = T$
- Main Rotor = Single Rotor = T
- $Rotor Thrust = \frac{T}{Number\ of\ Rotor\ Blades}$ (Multi-Rotor)

$$T \rightarrow C_T$$

$$C_{P_i} \rightarrow \frac{KC_T^{\frac{3}{2}}}{\sqrt{2}} \quad K = 1,15 \sim 1,25$$

$$C_{P_0} \rightarrow \frac{1}{8} \sigma C_{d_0}$$


↓

Solidity: $\sigma = \frac{N_b r}{\pi R}$

$$C_{P_0} + C_{P_i} = C_{P_{total}} \rightarrow C_Q \rightarrow Q$$

↓

torque

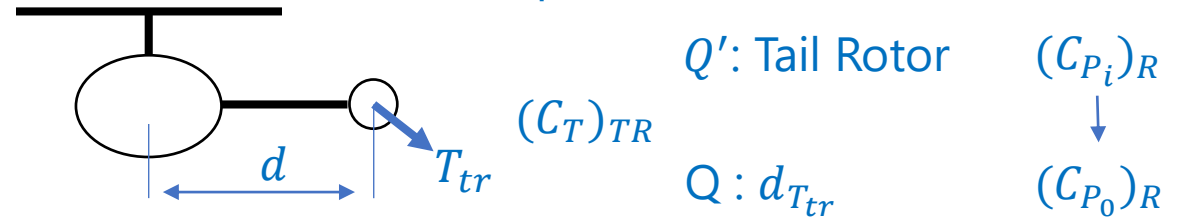

- Disk Loading refers to the torque produced per unit area.

PERFORMANCE CALCULATION

CASE STUDY

TEKNOFEST APPLICATION

In accordance with the **TEKNOFEST Rotorcraft Competition Guidelines**, a comprehensive study will be conducted covering aspects such as **market analysis**, **mission profile definition**, and related design considerations. While the mission profile specified in the guidelines corresponds to a **10-hour operational duration**, a **shorter mission profile of approximately 2–3 hours** may be adopted within the scope of this study, depending on system-level trade-offs and design objectives.

Regarding the air vehicle configuration, the guidelines recommend the design of a **tail-rotor-equipped rotorcraft incorporating an anti-torque system**, and therefore, a **conventional tail-rotor helicopter configuration** will be considered as the baseline platform for the proposed design.


PERFORMANCE CALCULATION

CASE STUDY

STEPS:

1. Helicopter Design
 2. TEKNOFEST Helicopter Selection
 3. Marketing Analysis
 4. Air Vehicles → Sciencedirect
Theses →
 - PhD
 - MSc
 - Lisence Final Project
- Maximum Flight Speed
 - Flight Duration
 - Climb / Descent Rate
 - Hover Duration

$$\frac{T}{P} = PL (HOVER OFF)$$

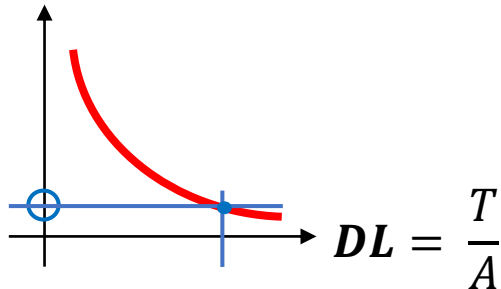

ENGINE POWER



PERFORMANCE CALCULATION


DESIGN PARAMETERS

DESIGN PARAMETERS

1. Gross Take-Off Weight (GTOW)


→ If the Take-off Weight is present in the Requirements

Installed Power-Up → First Impression

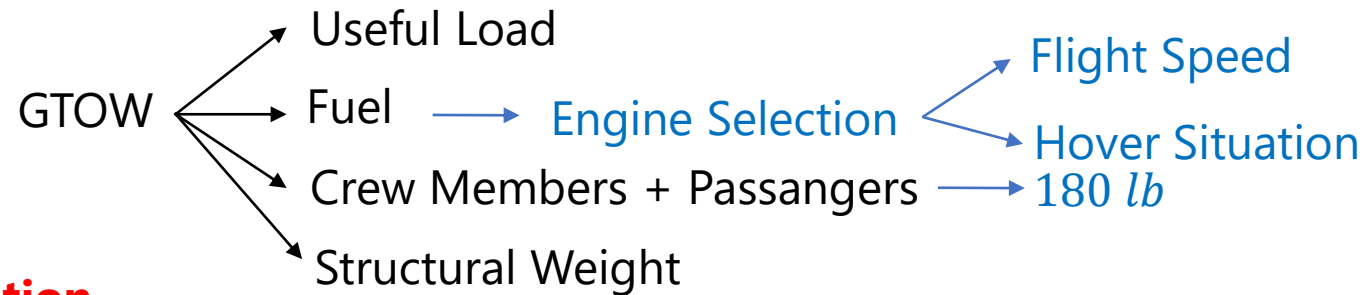

2. Fuel Consumption

Piston Engines → $0.5 \text{ lb}/\text{hp} \cdot \text{h}$ (SFC)
Turbine Engines → $0.4 \text{ lb}/\text{hp} \cdot \text{h}$ (SFC)

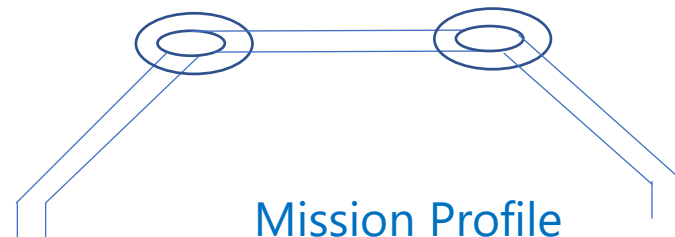

$$\text{Fuel} = \text{SFC} \times \text{hp} \times \text{hr}$$


Horse Power Mission Duration

Specific Fuel Consumption:
Fuel Flow per hp.hr

PERFORMANCE CALCULATION

DESIGN PARAMETERS


3. Useful Load (UL)

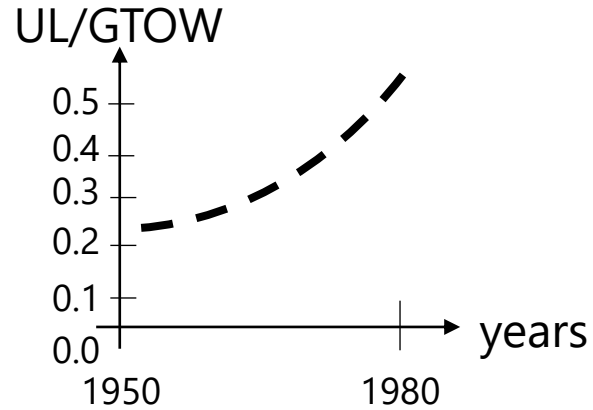

$$UL = GTOW \times \frac{UL}{GTOW}$$

$$GTOW = \frac{UL}{\frac{UL}{GTOW}}$$

4. Disk Loading (DL)

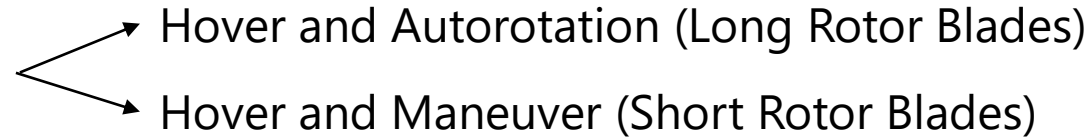


$$DL = \frac{T}{A} \left\{ \begin{array}{l} \text{Single Engine} \longrightarrow 2500 \text{ ft/min} \\ \text{Double/Multi Engines} \longrightarrow 3500 \text{ ft/min} \end{array} \right\} \text{ Autorotation} \leftarrow \text{Energy}$$

PERFORMANCE CALCULATION


DESIGN PARAMETERS

Rotor Blade Turning Velocity: Advancing Ratio

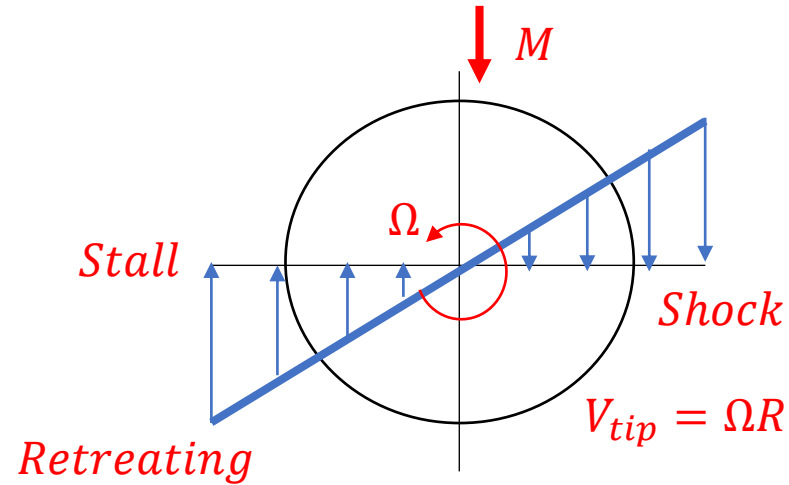

$0.92 M \rightarrow$ MACH TUCK value

It would be better not to exceed 0.6 M.

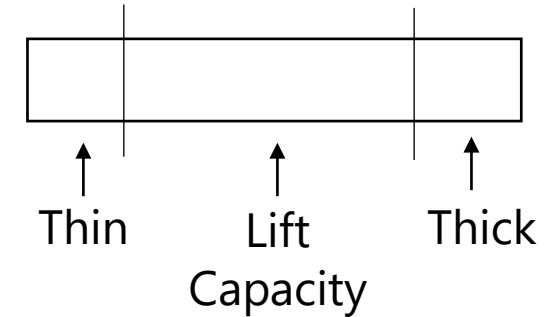


PERFORMANCE CALCULATION

DESIGN PARAMETERS

5. Rotor Blade Velocity (V_{tip})

Low Tip Speed → Low noise, higher hover performance

High Tip Speed → High energy storage

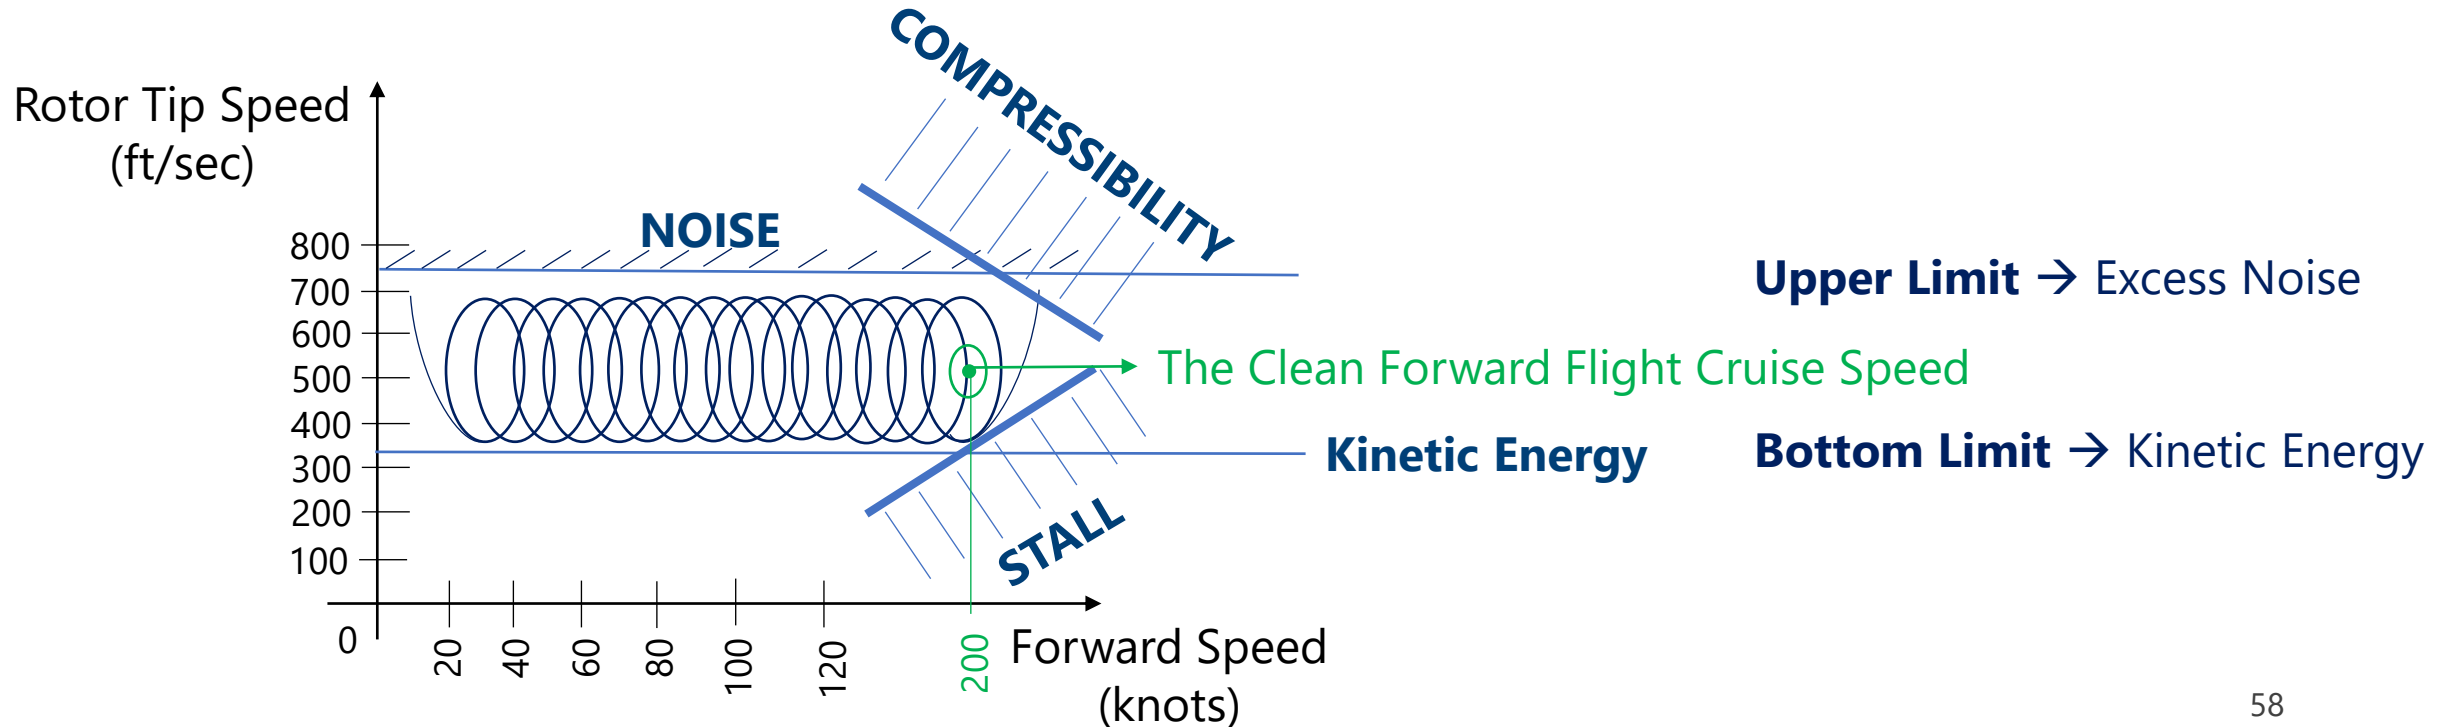

PERFORMANCE CALCULATION

DESIGN PARAMETERS

- **The Clean Forward Flight Cruise Speed:**
- Especially the speed of 200 knots is known as a safe zone in the Forward Flight Speed.
- 30 minutes or 20 minutes can be strained up to 300 knots.
- It can be caught by changing the Rotor Blade and Taper.

SUMMARY

remote workers hit the ground running

As they transitioned to new workplaces, employees were forced to adapt to different assignments and planning, as well as following the outbreak of the coronavirus, but, productivity and fatigue satisfaction, rather equally, 22% of employees kept the same hours they had at work and 34% switched to a more flexible schedule toward remote work and were willing to continue telecommuting one or two days per week in the future, while also being open to the option of working from a coworking space.

Most employees expressed a positive attitude spread throughout the day, and early afternoon (8:00-4:00 PM) stated that they worked in the morning and early afternoon (8:00-4:00 PM) and 34% switched to a more flexible schedule toward remote work and were willing to continue telecommuting one or two days per week in the future, while also being open to the option of working from a coworking space.

When analyzing the results of various surveys, it must be mindful of the fact that the pandemic has changed the way we work. The results of the survey show that 520,000 (46%) of all workers were working from home because of the situation surrounding the pandemic.²⁸ The results of the survey show that 520,000 (46%) of all workers were working from home because of the situation surrounding the pandemic.²⁸ The results of the survey show that 520,000 (46%) of all workers were working from home because of the situation surrounding the pandemic.²⁸



SUMMARY

PUNCHPOINTS

- Rotary-wing aircraft generate lift and thrust directly from the rotor, enabling hover, vertical climb, and low-speed maneuverability.
- Rotor-induced flow, wake formation, and induced velocity dominate hover and low-speed performance.
- Helicopter control is achieved via collective (lift/power), cyclic (pitch & roll), and pedals (yaw/anti-torque).
- Flight regimes (hover, axial, forward) introduce aerodynamic asymmetry, mitigated through cyclic pitch control.
- Momentum Theory estimates induced velocity and power but lacks blade-level design fidelity.
- Blade Element Theory enables rotor geometry optimization (twist, taper, airfoil, AoA).

SUMMARY

PUNCHPOINTS

- Blade Element Momentum Theory (BEMT) combines both for realistic performance analysis.
- Hover requires maximum power; forward flight benefits from translational lift and improved efficiency.
- Hover ceiling is lower than power ceiling; helicopters lose hover capability before forward flight capability.
- Key design drivers include disk loading, tip Mach number (<0.6), power margins, vibration, and noise.
- TEKNOFEST case study adopts a conventional tail-rotor helicopter with a 2–3 hour mission profile, balancing performance, efficiency, and design feasibility.

ANY QUESTION?



Training Evaluation Form





THANK YOU

