

Recover Mission Simulation Report

Route: EGPF EGHH | Distance: 319.3 NM | Bearing: 162.0
Generated: 2026-04-29 23:31

Airports

Type	Airport	ICAO	PA (ft)	DA (ft)
Departure	Glasgow Arpt	EGPF	26	26
Arrival	Bournemouth Arpt	EGHH	38	38


Route Distance: 319.3 NM | Bearing: 162.0°

Climb Speed Schedule

Configuration	Best Rate Climb	Cruise Climb
Tamarack M2	103-200 KIAS / M 0.16-0.51	103-200 KIAS / M 0.16-0.51 (actual) cfg 180

Flight Route Map

- Destination: 319.3 NM
- Route
- Waypoints
- Departure
- Destination
- To Alternate (21 NM)
- ★ Alternate (EGHI)

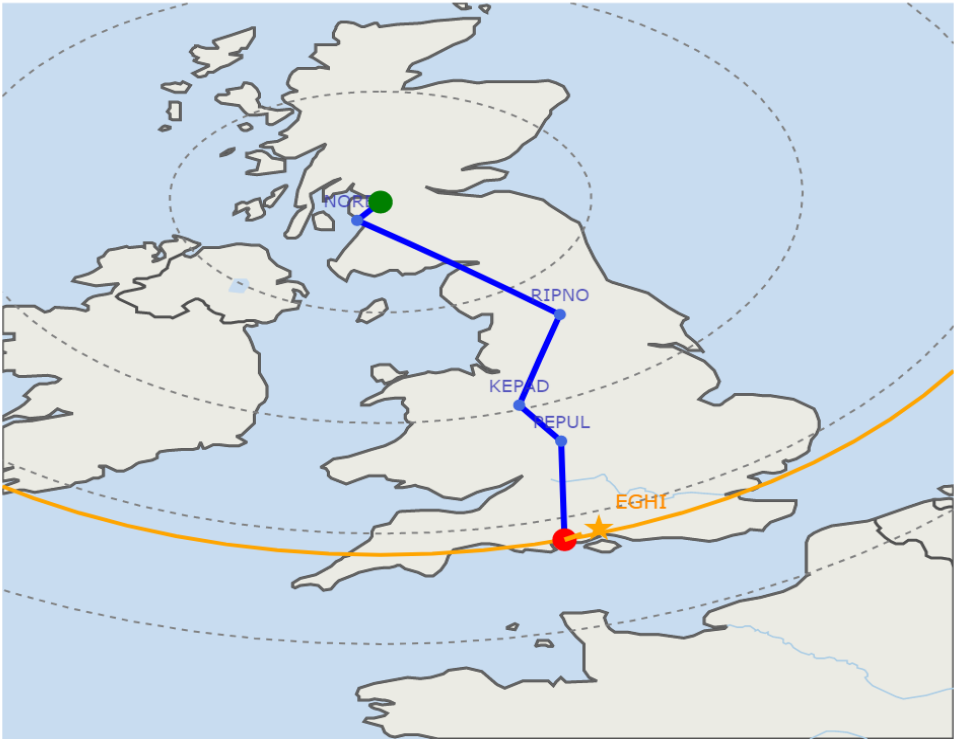

Weight Status

Weight Status

Component	Weight (lb)	Max Weight (lb)
BOW	7,391	7,391
Payload	1,350	1,409
Initial Fuel	2,059	3,440
Reserve Fuel	900	600
Taxi Fuel	100	100
Mission Fuel	1,059	1,059
ZFW	8,741	8,800
Ramp Weight	10,800	10,800
Takeoff Weight	10,700	10,700

Tamarack

Takeoff

Climb

Cruise

Descent

Landing

Totals

Flatwing

Takeoff

Takeoff Start Weight (lb): 10281

Takeoff End Weight (lb): 10270

Takeoff Roll Dist (ft): 1021

Dist to 35 ft (ft): 1231

Segment 1 Gradient (%): 32.02

Dist to 400 ft (ft): 3264

Segment 2 Gradient (%): 31.58

Dist to 1500 ft (ft): 9897

Segment 3 Gradient (%): 29.06

Fuel Remaining After Takeoff (lb): 1948

Takeoff V-Speeds:

Weight: 10271

VR: 90.1

V1: 90.1

V2: 102.9

V3: 111.5

Climb

Climb Time (min): 20

Climb Dist (NM): 91

Climb Fuel (lb): 501

Climb Knee Alt (ft): 27178

Fuel Remaining After Climb (lb): 1466

Cruise

Cruise Time (min): 14

Cruise Dist (NM): 101

Cruise Fuel (lb): 231

Cruise VKTAS (knots): 373

Cruise Max Mach: 0.703

Time to Target Mach (min): 3.7

Cruise - First Level-Off Alt (ft): 33000

Fuel Remaining After Cruise (lb): 1725

Descent

Descent Time (min): 27

Descent Dist (NM): 125

Descent Fuel (lb): 146

Descent Knee Alt (ft): 30494

Fuel Remaining After Descent (lb): 1819

Landing

Landing Start Weight (lb): 9406

Landing End Weight (lb): 9399

Landing - Dist from 35 ft to Stop (ft): 1218

Landing - Ground Roll (ft): 749

Fuel Remaining After Landing (lb): 1077

Approach V-Speeds:

Weight: 9400

VAPP: 117.0

VREF: 91.0

Totals

Total Time (min): 62
Simulation Runtime (s): 1.238
Total Dist (NM): 318
Total Fuel Burned (lb): 881
Fuel Remaining (lb): 1077
Integration Steps: 3793
30s Step Count: 19
V1 Cut: False

Hourly Fuel Burn (lb)

Hour	Tamarack (lb)	Flatwing (lb)
1		501/372/873
2		7

Aircraft Configuration: Tamarack M2 (M2 / Tamarack)

Airframe & Aerodynamics

Wing Area: 250.0 ft2
Span: 52.0 ft
AR: 10.82
Oswald e: 0.8025
Sweep 25%c: 0.0 deg
Cd0: 0.02722
CL0: 0.210
CLa: 4.815
CLmax Clean: 1.444
CLmax F15: 1.648
CLmax F40: 1.873

Weights

BEW: 6,972 lb
MZFW: 8,800 lb
Max Payload: 1,828 lb
MTOW: 10,700 lb
MRW: 10,800 lb
Max Fuel: 3,440 lb
Taxi Fuel: 100 lb
Reserve Fuel: 600 lb

Performance Limits

VMO: 263 KCAS
Mmo: 0.71
Ceiling: 41,000 ft
Climb KCAS/Mach: 180 / 0.51
Descent KCAS/Mach: 260 / 0.70
Min ROC: 300 ft/min

Powerplant


Engine: Williams FJ44-1AP-21
Engines: 2
SFC: 0.6000 lb/hr/lb
Thrust Mult: 0.723
Static Thrust/Eng: 1,965 lb
Total Static Thrust: 3,930 lb

FJ44-class Thrust Deck x 0.723 (lbf/engine)

Alt (ft)	M 0.01	M 0.10	M 0.15	M 0.20	M 0.25	M 0.30	M 0.35	M 0.40	M 0.45	M 0.50	M 0.55	M 0.60	M 0.65
0	2,038	1,872	1,803	1,735	1,662	1,590	1,536	1,482	1,420	1,359	1,337	1,315	1,315
5,000	1,843	1,704	1,647	1,590	1,531	1,472	1,422	1,373	1,333	1,294	1,281	1,268	1,263
10,000	1,648	1,536	1,491	1,446	1,399	1,353	1,309	1,265	1,247	1,229	1,225	1,221	1,211
15,000	1,431	1,370	1,336	1,301	1,258	1,215	1,180	1,145	1,128	1,111	1,101	1,091	1,080
20,000	1,214	1,203	1,180	1,156	1,117	1,077	1,051	1,026	1,010	994	978	961	950
25,000	1,004	996	981	967	942	916	900	885	876	867	863	860	856
30,000	795	788	783	777	766	755	750	744	743	741	750	759	762
35,000	636	636	636	636	636	636	636	636	639	643	647	650	656
40,000	491	491	491	491	491	491	491	491	491	491	498	506	513
45,000	368	368	368	368	368	368	368	368	368	368	368	368	375
50,000	216	220	223	226	231	237	239	242	242	244	242	242	250


Takeoff Performance: Brake Release to 1500 ft

Takeoff Performance: Altitude vs. Distance (Brake Release to 1500 ft)

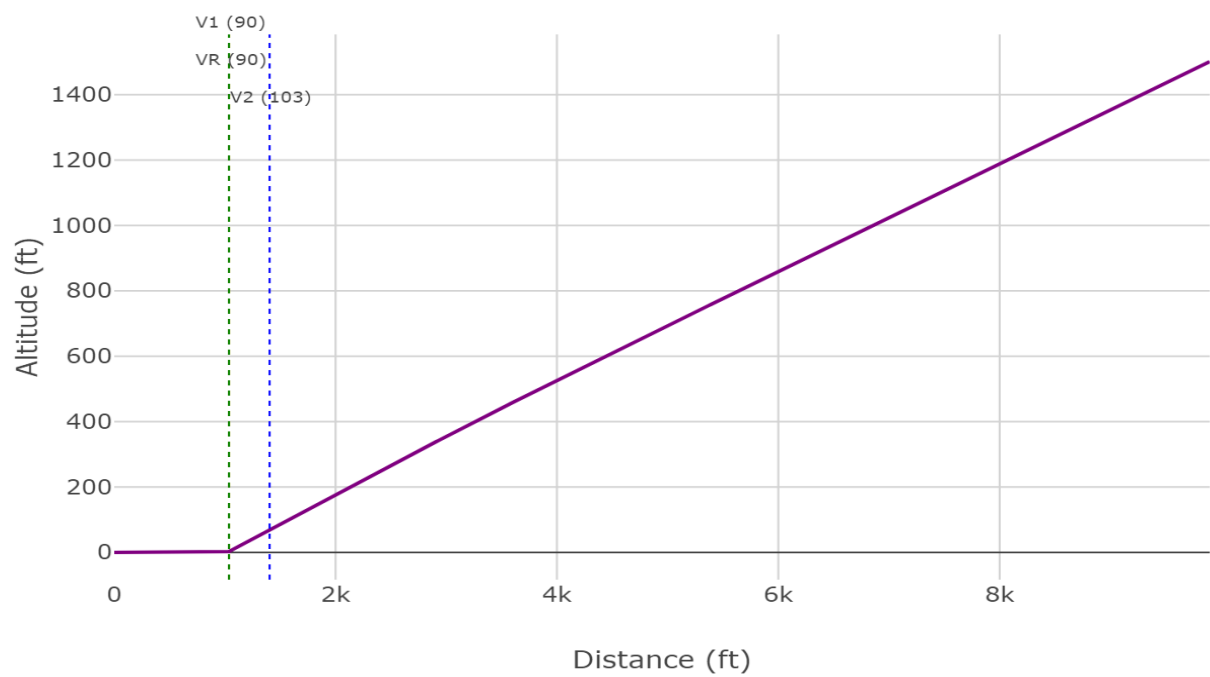


Takeoff Performance: 1500 ft to 5000 ft AGL


Takeoff Performance: Altitude vs. Distance (1500 ft to 5000 ft AGL)

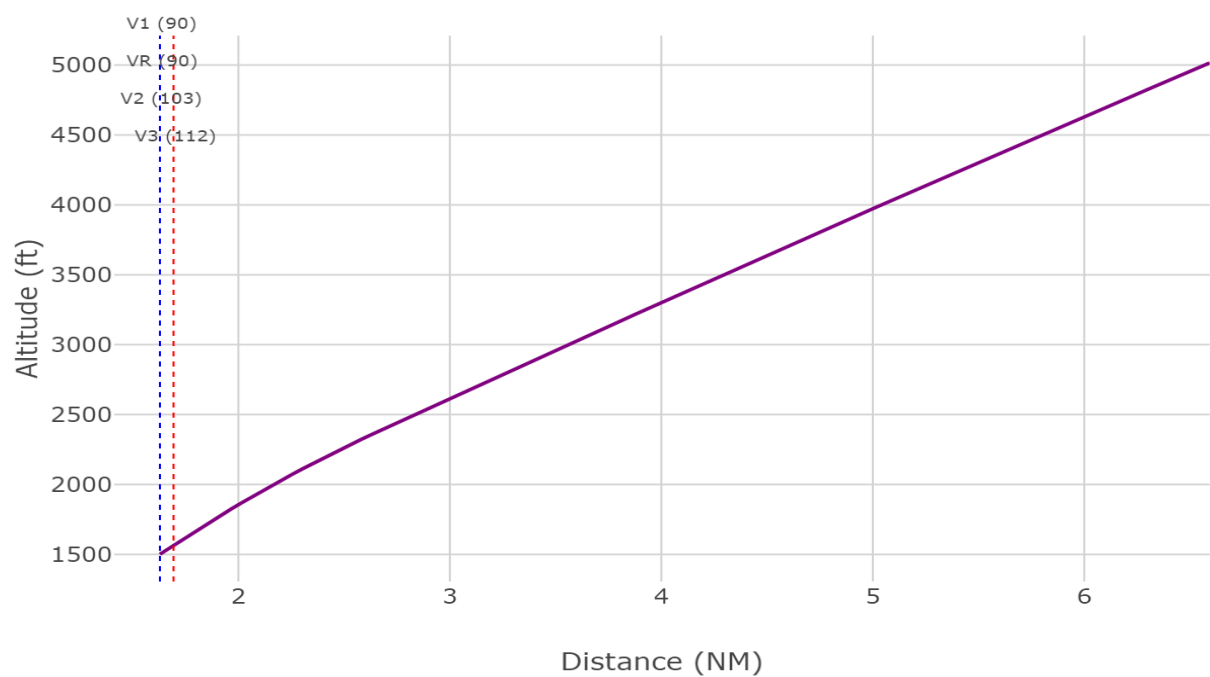


Altitude and Mach vs. Distance

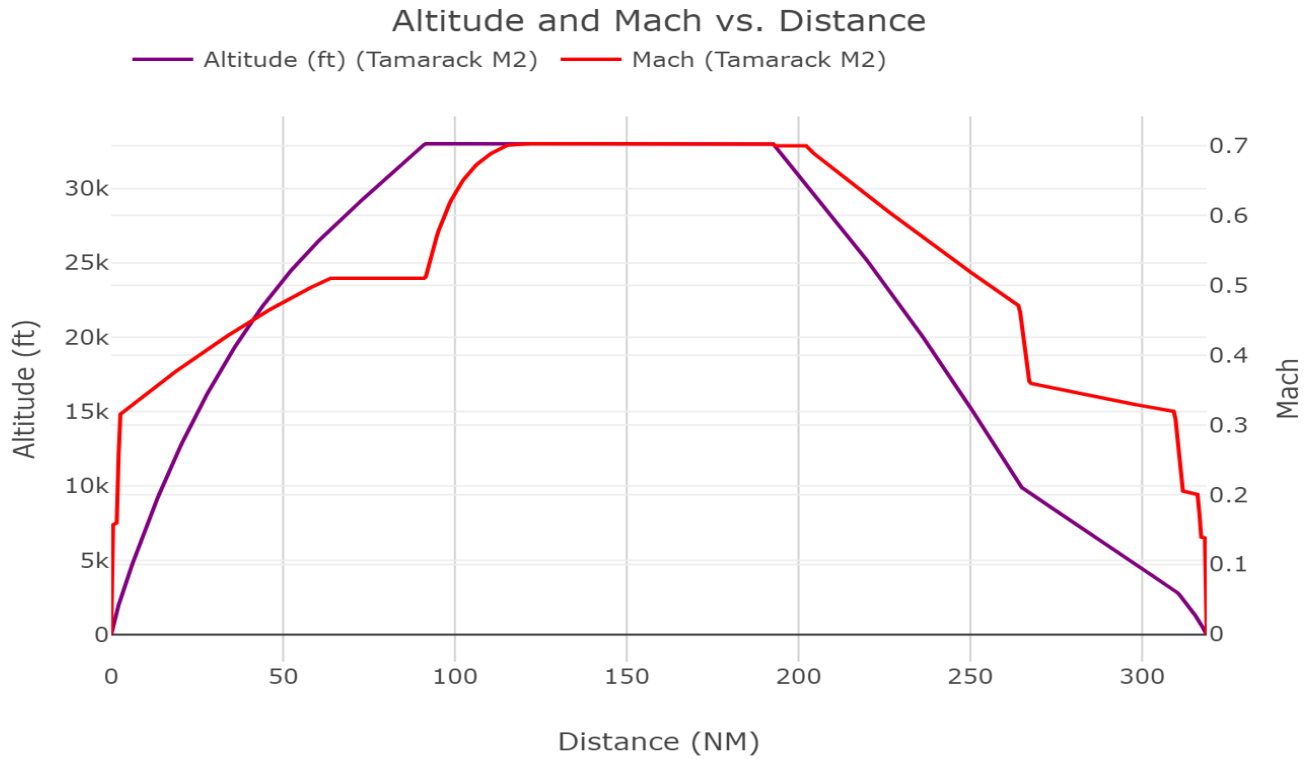


Altitude, TAS and IAS vs. Distance

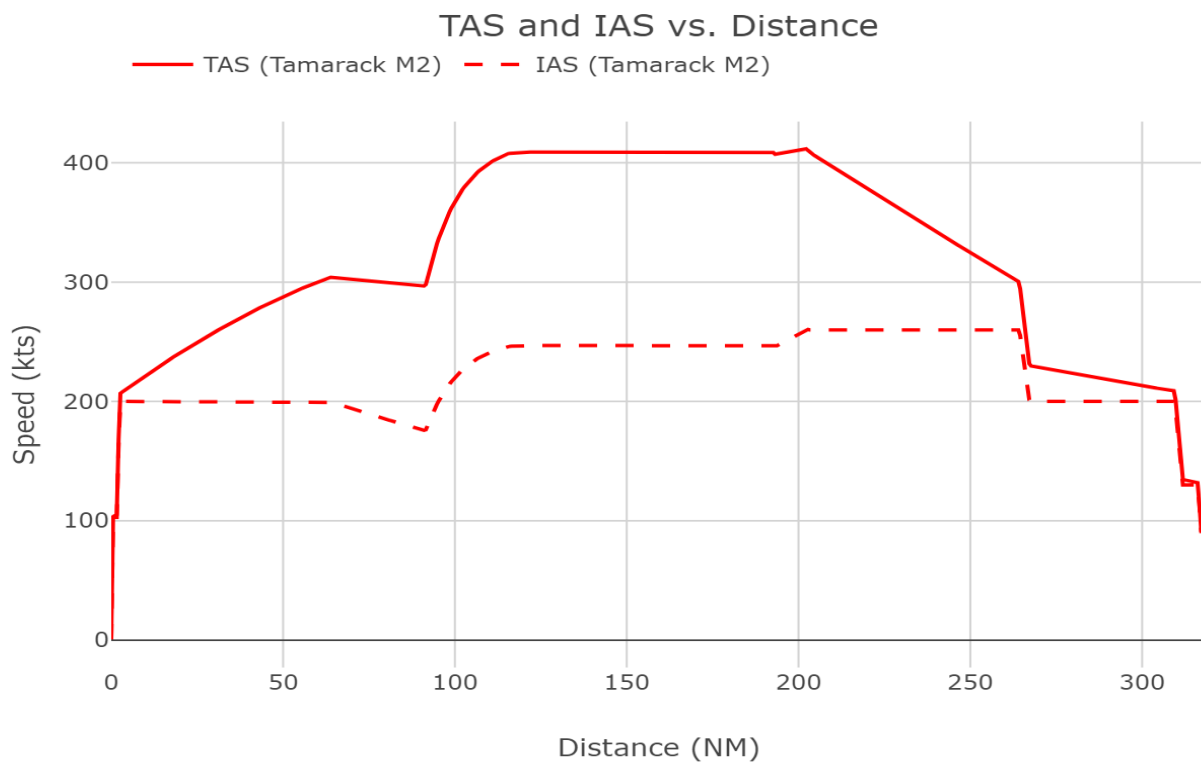


Rate of Climb vs. Distance

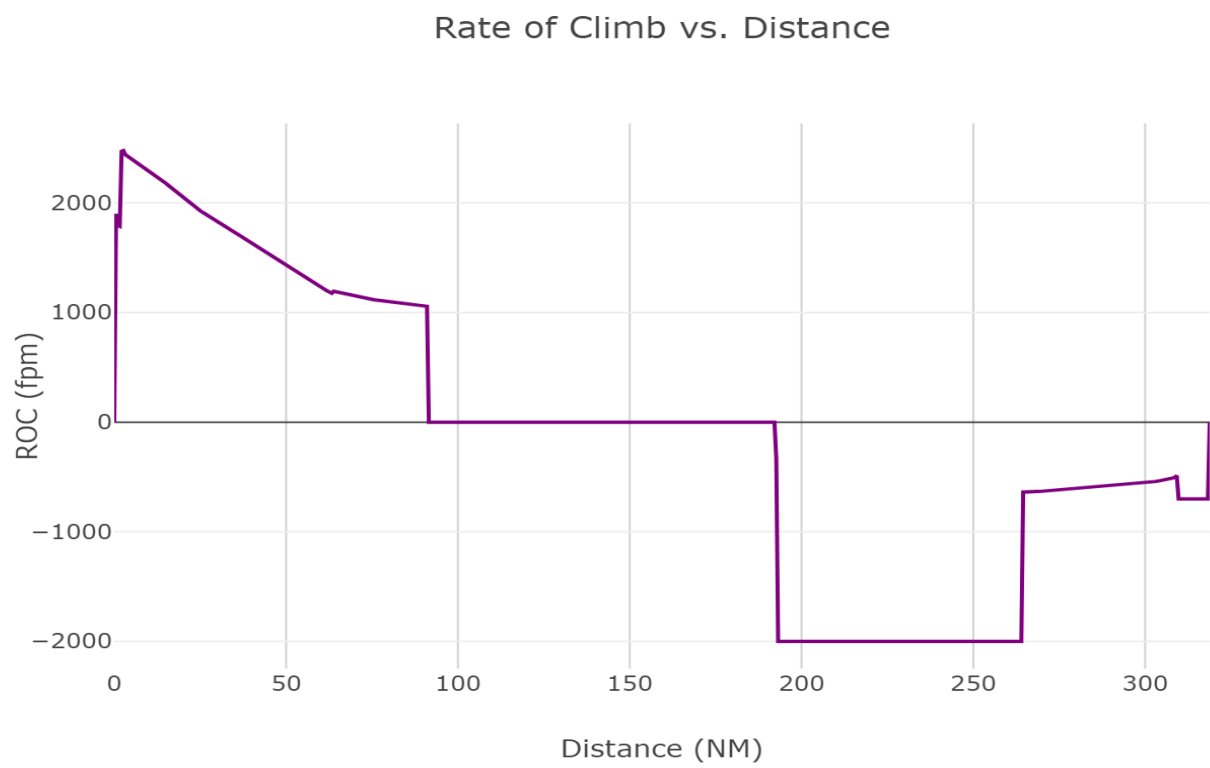


Thrust vs. Distance

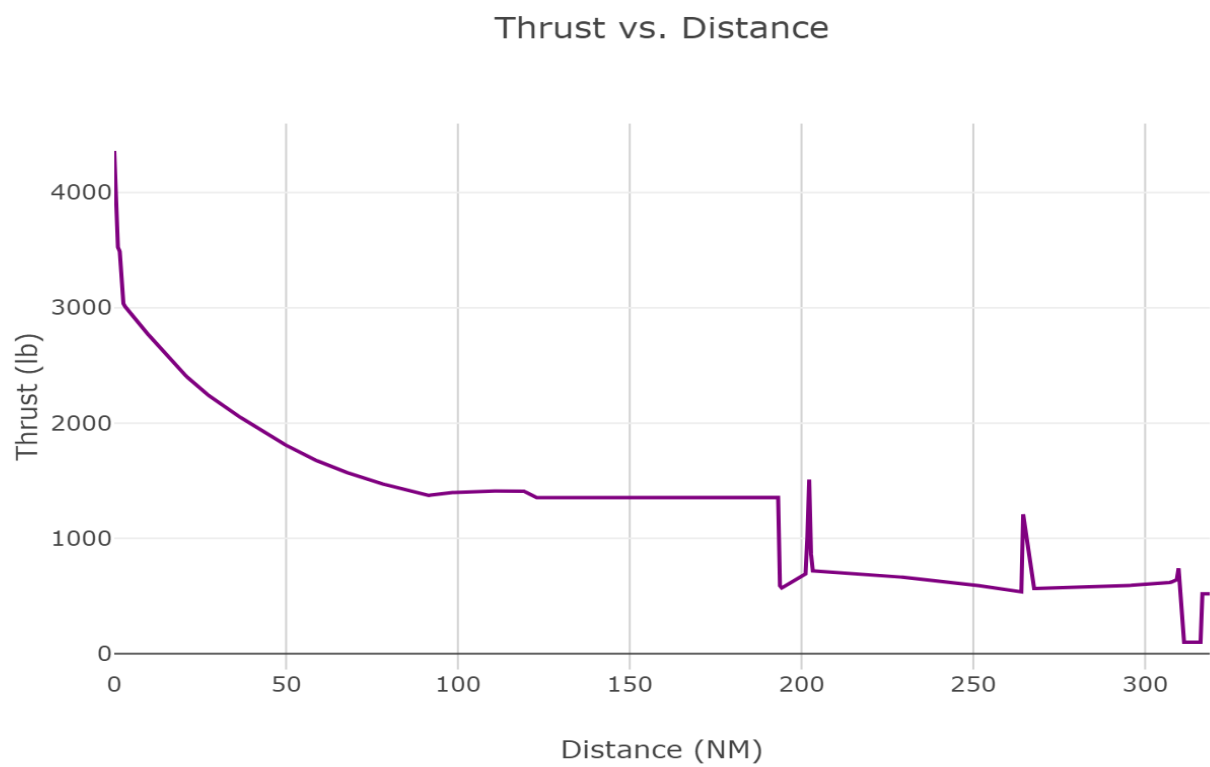


Drag vs. Distance

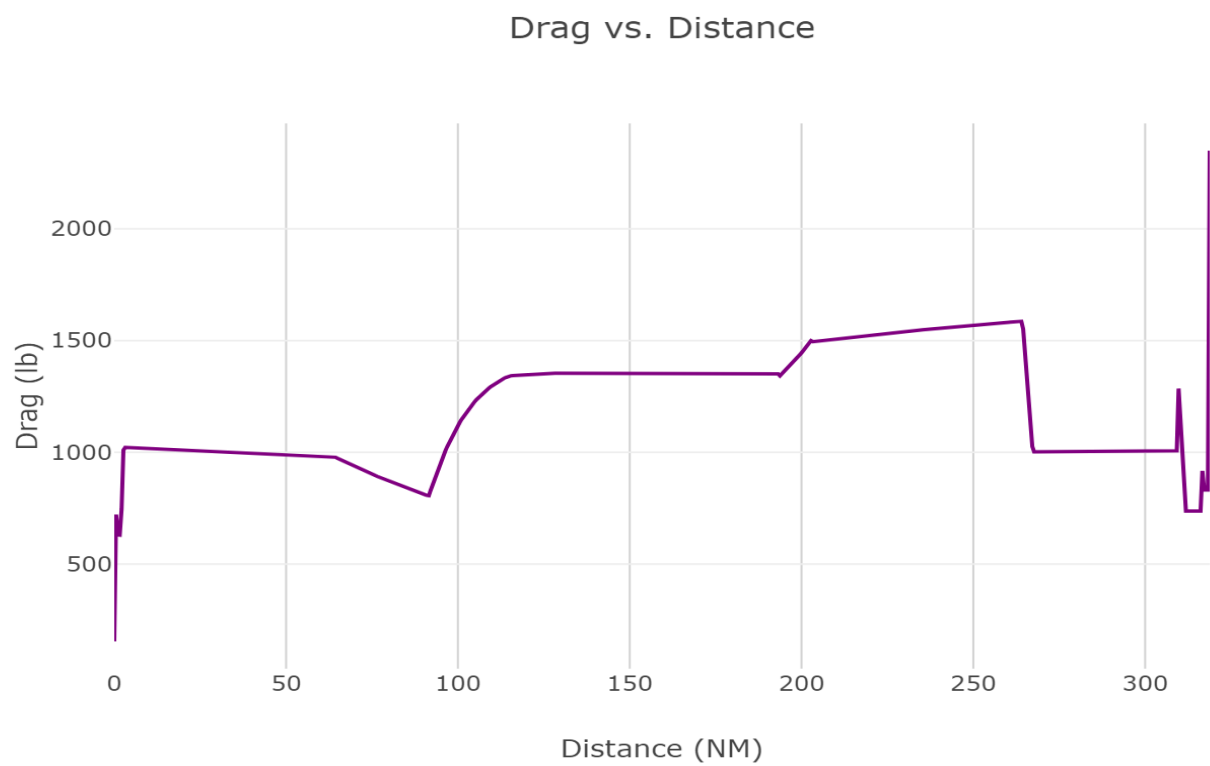


Fuel Flow vs. Distance

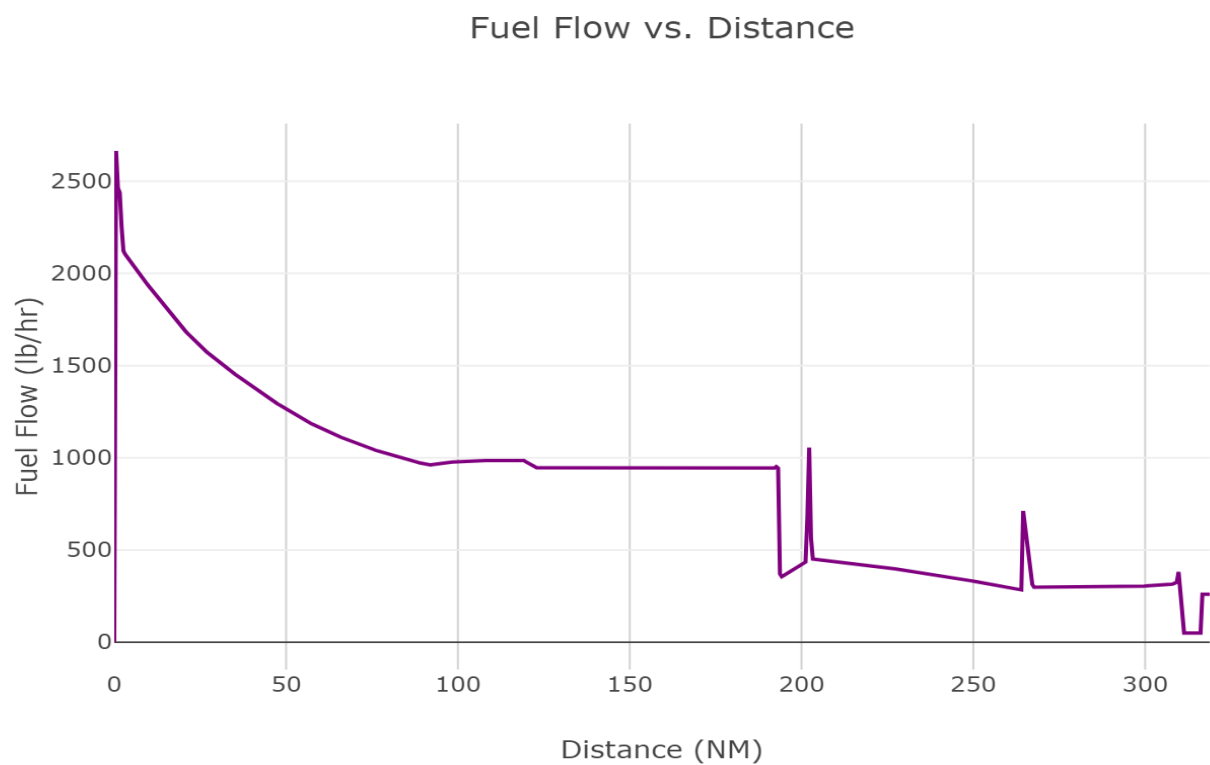


Weight vs. Distance

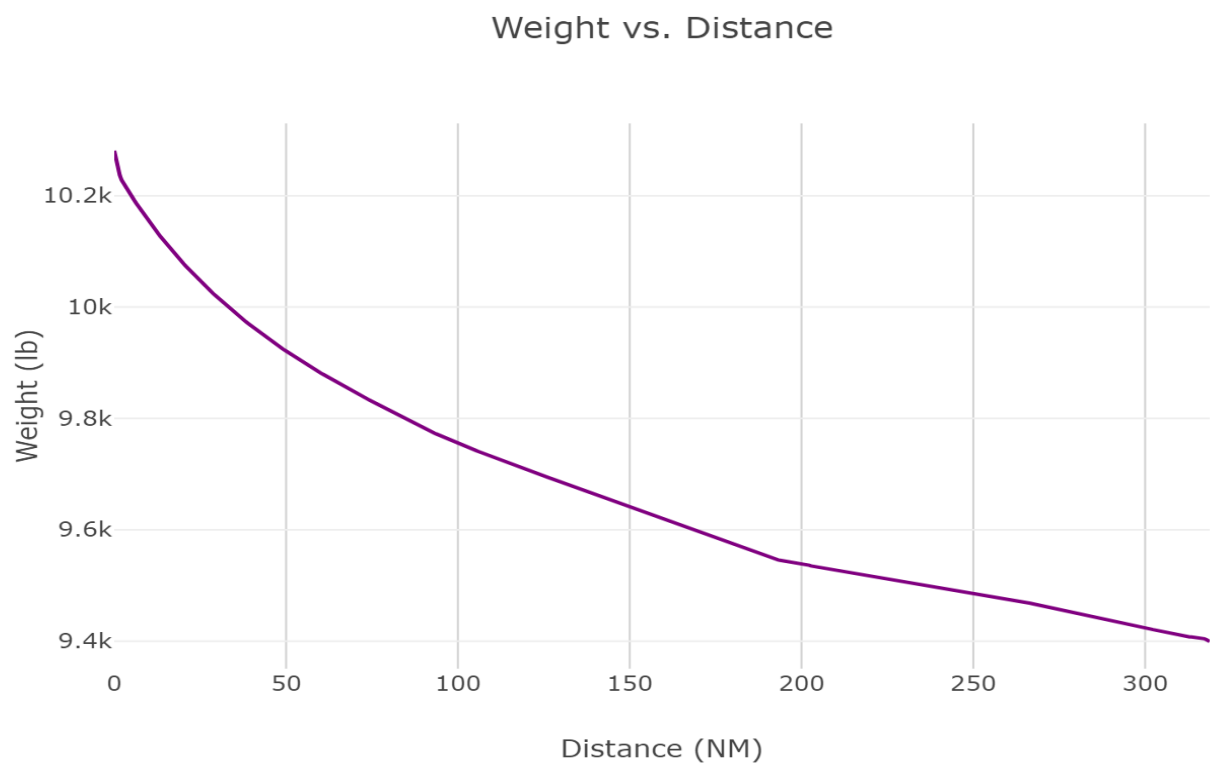


Induced Drag vs. Distance

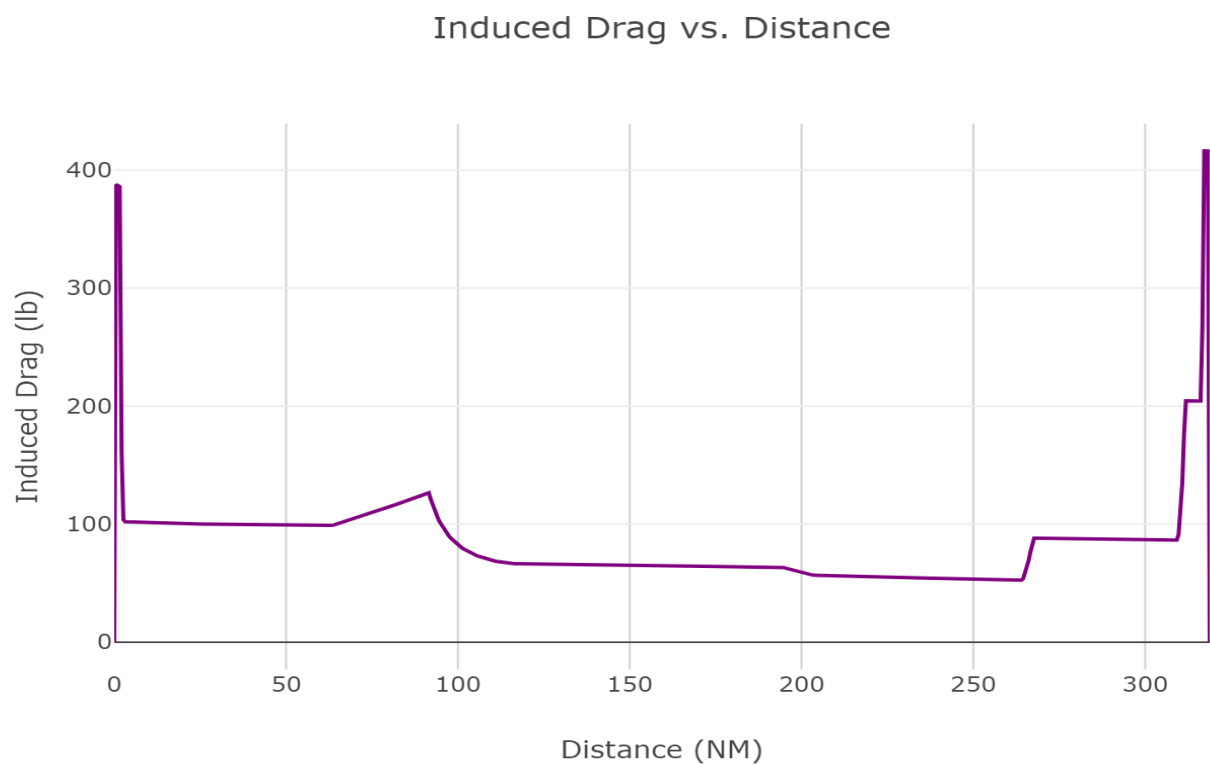

Climb Gradient vs. Distance

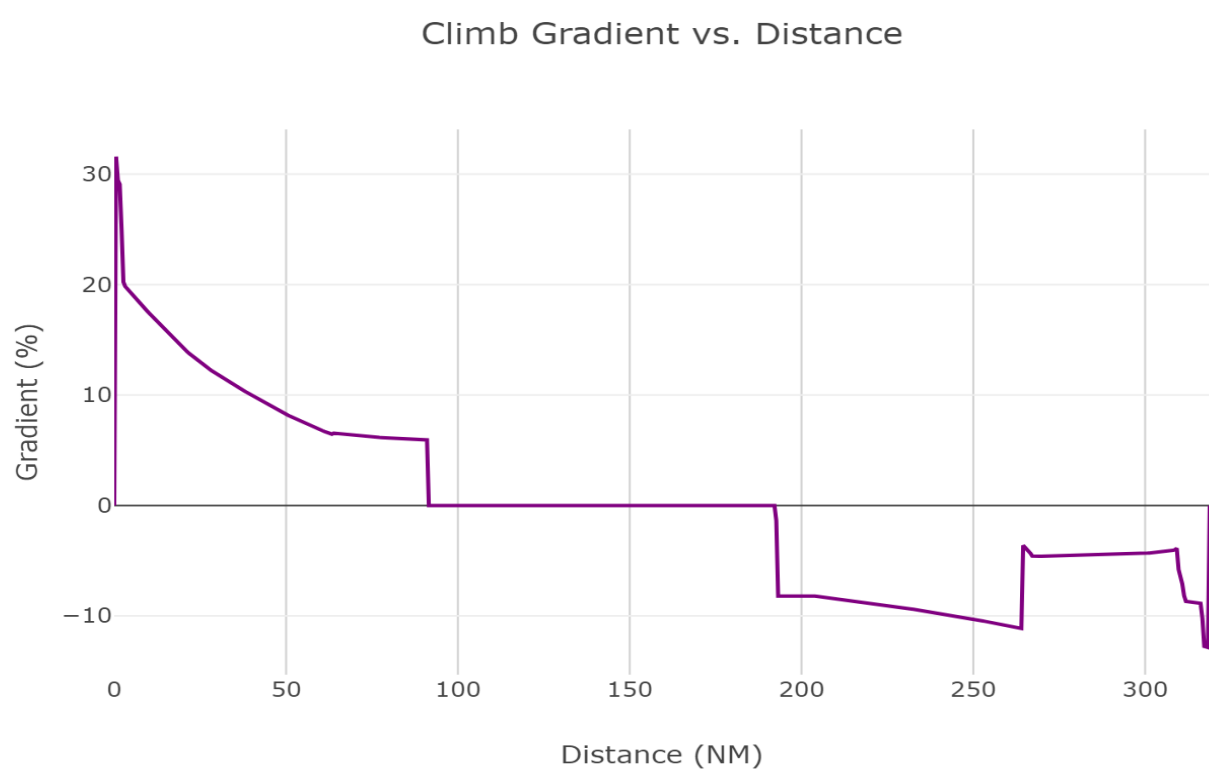

Mach vs. Distance

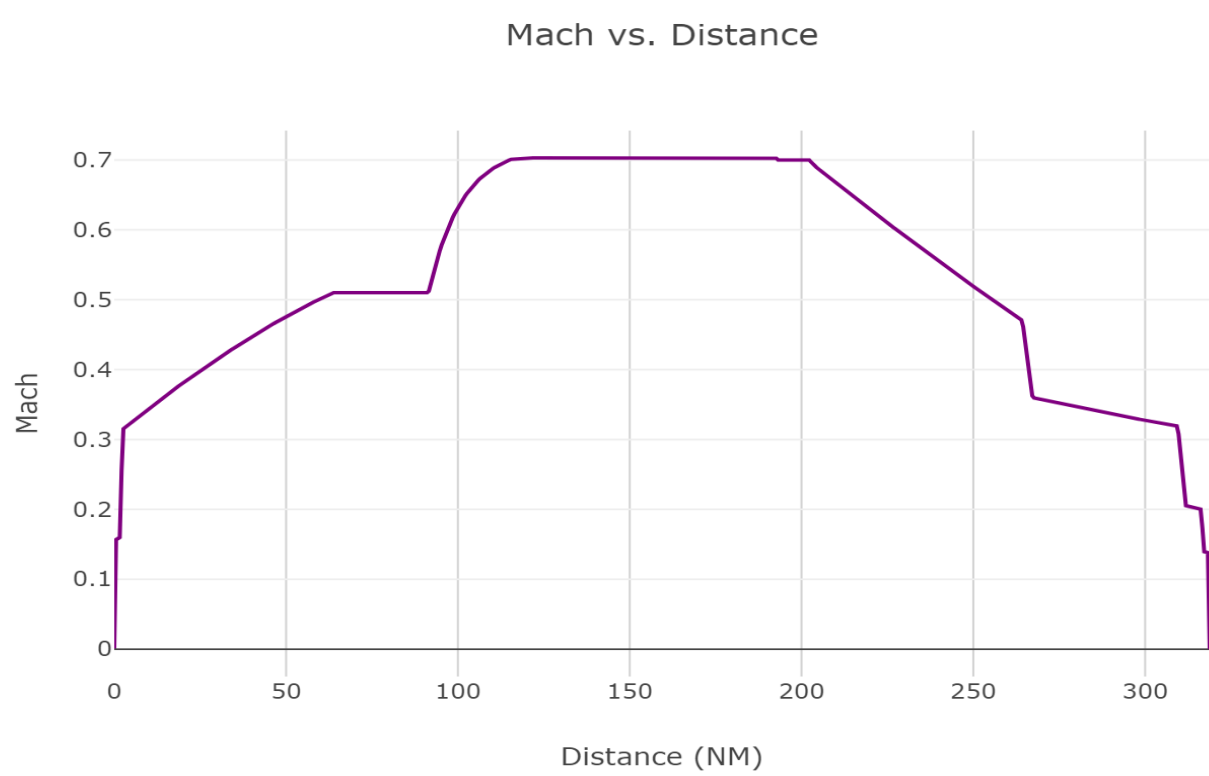

Fuel Remaining vs. Distance

