


USER GUIDE

Binary Clock-Barometer

1. DEVICE ANATOMY

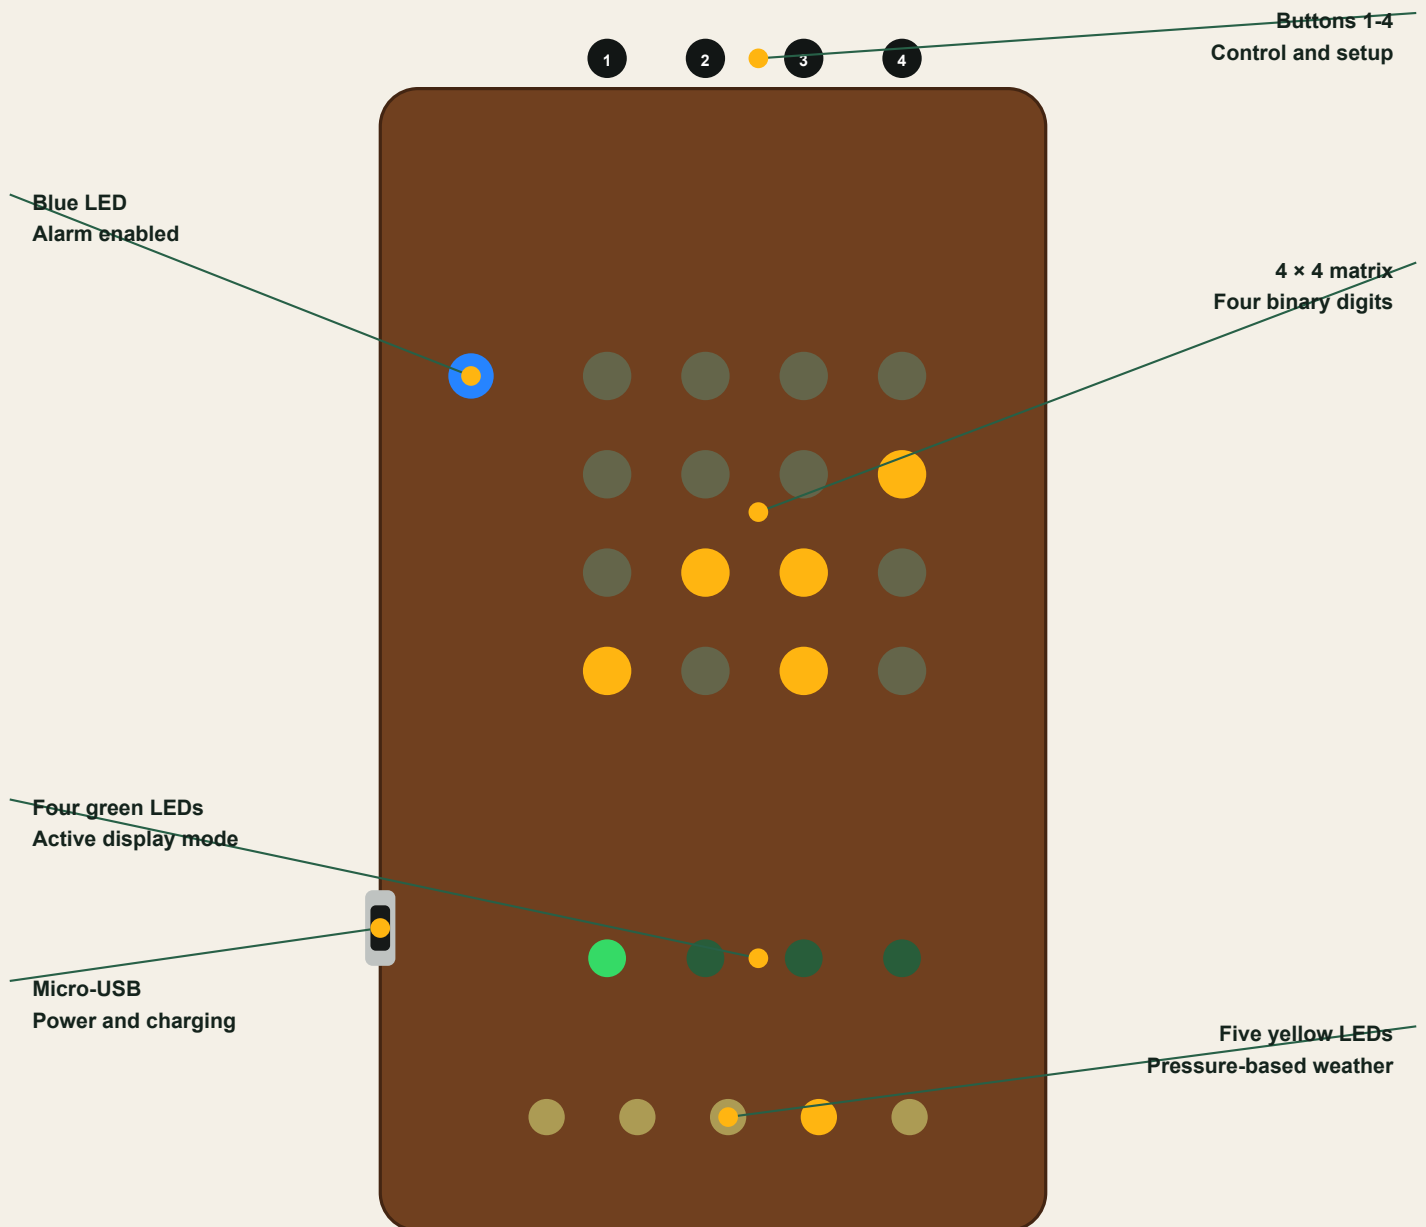

BUTTONS IN NORMAL OPERATION

- 1 EDIT / NEXT / SAVE**
Enter clock or alarm editing.
- 3 PLUS**
Increase the selected digit; also used in the alarm-disable command.

- 2 MINUS**
Decrease the selected digit while editing.
- 4 CHANGE MODE**
Cycle through the display modes.


USER GUIDE

Binary Clock-Barometer

2. READING THE DISPLAY

Each column represents one decimal digit. Illuminated LEDs contribute their weights: 8, 4, 2 and 1 from top to bottom.

EXAMPLE: 12:34

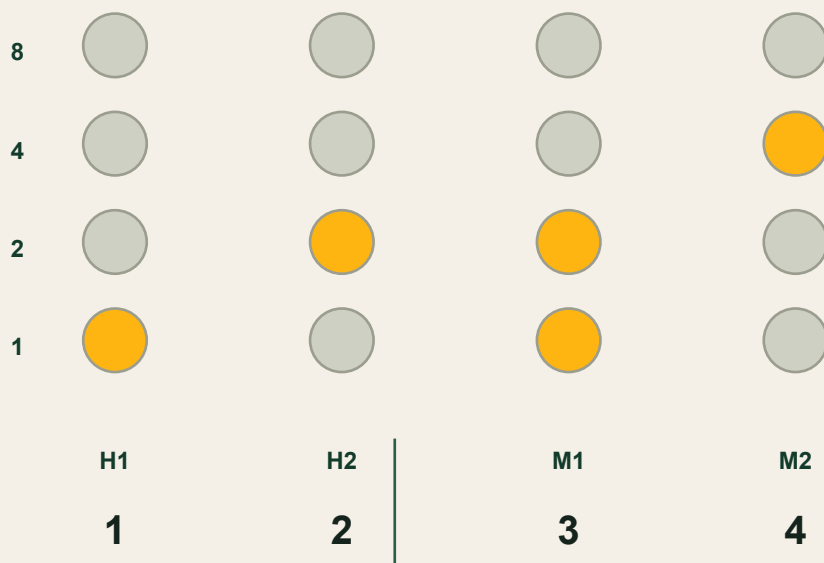

GREEN MODE INDICATORS - LEFT TO RIGHT



CLOCK
HH:MM



DATE
DD:MM



TEMP. / HUM.
TT:HH



ALARM
HH:MM

LOWER BAROMETER SCALE - LEFT TO RIGHT



STORM



RAIN



CLOUDY



CLEAR



DRY

POWER AND BRIGHTNESS


Micro-USB powers the device and charges the built-in Li-Po battery. The BH1750 automatically changes LED brightness according to ambient light.

USER GUIDE


Binary Clock-Barometer

3. STEP-BY-STEP OPERATION


BUTTONS IN NORMAL OPERATION

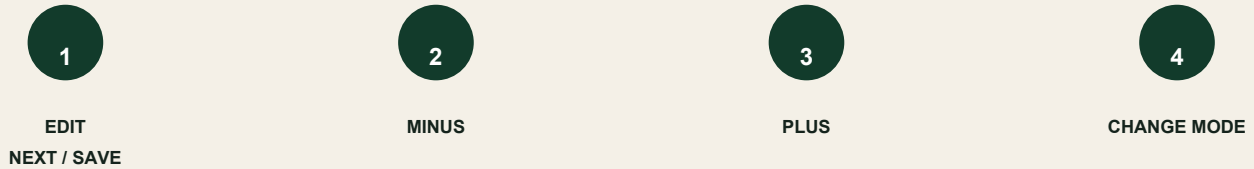


SET THE CLOCK

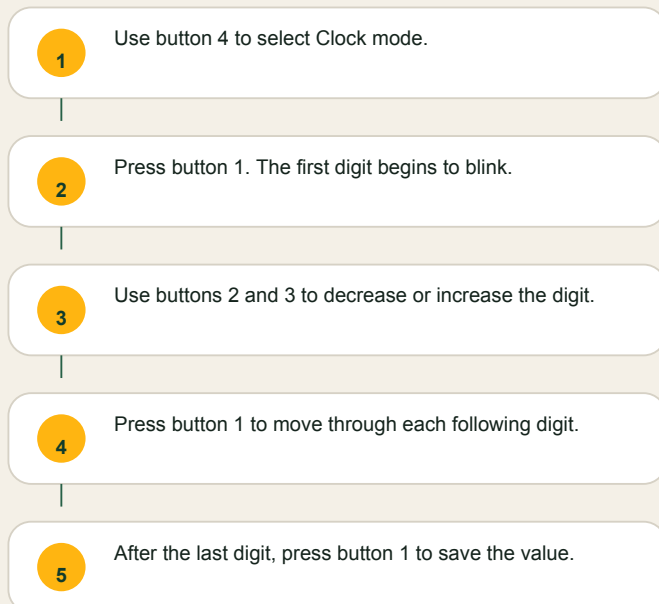

SET THE ALARM

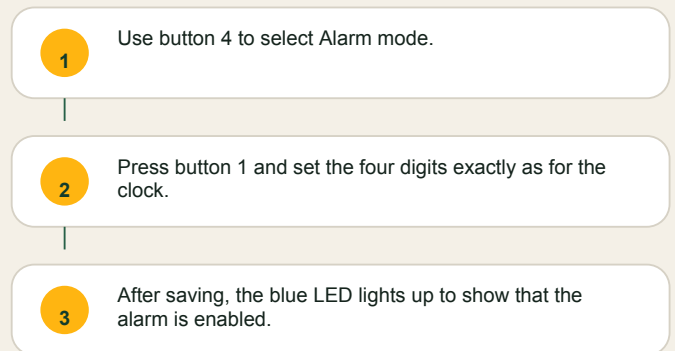

DISABLE THE ALARM

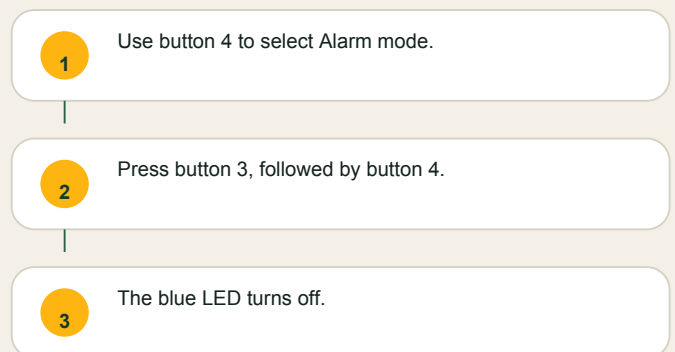

WHEN THE ALARM SOUNDS

Press any of the four buttons to silence the audible signal.