


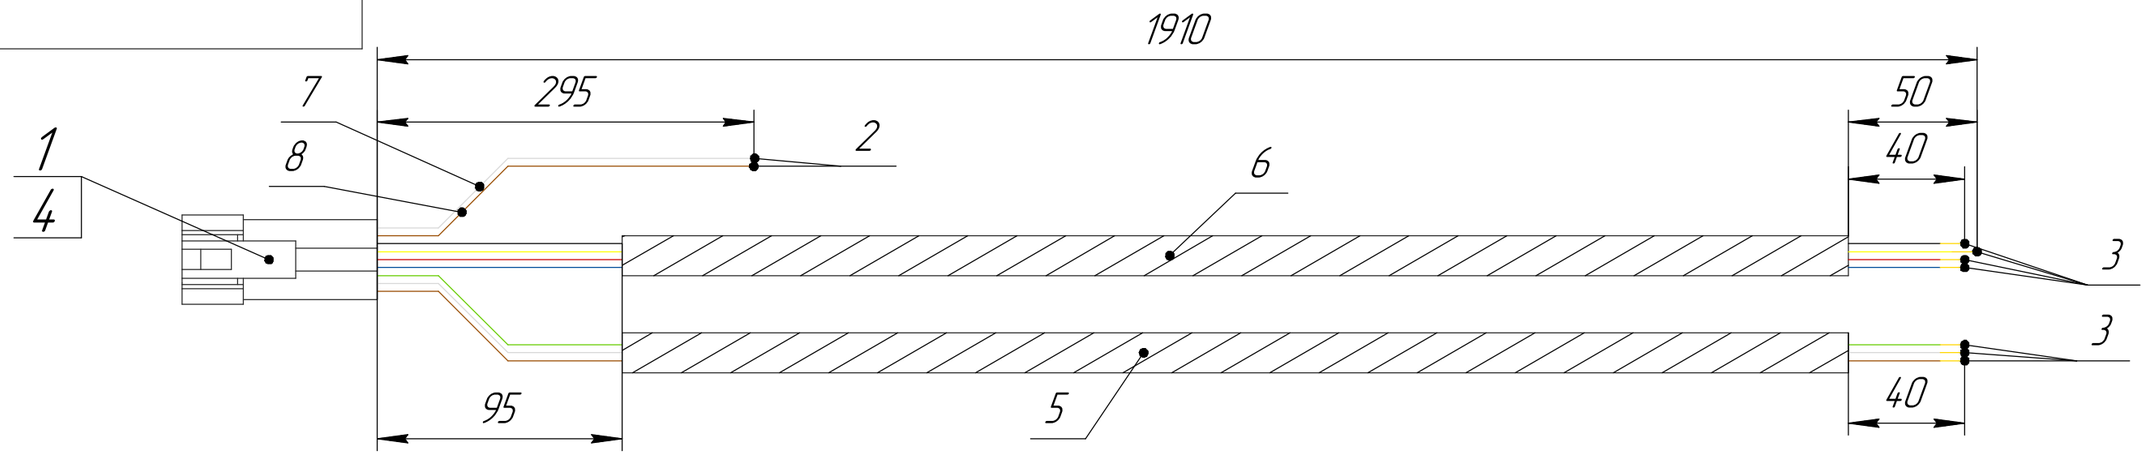




A

View A





X1

			Pos.
	1	Yellow 0,75 mm ^{2}	6
	2	Blue 0,75 mm ^{2}	6
	3	White 0,75 mm ^{2}	7
	3	White 0,75 mm ^{2}	5
	4	Green 0,75 mm ^{2}	5
	5	Brown 0,75 mm ^{2}	8
	6	Red 0,75 mm ^{2}	6
	7	Brown 0,75 mm ^{2}	5
	7	Black 0,75 mm ^{2}	6

1. Scratches, exposed conductors, and other defects are not permitted on the outer insulation.
2. The length, color, and specifications of the wires shall comply with the requirements of the drawing. The lengths of the cut wires shall be identical.
3. Splitting of the strands, improper crimp formation, or other defects are not permitted in the crimped area.
4. Perform a 100% electrical continuity test.

Format	Zone	Pos.	Designation	Part Name	Qty.	Notes
				Other Products		
		1	X1	9-pin connector 928522-1	1	pcs.
				for automotive use		
		2		Terminal 42238-2	2	pcs.
		3		Terminal DJ451-1	7	pcs.
		4		Contacts 964267-2	7	pcs.
				Materials		
		5		3x0.75 mm ^{2} stranded cable	1,91	m.
		6		4x0.75 mm ^{2} stranded cable	1,91	m.
		7		1x0.75 mm ^{2} white wire	0,295	m.
		8		1x0.75 mm ^{2} brown wire	0,295	m.

Revision	Sheet	Document No.	Signature	Date
Designed by				
Checked by				
T. Control				
S. Control				
Approved by				

Document Class	Mass	Scale
Sheet	Sheets 1	

Copied by

Format A3

First Use

Reference No.

Signature and Date

Replacement Inventory No.

Signature and Date

Original Inventory No.