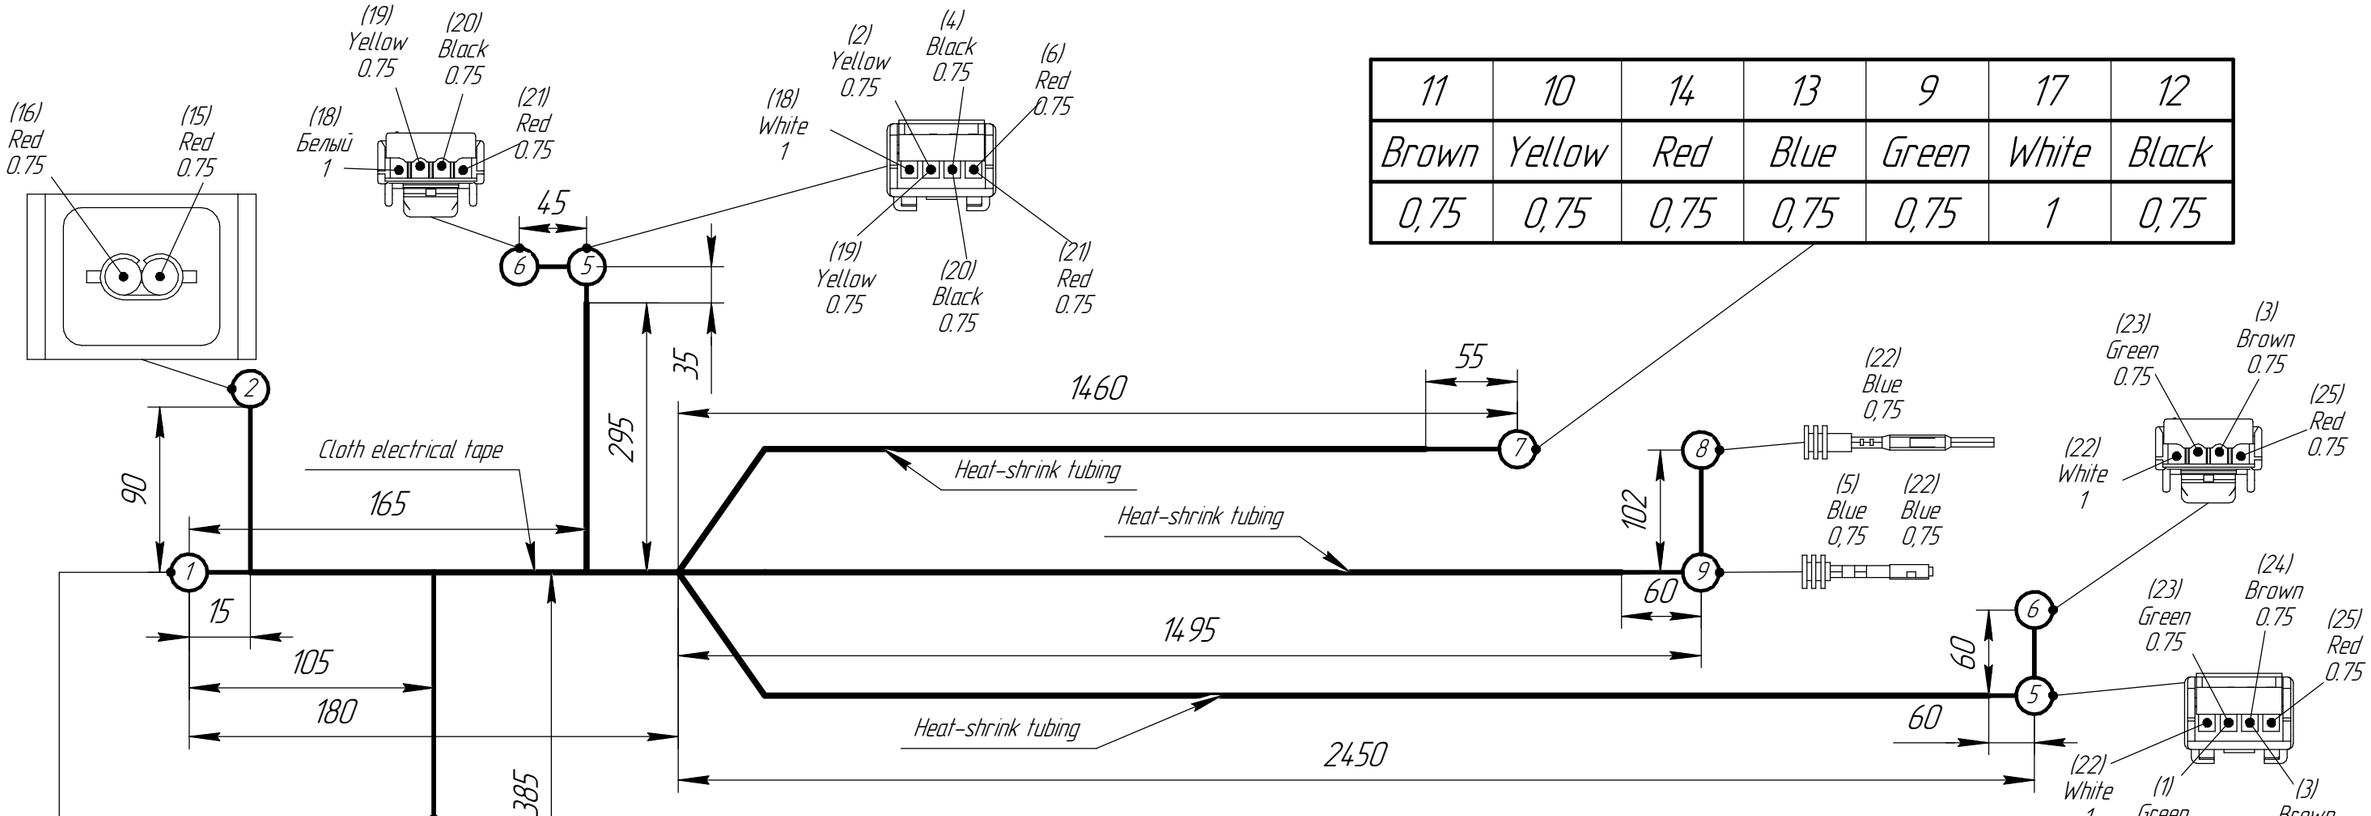


11	10	14	13	9	17	12
Brown	Yellow	Red	Blue	Green	White	Black
0,75	0,75	0,75	0,75	0,75	1	0,75

16	15	14	13	12	11	10	9
Red 0.75	Red 0.75	Red 0.75	Blue 0.75	Black 0.75	Brown 0.75	Yellow 0.75	Green 0.75
8		6	5	4	3	2	1
Black 0.5		Red 0.75	Blue 0.75	Black 0.75	Brown 0.75	Yellow 0.75	Green 0.75

1. Scratches, exposed conductors, and other defects are not permitted on the outer insulation.
2. The length, color, and specifications of the wires shall comply with the requirements of the drawing. The lengths of the cut wires shall be identical.
3. Splitting of the strands, improper crimp formation, or other defects are not permitted in the crimped area.
4. Perform a 100% electrical continuity test.

Format	Zone	Pos.	Designation	Part Name	Qty.	Notes
				Other Products		
		1		Connector L-KLS1-4.20-2X08-MH	1	pcs.
				Terminal L-KLS1-4.20-FT	15	pcs.
		2		Connector 12058980	1	pcs.
				Terminal 42241-2	1	pcs.
		3		Cargen AX389	1	pcs.
		4		Cargen AX388	1	pcs.
		5		Connector 174929-2	2	pcs.
				Terminal 173645-1	8	pcs.
		6		Connector 174922-2	2	pcs.
				Terminal 173631-1	8	pcs.
		7		Terminal DJ451-1	7	pcs.
		8		Terminal 15344866	1	pcs.
		9		Terminal 12048074-L	1	pcs.