



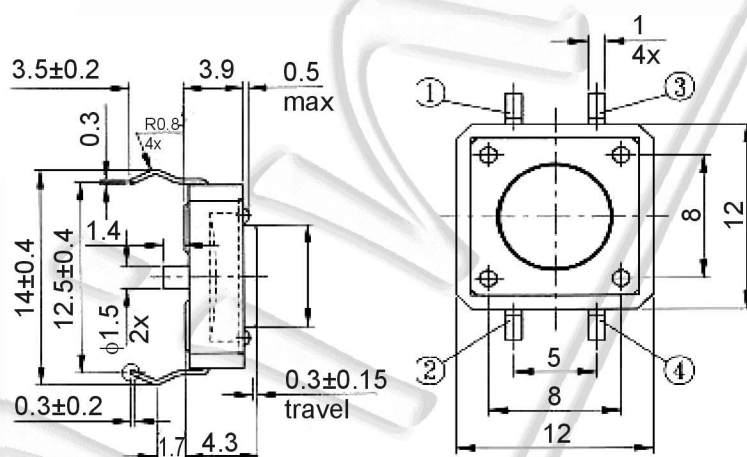

Specification:

- 1) Rating: 12 VDC, 50 mA
- 2) Travel: 0.25 ± 0.1 mm
- 3) Contact resistance: 100 mW max.

TACT-24N

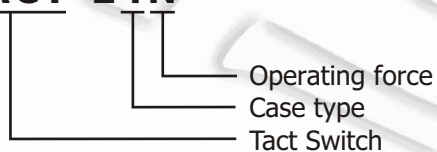

OPERATING FORCE

N	160±50 gf
R	250±100 gf

CASE TYPE

4	plastic case
5	metal case

CIRCUIT DIAGRAM

