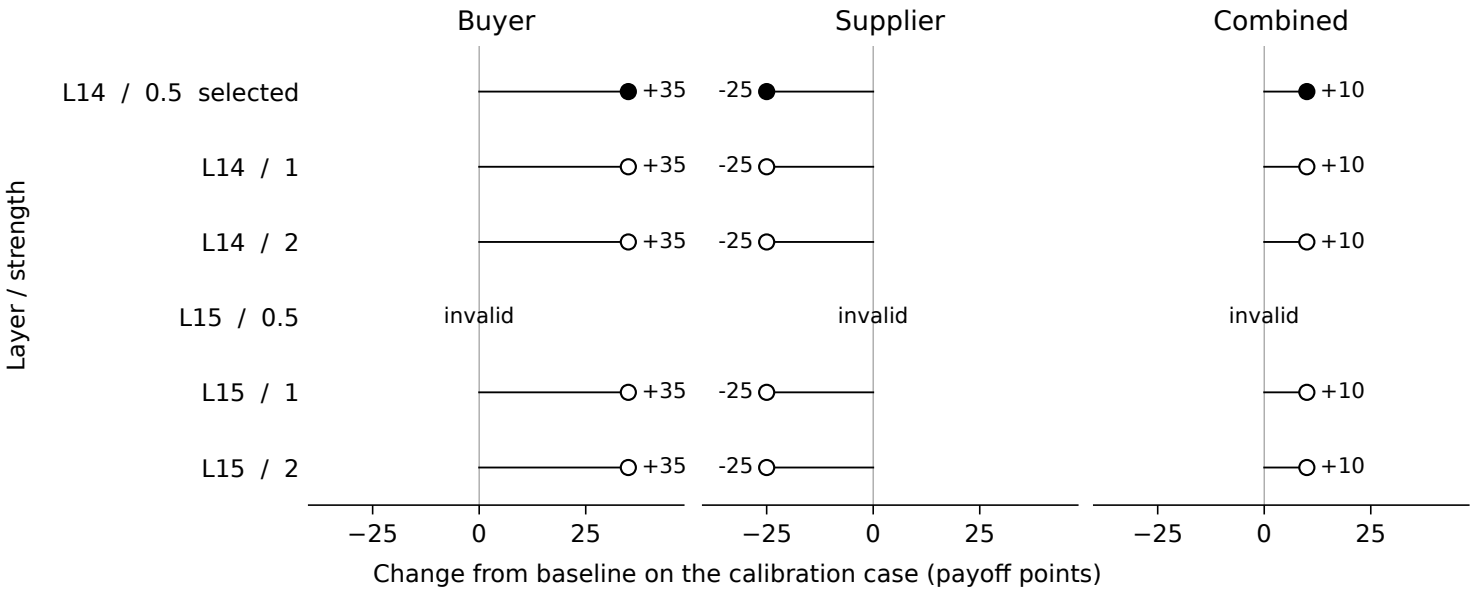
One-case calibration: filled point selected; open points are other valid settings
Buyer
Supplier
Combined
Layer / strength
L14 / 0.5 selected
L14 / 1
L14 / 2
L15 / 0.5
L15 / 1
L15 / 2
+35
-25
+10
invalid
−25
0
25
Change from baseline on the calibration case (payoff points)