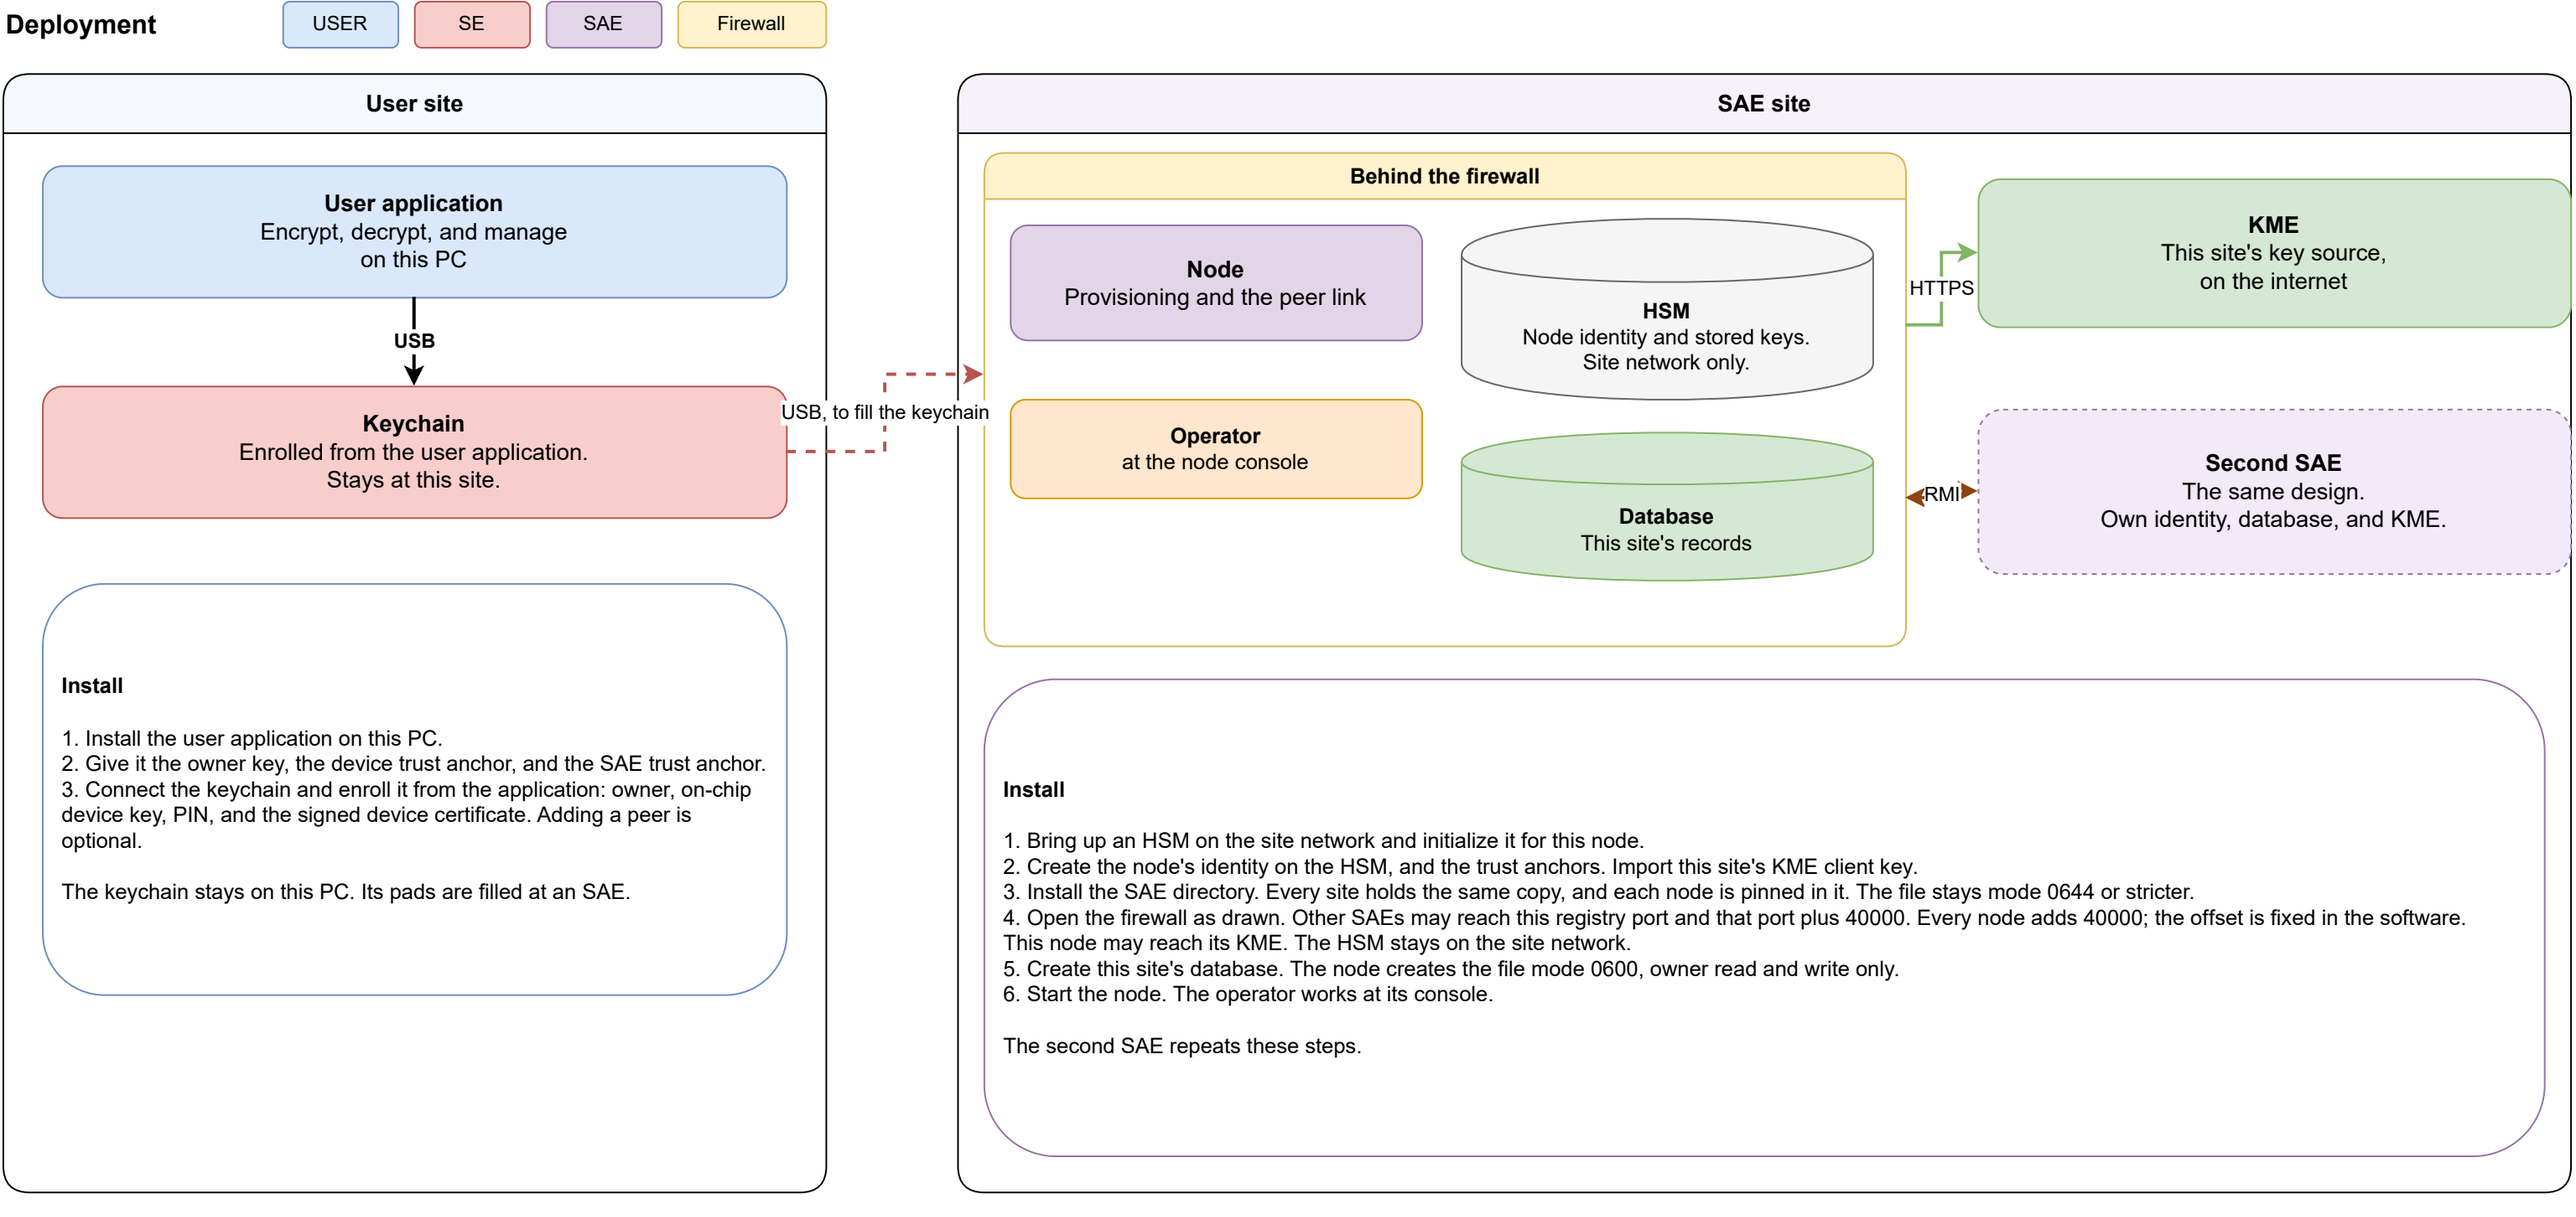

Deployment
USER
SE
SAE
Firewall
User site
User application
Encrypt, decrypt, and manage
on this PC
USB
Keychain
Enrolled from the user application.
Stays at this site.
USB, to fill the keychain
Install
1. Install the user application on this PC.
2. Give it the owner key, the device trust anchor, and the SAE trust anchor.
3. Connect the keychain and enroll it from the application: owner, on-chip device key, PIN, and the signed device certificate. Adding a peer is optional.
The keychain stays on this PC. Its pads are filled at an SAE.
SAE site
Behind the firewall
Node
Provisioning and the peer link
HSM
Node identity and stored keys.
Site network only.
Operator
at the node console
Database
This site's records
HTTPS
KME
This site's key source,
on the internet
RMI
Second SAE
The same design.
Own identity, database, and KME.
Install
1. Bring up an HSM on the site network and initialize it for this node.
2. Create the node's identity on the HSM, and the trust anchors. Import this site's KME client key.
3. Install the SAE directory. Every site holds the same copy, and each node is pinned in it. The file stays mode 0644 or stricter.
4. Open the firewall as drawn. Other SAEs may reach this registry port and that port plus 40000. Every node adds 40000; the offset is fixed in the software. This node may reach its KME. The HSM stays on the site network.
5. Create this site's database. The node creates the file mode 0600, owner read and write only.
6. Start the node. The operator works at its console.
The second SAE repeats these steps.