LATE RELEASES of NEW PRODUCTS

(A) New Astatic "Cardinal" Mike

CRYSTAL — DYNAMIC

A compact, versatile, economical new model microphone available in both crystal or dynamic models whose performance compares favorably with many higher priced models. Case is die cast and finished in bright gold. Dark brown plastic base is available separately. Wide-range response, 30-10,000 c.p.s.; high output level. May be used on floor stand, desk stand, or as hand mike. Adaptable to standard AC or DC circuits. Furnished with 15-ft. cable.

Cat. No.	Type	Recommended Load	Output	Net Ea.
20-010	CX*	5 Meg.	−50 db.	$5.73
20-011	CX-1†	5 Meg.	−50 db.	5.73
20-012	CD5	500 ohms	−62 db.	11.47
20-013	CDH	5 Meg.	−50 db.	11.47

* Model CX smooth response 30-10,000 c.p.s.

† Model CX-1 rising characteristic between 1500 and 5500 c.p.s. speech range.


Cat. No. **20-014** Base sold separately.

Net Price 59c

(B) Tru-sonic Model C-1 Microphone

Operating on a truly unique principle, different from that of any other microphone available today, performance of the Stephens Model C-1 is the outstanding microphone development of recent years. Many unequalled features due to utilization of phase-modulated crystal-controlled carrier frequency with remotely located oscillator/demodulator. Head operates on principle of minute capacity changes that produce electrical energy. Absolutely flat response throughout entire audio range. Small size, 1 x 1½" pickup, reduces acoustic interference pattern, permits more freedom of movement and placement. Operated directly into line. Superior signal-to-noise ratio. No polarized voltage on diaphragm, permitting close spacing and high pressure sensitivity. High output level — 10 db. Lightweight and rugged to stand unusual abuse. Freedom from "bloops" and "blops" in close talking. Non-microphonic because oscillator/demodulator is removed from operating area. Diaphragm diameter is ½", minimizing phase cancellations at audible frequencies. Output impedance 200 ohms. Operates on 110–120 volts AC. Pickup and demodulator carried in 8½ x 9½ x 7¼" leatherette case with 30' coax cable, 15' shielded cable, AC cord, all fittings.

Cat. No. **20-090** C-1 Microphone system as above. Net Price $290.00

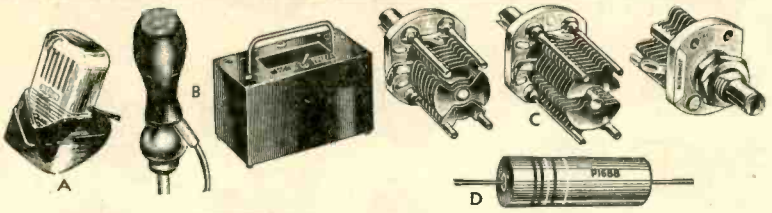

(C) Johnson Miniature Variable Capacitors

The smallest variable built, these new Johnson miniature capacitors are ideal for small assemblies. ⅜" wide x ¾" high overall; depth behind panel ranges from ²³/₄₄" for smallest types to 1 ¹¹/₄₄" for largest capacity value type. Single-hole mounting, flats on mounting prevent turning. Beryllium copper contact spring. Split sleeve rotor bearing — no wobble to shaft; steatite end frame. Nickel plate finish. Voltage breakdown 750 volts r.m.s. at 210 mc. 0.15" spacing.

Cat. No.	Type	Plates	Max. Mmf.	Min. Mmf.	Net Price
		SINGLE			
18-601	160-102	5	5.14	1.55	$0.94
18-602	160-104	9	8.69	1.73	1.00
18-603	160-107	15	14.58	2.15	1.09
18-604	160-110	21	19.7	2.6	1.18
		DIFFERENTIAL TYPE			
18-605	160-303	7	5.58	1.84	1.27
18-606	160-305	13	9.30	1.98	1.39
18-607	160-308	22	14.82	2.32	1.54
18-608	160-311	31	19.30	2.67	1.71
		BUTTERFLY TYPE			
18-609	160-203	7	3.30	1.72	1.36
18-610	160-205	13	5.27	2.10	1.47
18-611	160-208	22	8.50	2.72	1.71
18-612	160-211	31	11.02	3.20	1.88

(D) Aerovox Duranite Molded Tubular Capacitors

Entirely new DURANITE provides permanent, non-varying, rock-hard casing with smooth, clean surface. Pigtail leads will not pull out or work loose. Moisture-proof, they stand up under extreme temperatures from sub-zero to 212° F. Temperature co-efficient of capacitance similar to wax and oil capacitors. Smaller dimensions than conventional tubulars.

Cat. No.	Mfd.	Net	Cat. No.	Mfd.	Net
	P288 — 200 VDC W.				
07-401	.015	15c	07-404	.1	21c
07-402	.04	18c	07-405	.5	35c
07-403	.05	18c			
	P488 — 400 VDC W.				
07-406	.006	15c	07-410	.05	18c
07-407	.01	15c	07-411	.1	21c
07-408	.02	15c	07-412	.25	26c
07-409	.03	18c			
	P688 — 600 VDC W.				
07-413	.001	15c	07-420	.01	18c
07-414	.0015	15c	07-421	.02	18c
07-415	.002	15c	07-422	.03	21c
07-416	.003	15c	07-423	.04	21c
07-417	.004	15c	07-424	.05	24c
07-418	.005	15c	07-425	.1	26c
07-419	.006	15c			


RCA TEST RACK For Complete TV, FM and AM Testing

At last — to enable the up-to-date serviceman to keep abreast of the ever-changing requirements of modern servicing, RCA engineering has produced this invaluable equipment. Provides all the test equipment the serviceman needs to cope with complex service problems of all TV, FM, and AM receivers. The six RCA instruments furnished with the complete table rack are of the noted RCA quality, all are designed to do their job with the utmost convenience, precision, and completeness. 48 x 33 x 12½" deep.

Cat. No. **32-035** Table Rack with 6 test units described below.

Net Price $1099.00

Cat. No. **32-036** RCA Table rack only. Net Price $90.00

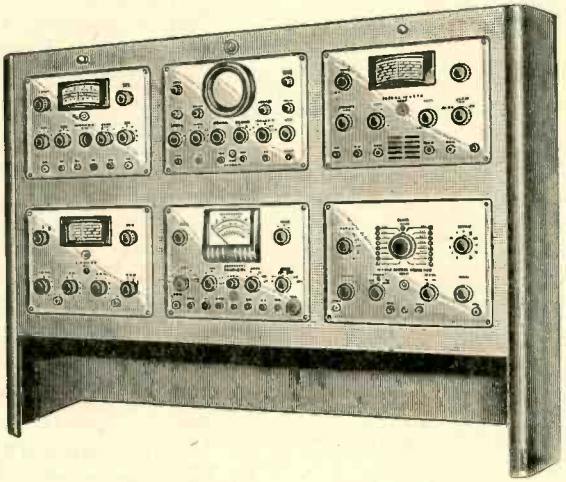

WV-95A Master Voltohmyst

A foremost model of the famed RCA Voltohmyst test instrument line. Range: AC volts, 0–1000 in 7 steps; DC volts, 0-1000 in six steps (11 megohms input resistance); flat 30-20,000 c.p.s.; 0-10 DC amps in 6 ranges; ohms 0-1000 megs in 6 ranges; minimum reading 1 microamp.; capacitance, 5 mmf. to 1000 mfd. with polarizing voltage on high. Operates on 105–125 volts, 50-60 cycles. 9¾ x 13½ x 7½".

Cat. No. **32-005** Net Price $152.50

WR-59A TV Sweep Generator

I.f./v.r. ranges: 0-10 Mc. video; 5-15 Mc. prewar pix i.f.; 20-30 Mc.; 20-30 Mc. postwar pix i.f. FM i.f. 10-11.5 Mc.; TV sound i.f. 20.25-22.25 Mc.; 25-40 Mc. spare; 13 TV r.f. channels. Output .1-.175 volts RMS. Output impedance: r.f., matched with 300 ohms balanced to ground; i.f./v.r., cable terminated in 100 ohms. Power supply, 105-125 volts 50/60 cycles; consumption, 36 watts. Includes 1 WR-59A TV sweep unit, 1 power cord, 1 i.f./v.r. output cable, 1 r.f. output cable. 7½ x 10 x 13½".

Cat. No. **32-041** Net Price $325.00

WR-39A Television Calibrator

A signal source, heterodyne detector, and crystal standard for producing all the standard RMA frequencies used in Television service. TV calibration, 19 Mc-120 Mc. in 4 bands, 170-240 Mc. in two bands. Tuning ratio 10:1. Output .1 volts R.M.S. min.; output impedance 100 ohms; output control range 100 to 1. Audio characteristics: gain, approximately 1000; output to speaker or phone jack; max. output .3 watts. Internal crystal standards. Complete with power cord and output cable, built-in speaker.

Cat. No. **32-042** Net Price $250.00

Model WR-67A Test Oscillator

Cat. No. **32-012** See full description of this instrument in Signal Generator Section, page 47, of this catalog. Net Price $89.50

Model WA-54A Audio Oscillator

Cat. No. **32-015** See full description of this instrument on page 47 in Signal Generator Section of this catalog. Net Price $152.50

WO-55A 3" Oscilloscope

An invaluable aid for servicing FM, and AM sets, an indispensable instrument for TV servicing. Ruled screen for measuring peak-to-peak voltages with internal voltage source for calibration. Vertical and horizontal sensitivity 1.4 volts per inch, peak-to-peak. Input impedance, .5 megohms and 55 mmf. Range up to 200 Kc. Operates on 105–125 volts, 50–60 cycles. Lightweight, uses miniature tubes to effect economy of test panel space, 9¾ x 13½ x 7½".

Cat. No. **32-028** Net Price $129.50