

Power Outputs


Power for GigaBlox




Power for Rugged GigaBlox




VBAT_P -> 3V3 Converter

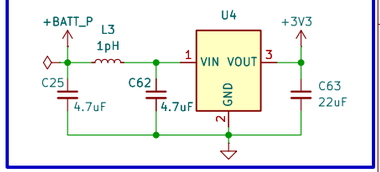

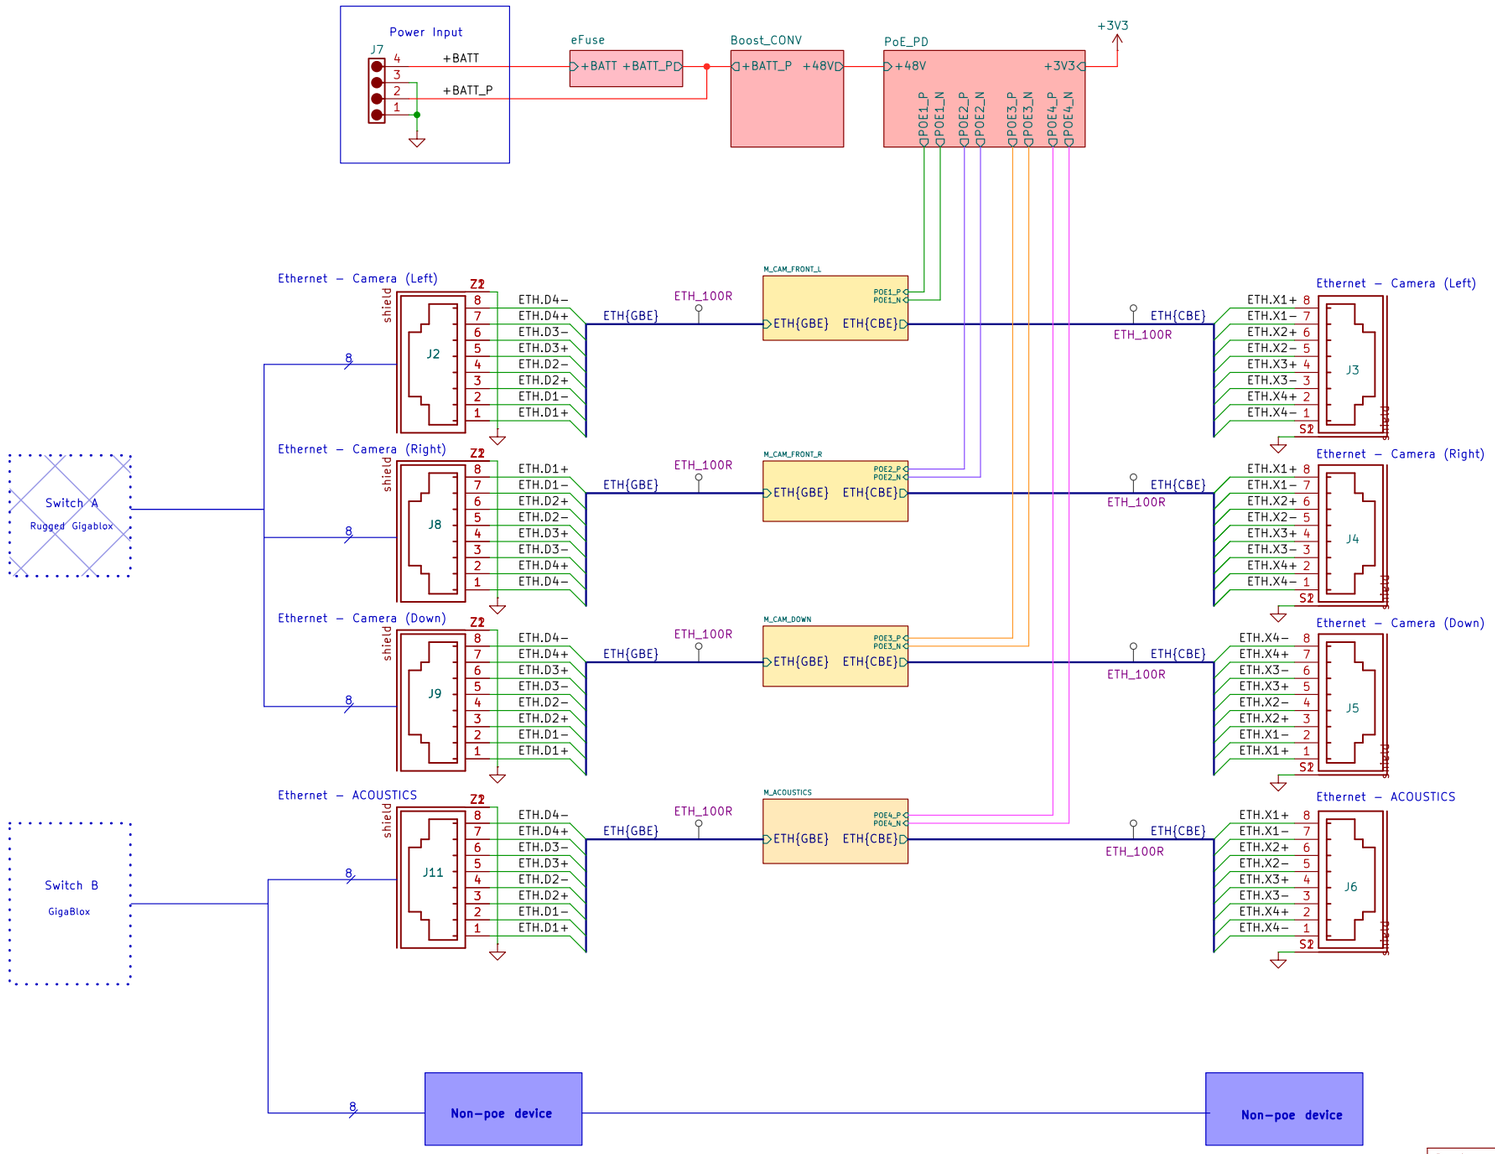

Designed by: Yamn	
Project: orin–interface	
Sheet: /	
File: orin–interface.kicad_sch	
Title:	
Size: User	Date:
KiCad E.D.A. 10.0.0	**Rev:** Id: 1/8

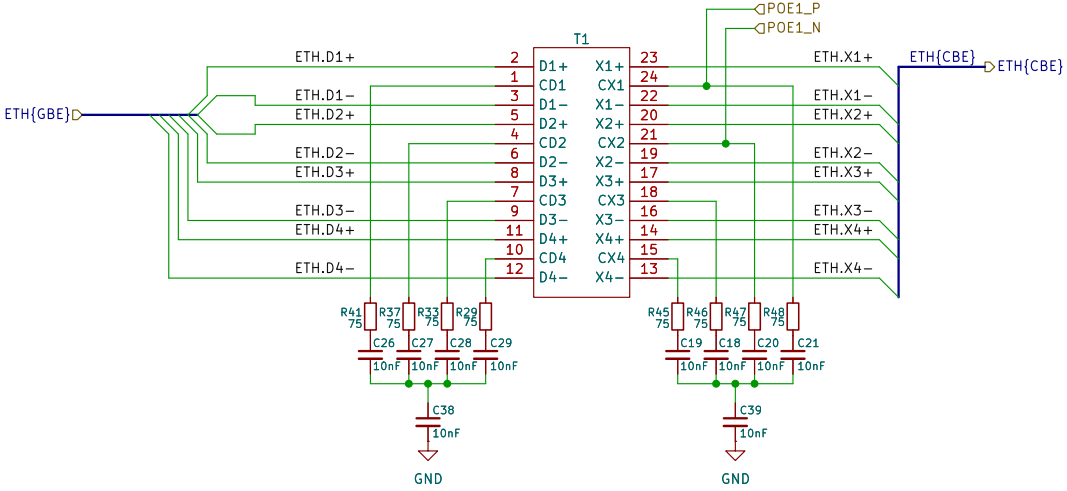

Designed by:


Project: orin-interface

Sheet: /M_CAM_FRONT_L/


File: M_CAM_FRONT_L.kicad_sch

Title:

Size: A5	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 4/8

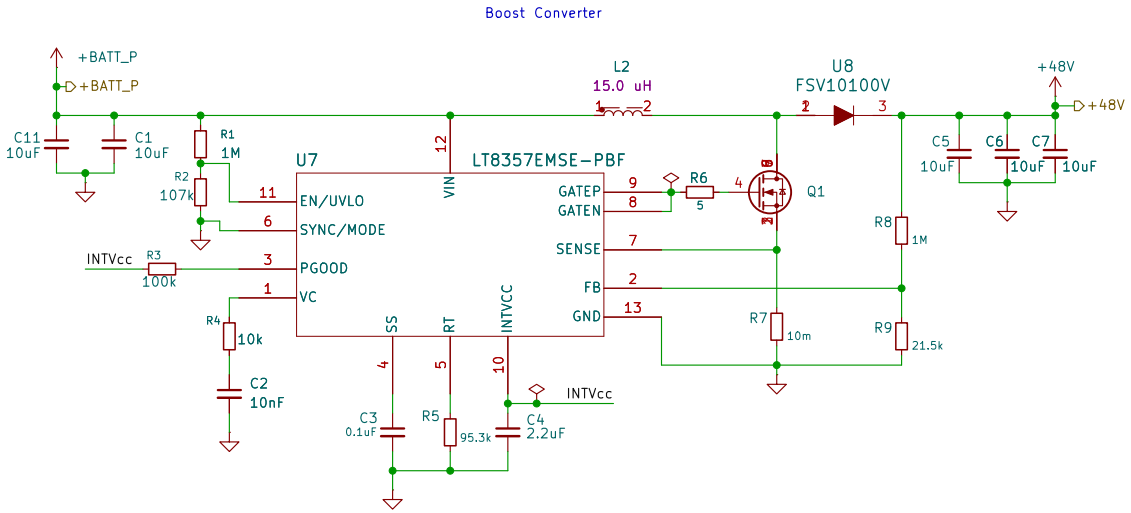

Designed by:		
Project: orin-interface		
Sheet: /Boost_CONV/		
File: Boost_CONV.kicad_sch		
Title:		
Size: A5	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 6/8

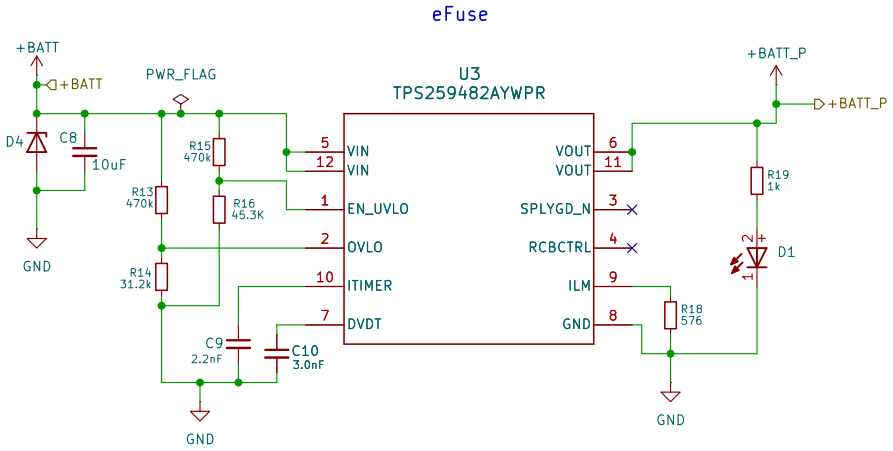

U2 – TPS259480A eFuse (J1 input protection)
Auto-retry, reverse-current blocking always on

OVLO: 470k / 31.2k (0.5%) → trips 19.3 V, recovers 17.7 V
UVLO: 470k / 45.3k (1%) → on 13.7 V, off 12.5 V (≈3.1 V/cell)
ILIM: 576 Ω (1%) → 8.4 A limit (fast-trip ≈15 A)
Requires 2× V+ / 2× GND pins on J1
ITIMER: 2.2 nF C0G → ≈1.75 ms overcurrent blanking
dVdt: 4.7 nF C0G 50 V → ≈16 ms soft-start, ≈0.5 A inrush @ 470 µF


SPLYGD: NC (only needed for dual-input power muxing)

Designed by:


Project: orin-interface
Sheet: /eFuse/
File: eFuse.kicad_sch

Title:


Size: A5	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 8/8

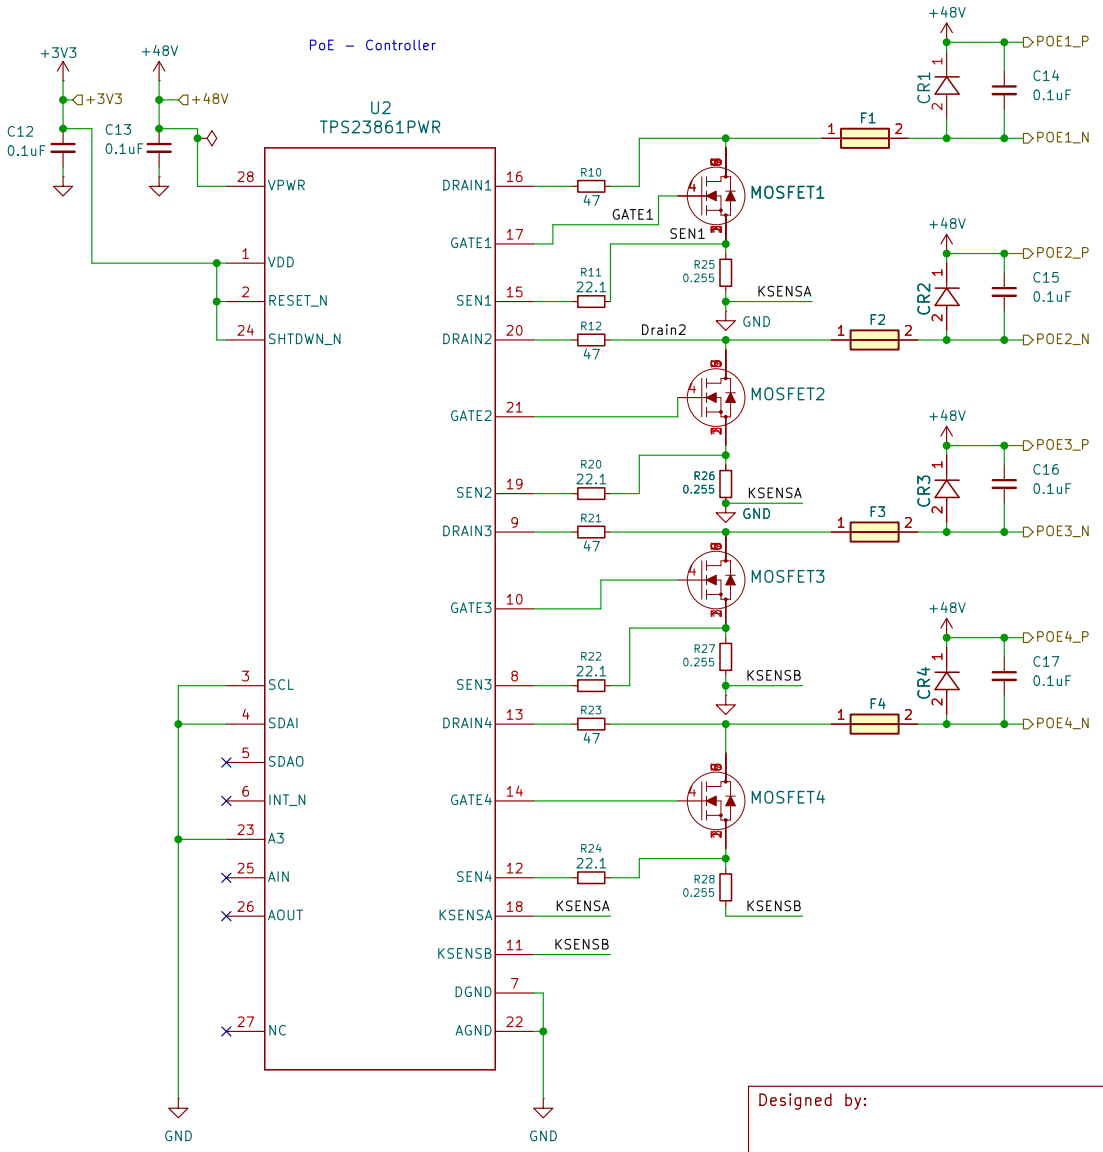

Designed by:		
Project: orin-interface		
Sheet: /PoE_PD/		
File: PoE_PD.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 9/8

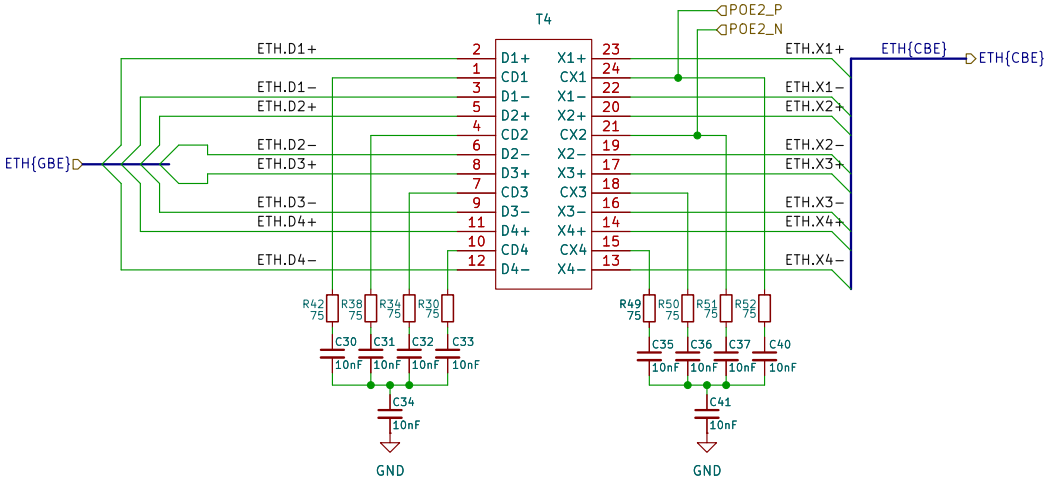

Designed by:		
Project: orin−interface		
Sheet: /M_CAM_FRONT_R/		
File: M_CAM_FRONT_R.kicad_sch		
Title:		
Size: A5	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 10/8

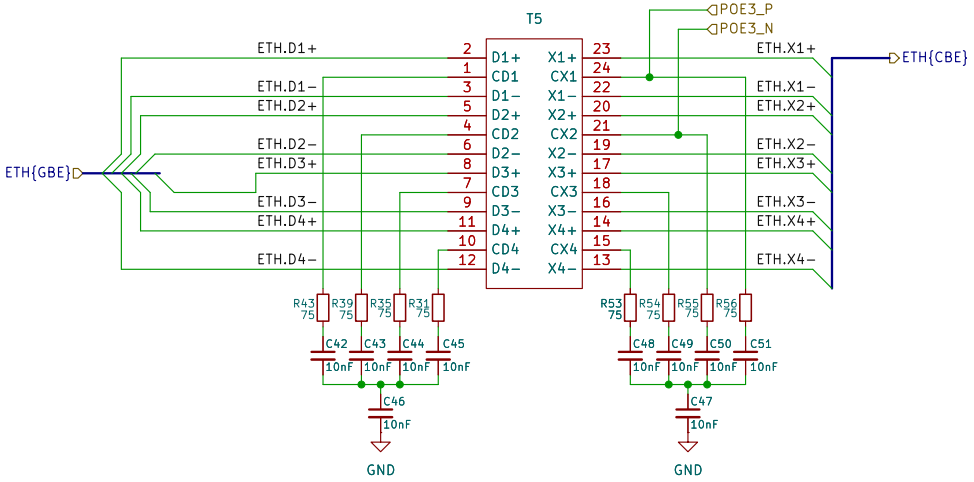

Designed by:


Project: orin-interface

Sheet: /M_CAM_DOWN/

File: M_CAM_DOWN.kicad_sch

Title:

Size: A5	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 11/8

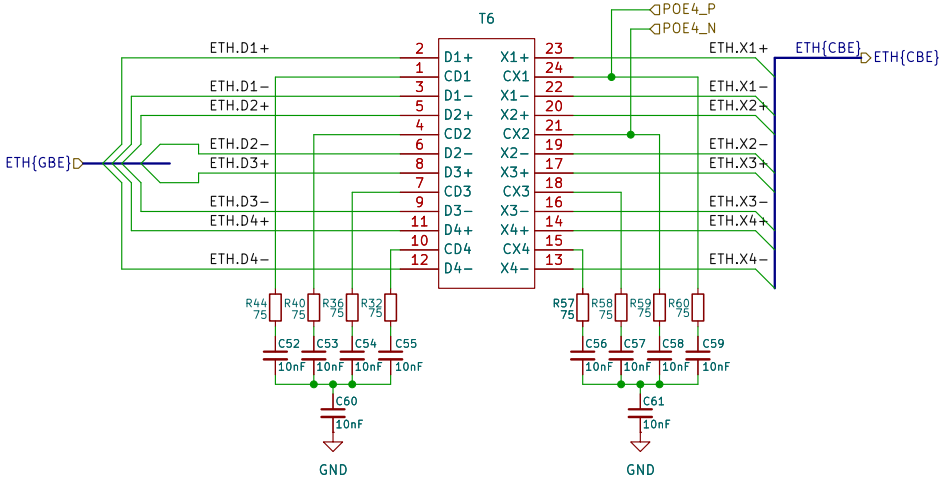

Designed by:

Project: orin-interface

Sheet: /M_ACOUSTICS/

File: M_ACOUSTICS.kicad_sch

Title:

Size: A5	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 12/8