

NOTES (UNLESS OTHERWISE SPECIFIED):

1. MATERIAL SPECIFICATIONS:

1. MATERIAL: 5052 - H32, ALUMINUM

2. THICKNESS: 2.0 mm [0.080"]
2. COSMETIC SPECIFICATIONS:

1. FINISH: POWDER COATING, THICKNESS 0.0025"

2. COLOR: SINBAD PURPLE (PRISMATIC POWDERS PN: PSS-1676)
3. MECHANICAL SPECIFICATIONS:

1. BREAK AND DEBURR ALL SHARP CORNERS AND EDGES.

2. INSTALL ANY SELF CLINCHING FASTENERS PER MANUFACTURES RECOMMENDATIONS.
4. GENERAL SPECIFICATIONS:


1. THIS IS A PARTIALLY DIMENSIONED DRAWING. NON-EXPLICIT DIMENSIONS ARE REFERENCED FROM 3D MODEL.

2. ALL DIMENSIONS ARE RELATED TO DATUM A (PRIMARY), DATUM B (SECONDARY), DATUM C (TERTIARY).




3. INTERPRET DRAWING PER ASME Y14.5.

4. GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED:


| DIMENSION (mm) | +/- |
|----------------------|-------------|
| FEATURE TO FEATURE: | 0.1 |
| EDGE TO HOLE: | 0.25 |
| EDGE TO EDGE: | 0.25 |
| HOLE / FEATURE SIZE: | 0.05 / 0.08 |
| FOLD TO HOLE: | 0.4 |
| FOLD TO EDGE: | 0.25 |
| FOLD TO FOLD: | 0.5 |

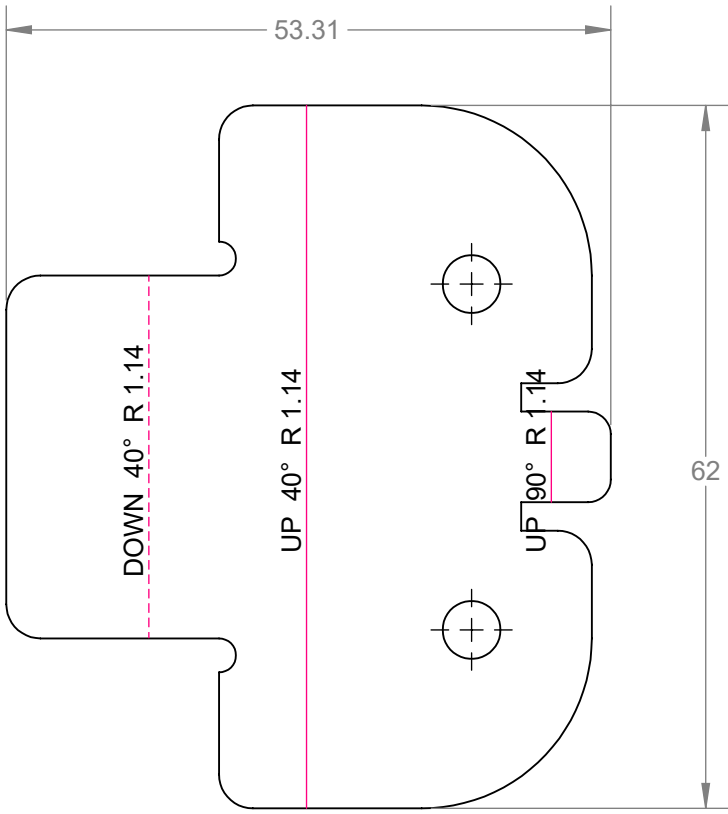

FLAT PATTERN

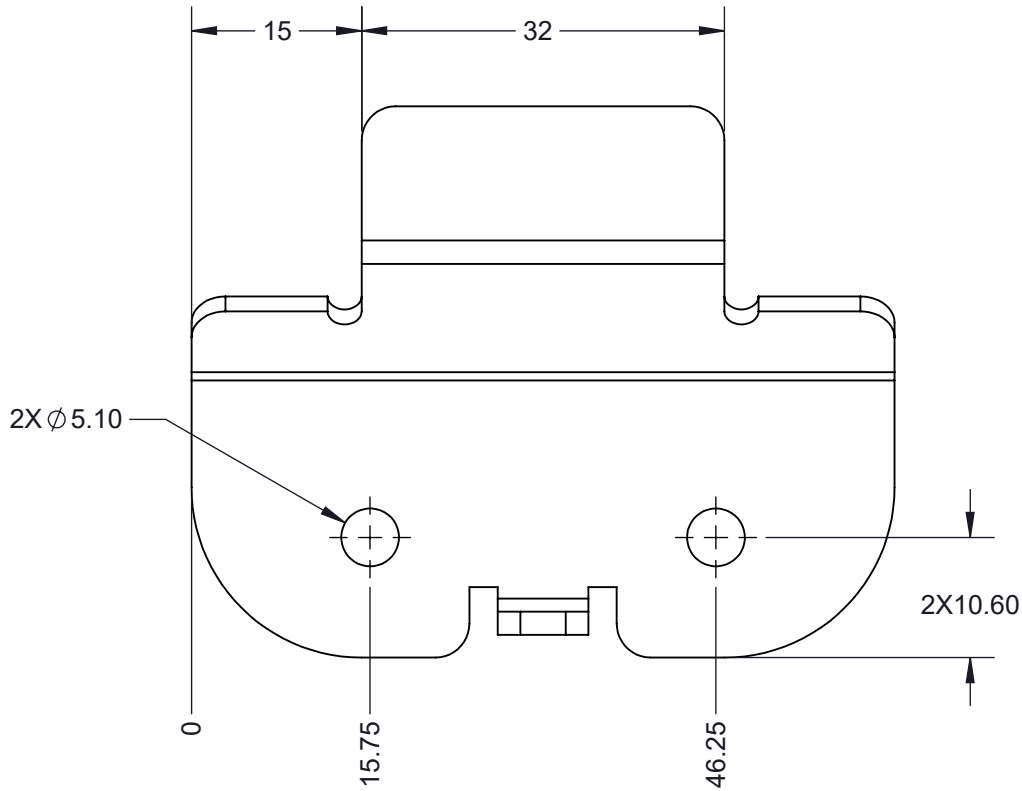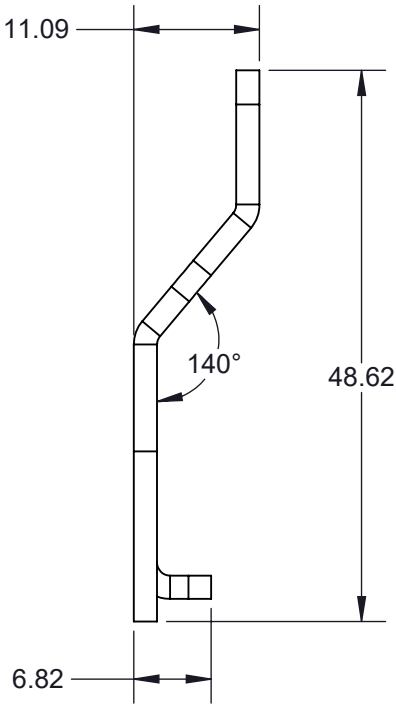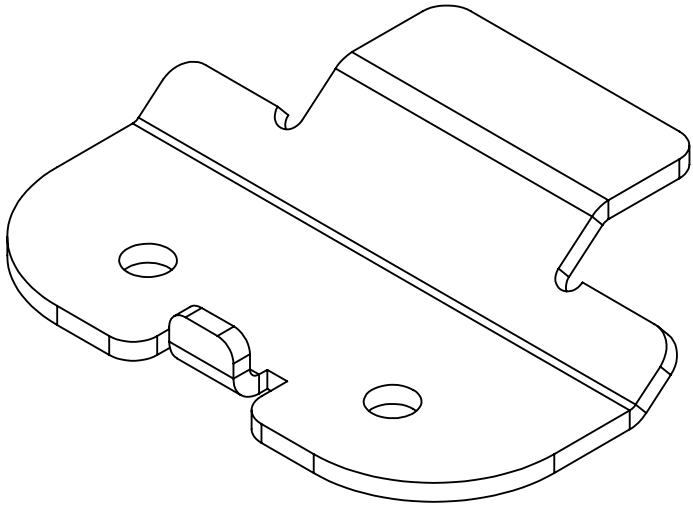

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
DO NOT SCALE DRAWING
TOLERANCES: SEE NOTES
THIRD ANGLE PROJECTION



NOVO CONFIDENTIAL
DO NOT DISTRIBUTE

DRAWN
A. UBACH

ENG
A. UBACH

CAD FILE
VX~02-10127

NOVO ENGINEERING®
San Diego, CA | Minneapolis, MN | novoengineering.com

DESCRIPTION
TOE KICK INNER

SIZE **B** DWG. NO. VX~02-10127 REV. X01

SCALE 3:2 SHEET 1 OF 1