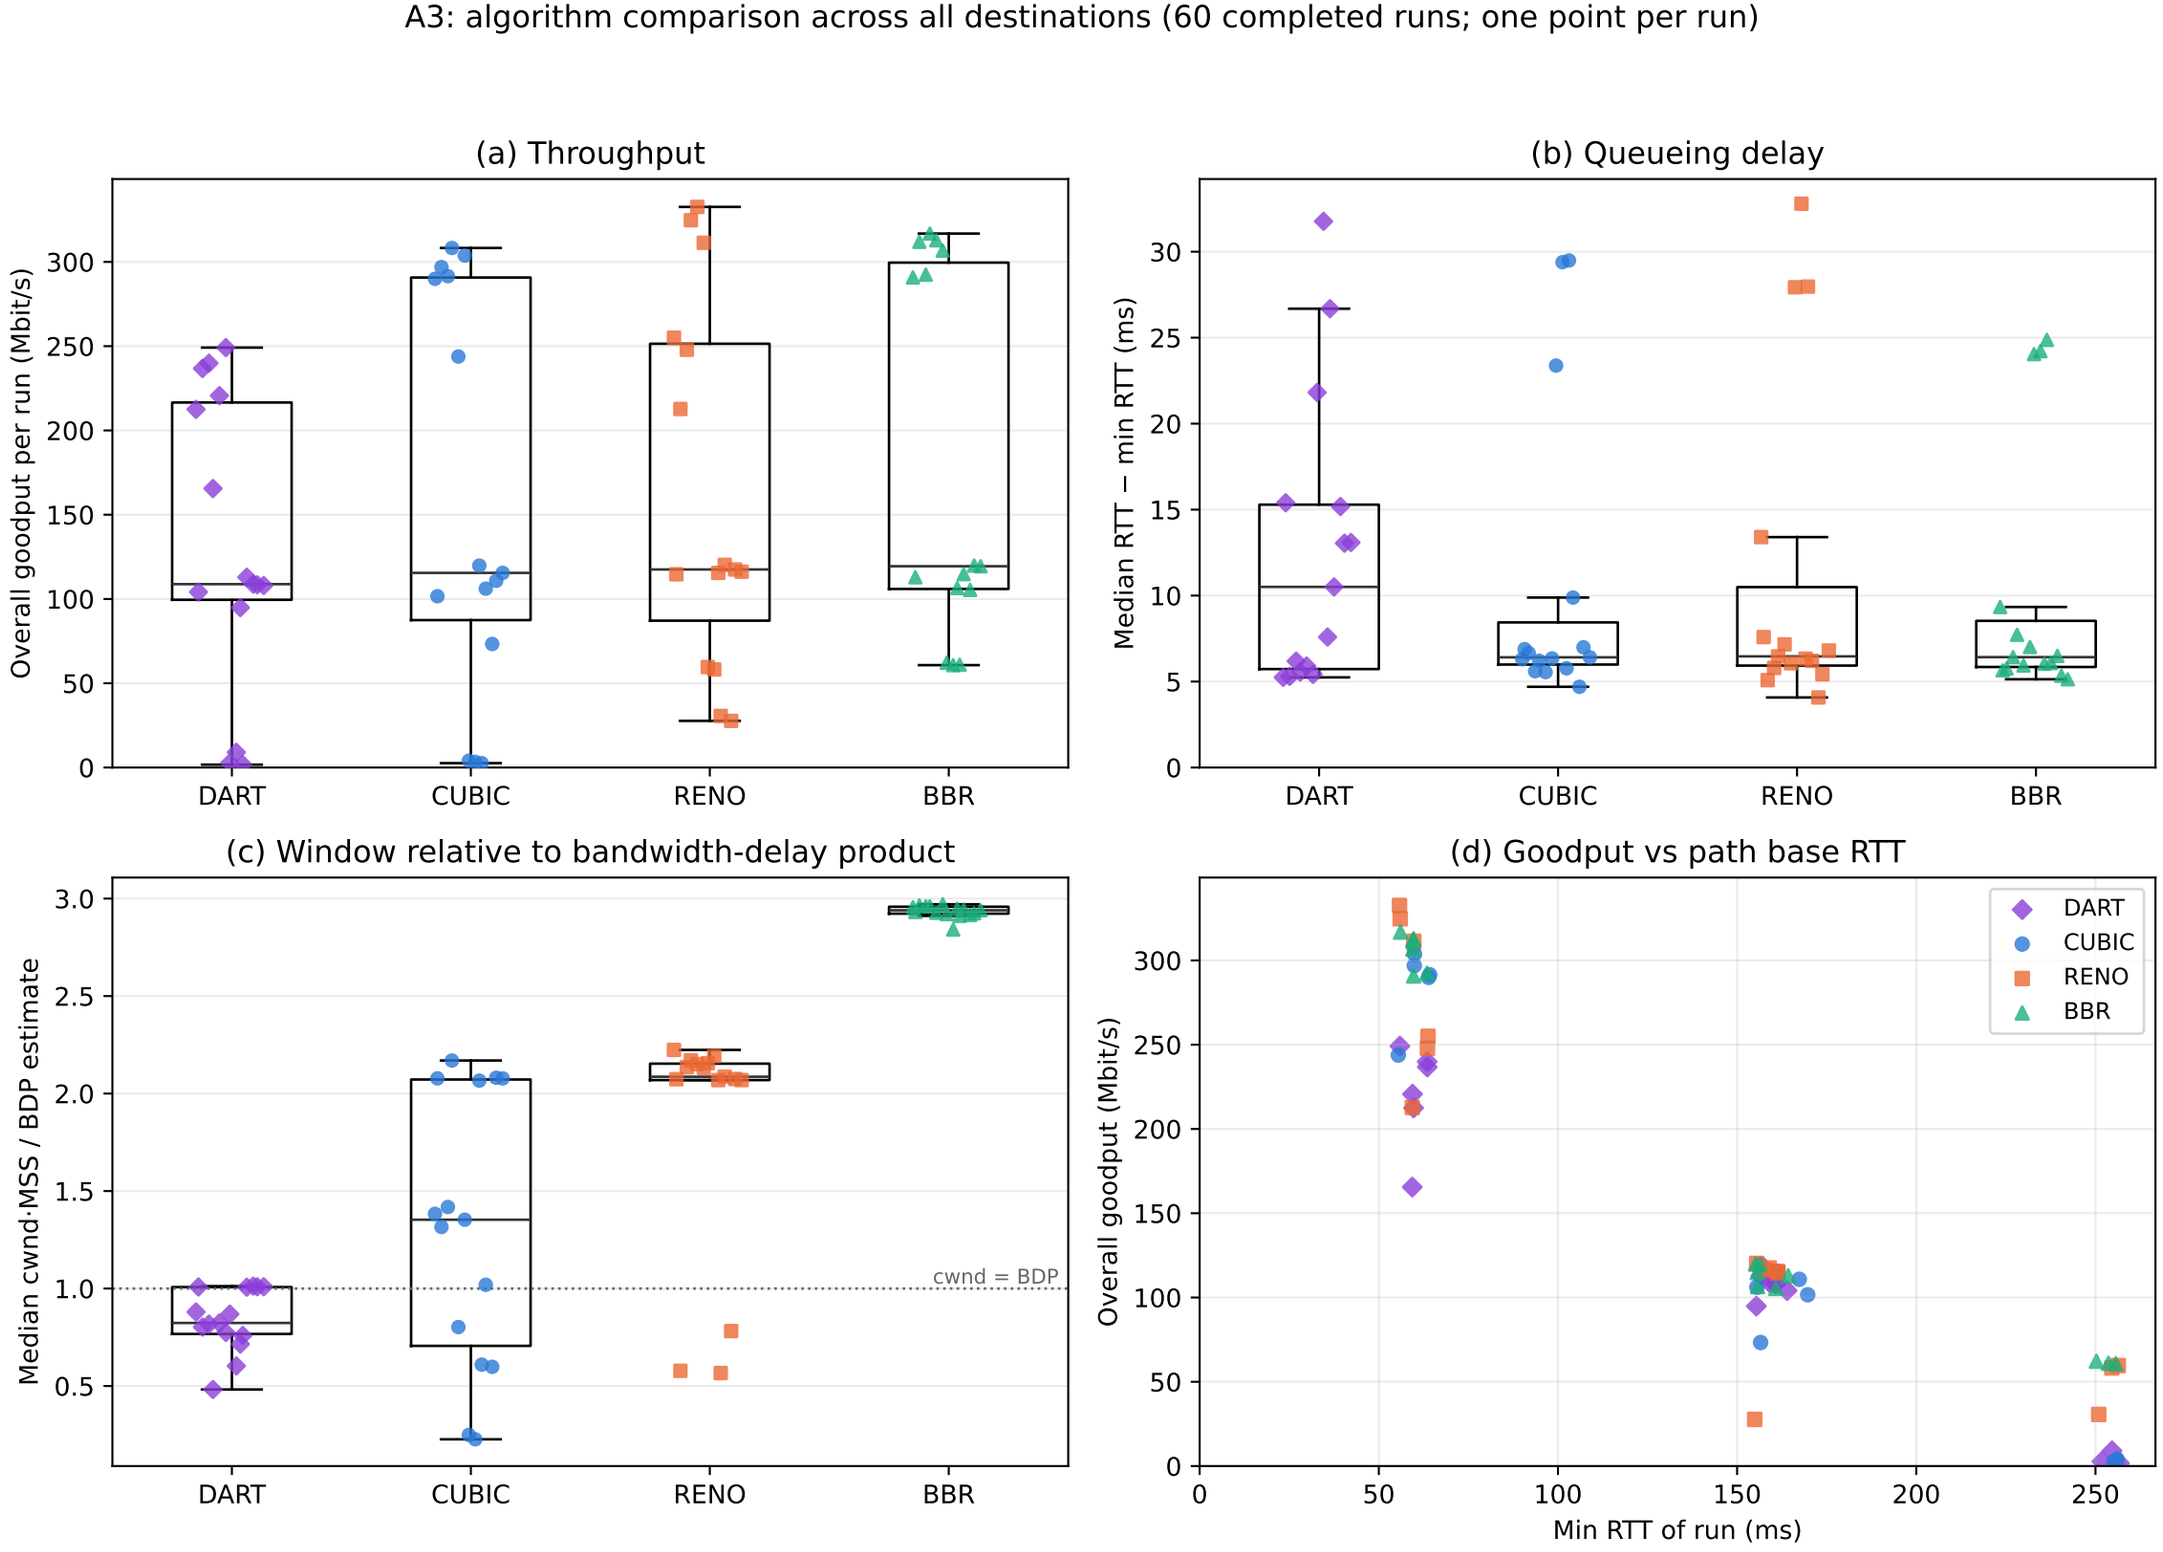
A3: algorithm comparison across all destinations (60 completed runs; one point per run)
(a) Throughput
Overall goodput per run (Mbit/s)
0
50
100
150
200
250
300
DART
CUBIC
RENO
BBR
(b) Queueing delay
Median RTT − min RTT (ms)
0
5
10
15
20
25
30
DART
CUBIC
RENO
BBR
(c) Window relative to bandwidth-delay product
Median cwnd·MSS / BDP estimate
0.5
1.0
1.5
2.0
2.5
3.0
cwnd = BDP
DART
CUBIC
RENO
BBR
(d) Goodput vs path base RTT
Overall goodput (Mbit/s)
0
50
100
150
200
250
300
Min RTT of run (ms)
0
50
100
150
200
250
DART
CUBIC
RENO
BBR
BDP estimate = max kernel delivery rate × min RTT. Public paths change between runs.