

PARTS REFERENCE

ITEM NO	DRAWING REFERENCE	DESCRIPTION	PART NUMBER	QUANTITY
1	F4,F10,F16,F18,F22,F27,F34,F36,F39,F44	DEC 7400N	IC 1905575	14
2	F4,F10,F16	DEC 7410N	IC 1905576	6
3	F4,F10,F25,F52,F54	DEC 7400N	IC 1905575	5
4	F4,F10,F31,F42,F52,F47,F49,F50	DEC 7400N	IC 1905575	4
5	F4,F6,F21,E61	DEC 8815A	IC 1905713	4
6	F4,F10,F17,F32,F33,F45,E53,E56	DEC 7402N	IC 1905004	8
7	F4,F23,F26,E57	DEC 7402N	IC 1905579	4
8	F9	DEC 7453N	IC 1905582	1
9	F11	DEC 7420N	IC 1905577	1
10	F14,F15,F38,F41,F43,F46,F48,F51	DEC 7460N	IC 1905581	8
11	F19	DEC 74H53N	IC 1905062	1
12	F20	DEC 74H02N	IC 1905056	1
12	F28,F29	DEC 7474N	IC 1905567	2
13	F31	DEC 7401N	IC 1905550	1
14	F35	DEC 74H30N	IC 1905059	1
15	F50	DEC 74H40N	IC 1905056	1
16	C1-C54	01 MFD 100V 20 %	CAP 1001610	54
17	C55-C58	6.8 MFD 35V 20 %	CAP 0000067	4
18	C59	270 MMF 100V 5 %	CAP 1000022	1
19	C60,C61,C62	330 MMF 100V 5 %	CAP 1000023	3
20	R1	1000 OHMS 1/4W 5 %	RES 1300065	1
21	R2	47 OHMS 1/4W 5 %	RES 1300202	1
22	R3,R5	470 OHMS 1/4W 5 %	RES 1300316	2
23	R4,R6,R8	220 OHMS 1/4W 5 %	RES 1300271	3
24	R7	560 OHMS 1/4W 5 %	RES 1301530	1
25	D1,D2,D3	D664 DIODE	1100114	3


NOTES:

1. PIN NOTATION THROUGHOUT IS ORDERED UPON MODULE PLACEMENT IN THE KAI PROCESSOR. MODULE REFERENCE ALONE IS OBTAINED BY DELETING THE NUMBER (SLOT LOCATION) AFTER THE FIRST LETTER, AND CONVERTING THE FIRST LETTER ACCORDING TO THE PIN NOMENCLATURE CHART AT RIGHT.
2. ALL SIGNALS THAT HAVE MODULE PINS ARE SO NOTED; MULTIPLE NOTATIONS OF THE SAME SIGNALS WITHIN A MODULE HAVE THE PIN NOTED ON EACH. AN INPUT SIGNAL IS NOTED ONLY ONCE PER SHEET UNLESS SEPARATE PINS ARE USED; MULTIPLE INPUTS ARE CONNECTED. MODULE OUTPUT SIGNALS ARE BROUGHT TO THE EXTREME RIGHT OF EACH SHEET.
3. PROCESSOR SIGNAL SOURCE NOTATION (KIO-2, FOR EXAMPLE) IDENTIFIES THE SIGNAL SOURCE (PRINT AND MODULE). THE FIRST NUMBER AFTER THE K INDICATES THE MODULE PRINT SET, WHILE THE SECOND INDICATES THE SHEET WITHIN THE SET. IF ON A PRINT, THE FIRST NUMBER OF THE K PREFIXES COINCIDE FOR A SIGNAL NAME AND THE PRINT (SEE TITLE BLOCK), THE SIGNAL IS GENERATED ON THE MODULE. A DIFFERENCE IN THE FIRST NUMBER OF THE K PREFIXES INDICATES A SIGNAL GENERATED OFF THE MODULE. SIGNALS WITH A "BUS" PREFIX REPRESENT A "WIRED OR" SITUATION, AND MULTIPLE SOURCES FOR THE SIGNAL CAN EXIST.
4. DETAILS ON COMPONENTS ARE NOTED IN THE PARTS REFERENCE PLACEMENT IS NOTED IN THE COMPONENT PLACEMENT DIAGRAM.
5. GND AND +5V ARE USUALLY PIN 7 AND PIN 14, RESPECTIVELY. EXCEPTIONS ARE:

IC TYPE	GND	+5V
DEC 7481	PIN 10	PIN 4
DEC 7482	PIN 11	PIN 4
8251	PIN 8	PIN 16
DEC 8271	PIN 8	PIN 16
DEC 380	PIN 1	PIN 8
DEC 384	PIN 1	PIN 8


6. UNLESS OTHERWISE NOTED: RESISTANCE IS IN OHMS;
CAPACITANCE IS IN PICO FARADS. CAPACITORS WITHOUT
ANY NOTED VALUES ARE .01 MFD.

COMPONENT PLACEMENT.

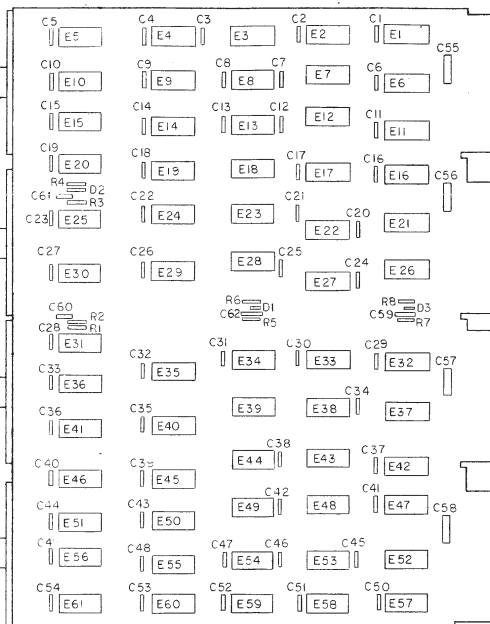


PIN NOMENCLATURE

MODULE	PROCESSOR
--------	-----------

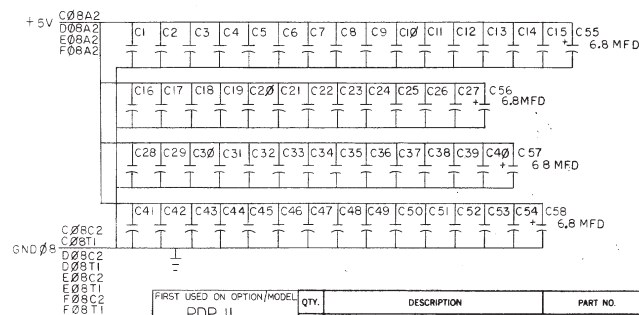



FIRST USED ON OPTION/MODEL		QTY.	DESCRIPTION	PART NO.	ITEM NO.
PDP II					
UNLESS OTHERWISE SPECIFIED		DRN	PARTS LIST		
UNLESS OTHERWISE SPECIFIED		DATE	digital EQUIPMENT CORPORATION		
DIMENSION IN INCHES		DATE	MAYNARD, MASSACHUSETTS		
TOLERANCES		DATE			
DECIMALS FRACTIONS ANGLES		DATE			
= .005 = 1/64 = 0°30'		DATE			
FINISH SURFACE QUALITY		DATE			
REMOVE BURRS AND BREAK SHARP CORNERS		DATE			
MATERIAL		DATE	TITLE		
//		DATE	DATA PATH CNTL		
NXT HIGHER ASSY		DATE	M820		
A-MIL-KAL-0		DATE	K6-0		
SCALE		DATE	SIZE CODE		
SHEET		DATE	NUMBER		
OF 5		DATE	REV		
ETCH REV		DATE	B		
DIST.		DATE	1		
PINK		DATE			

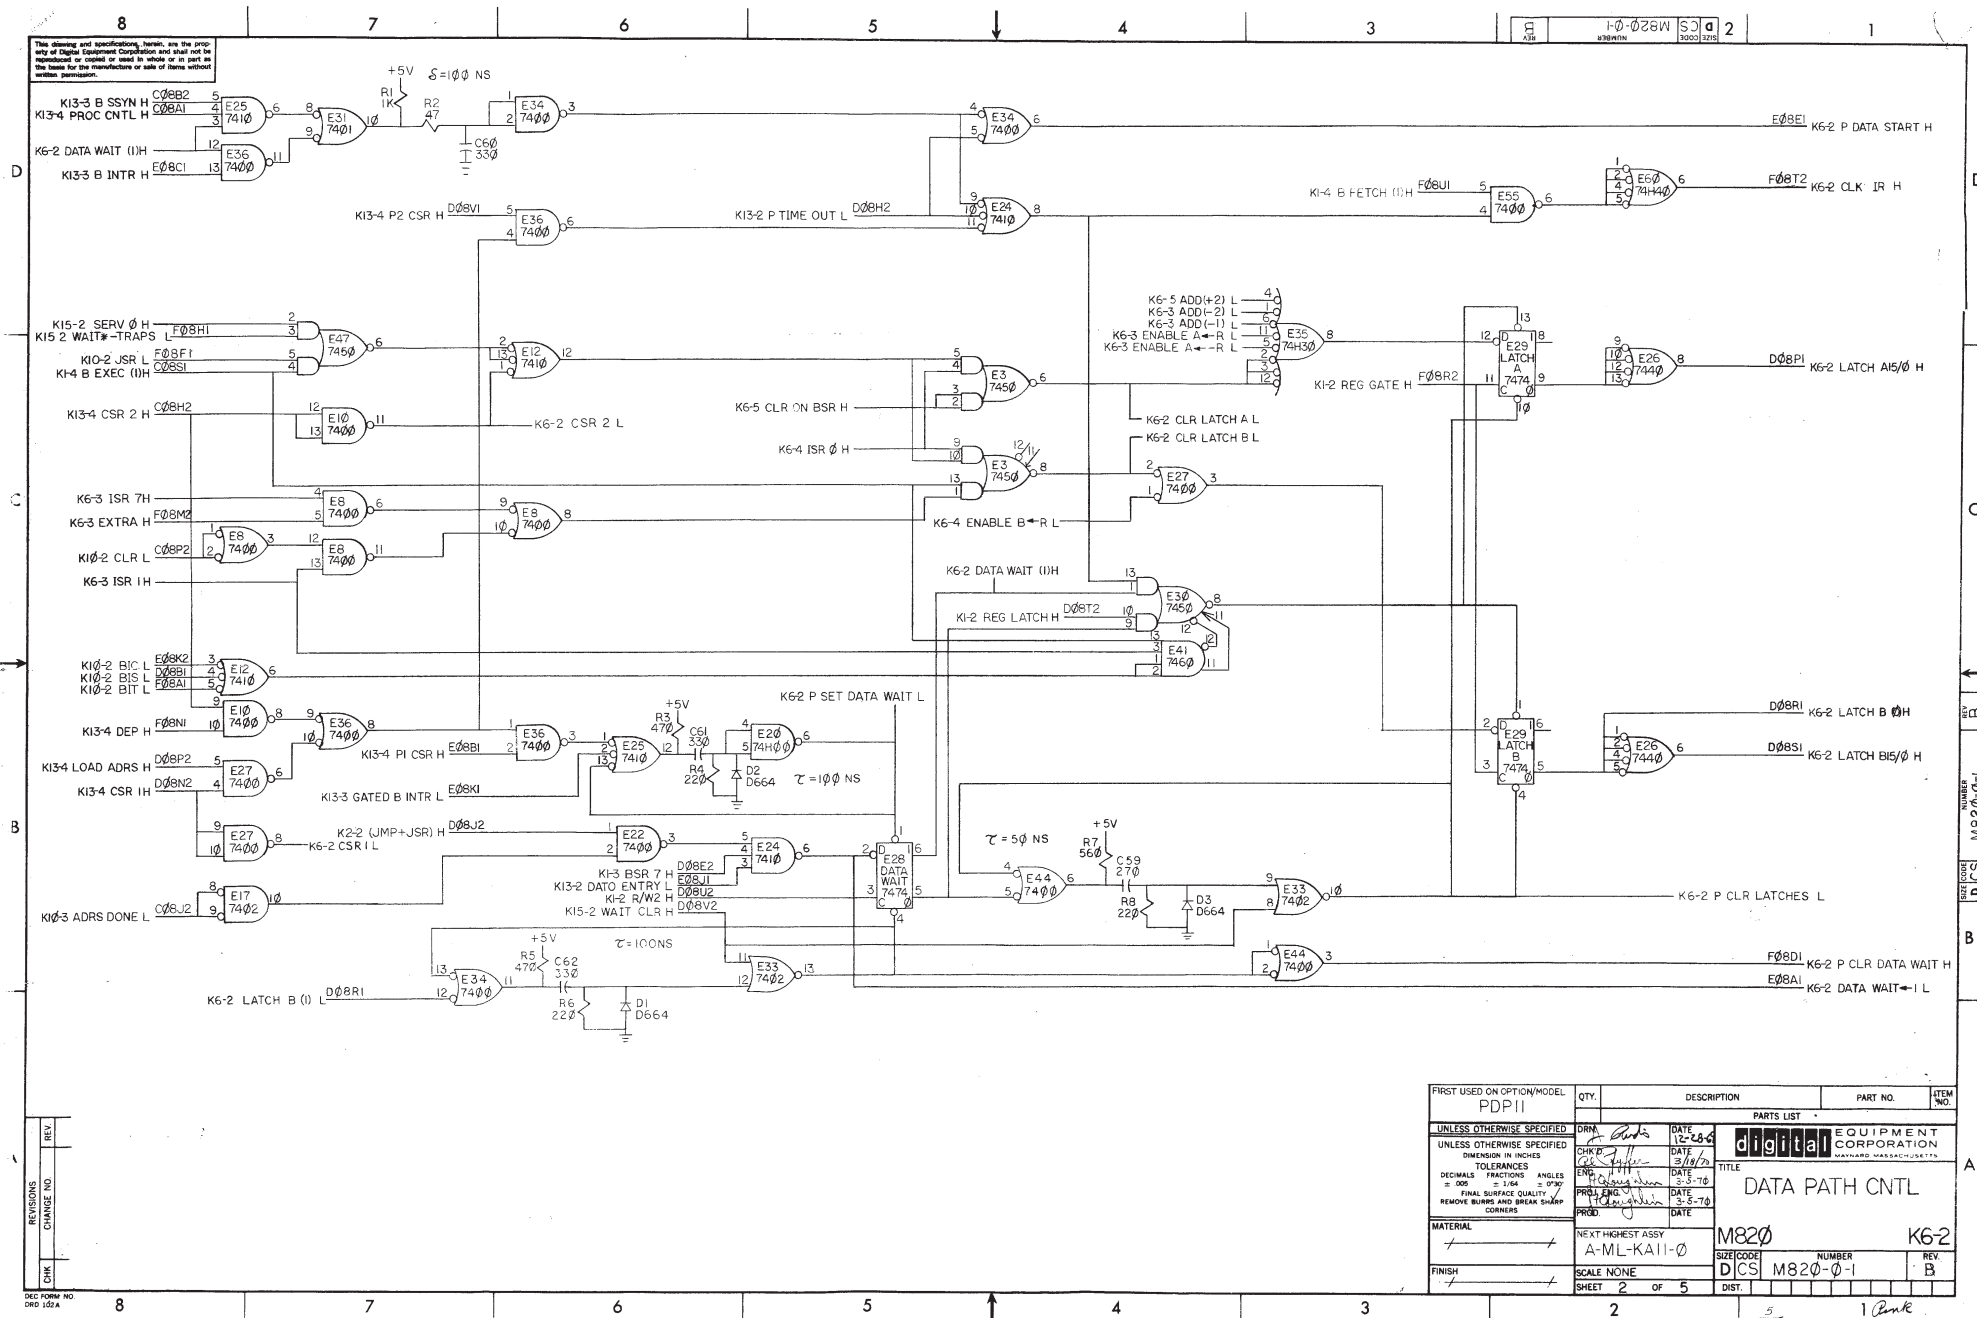



FIRST USED ON OPTION MODEL		QTY.	DESCRIPTION	PART NO.	ITEM NO.
PDPII			PARTS LIST		
UNLESS OTHERWISE SPECIFIED		DRN.	DATE		
UNLESS OTHERWISE SPECIFIED		 C. [Signature] 3/19/74	3/19/74	EQUIPMENT CORPORATION NATYARD, MASSACHUSETTS	
DIMENSION IN INCHES		END DATE	DATE	TITLE	
TOLERANCES		3/19/74	3/19/74	DATA PATH CNTL	
DECIMALS FRACTIONS ANGLES		3/19/74	3-5-74		
= .005 1/16 = 90°		PROD. ENG.	DATE		
FINAL SURFACE QUALITY		3/19/74	DATE		
REMOVE BURRS AND BREAK SHARP CORNERS		PROD.			
MATERIAL		NEXT HIGHER ASSY		K6-3	
		A-ML-KAII-10			
FINISH		SCALE NONE		REV	
		SHEET 3 OF 5		B	
		DIST.			
		SIZE CODE		NUMBER	
		DCS M820-0-1			

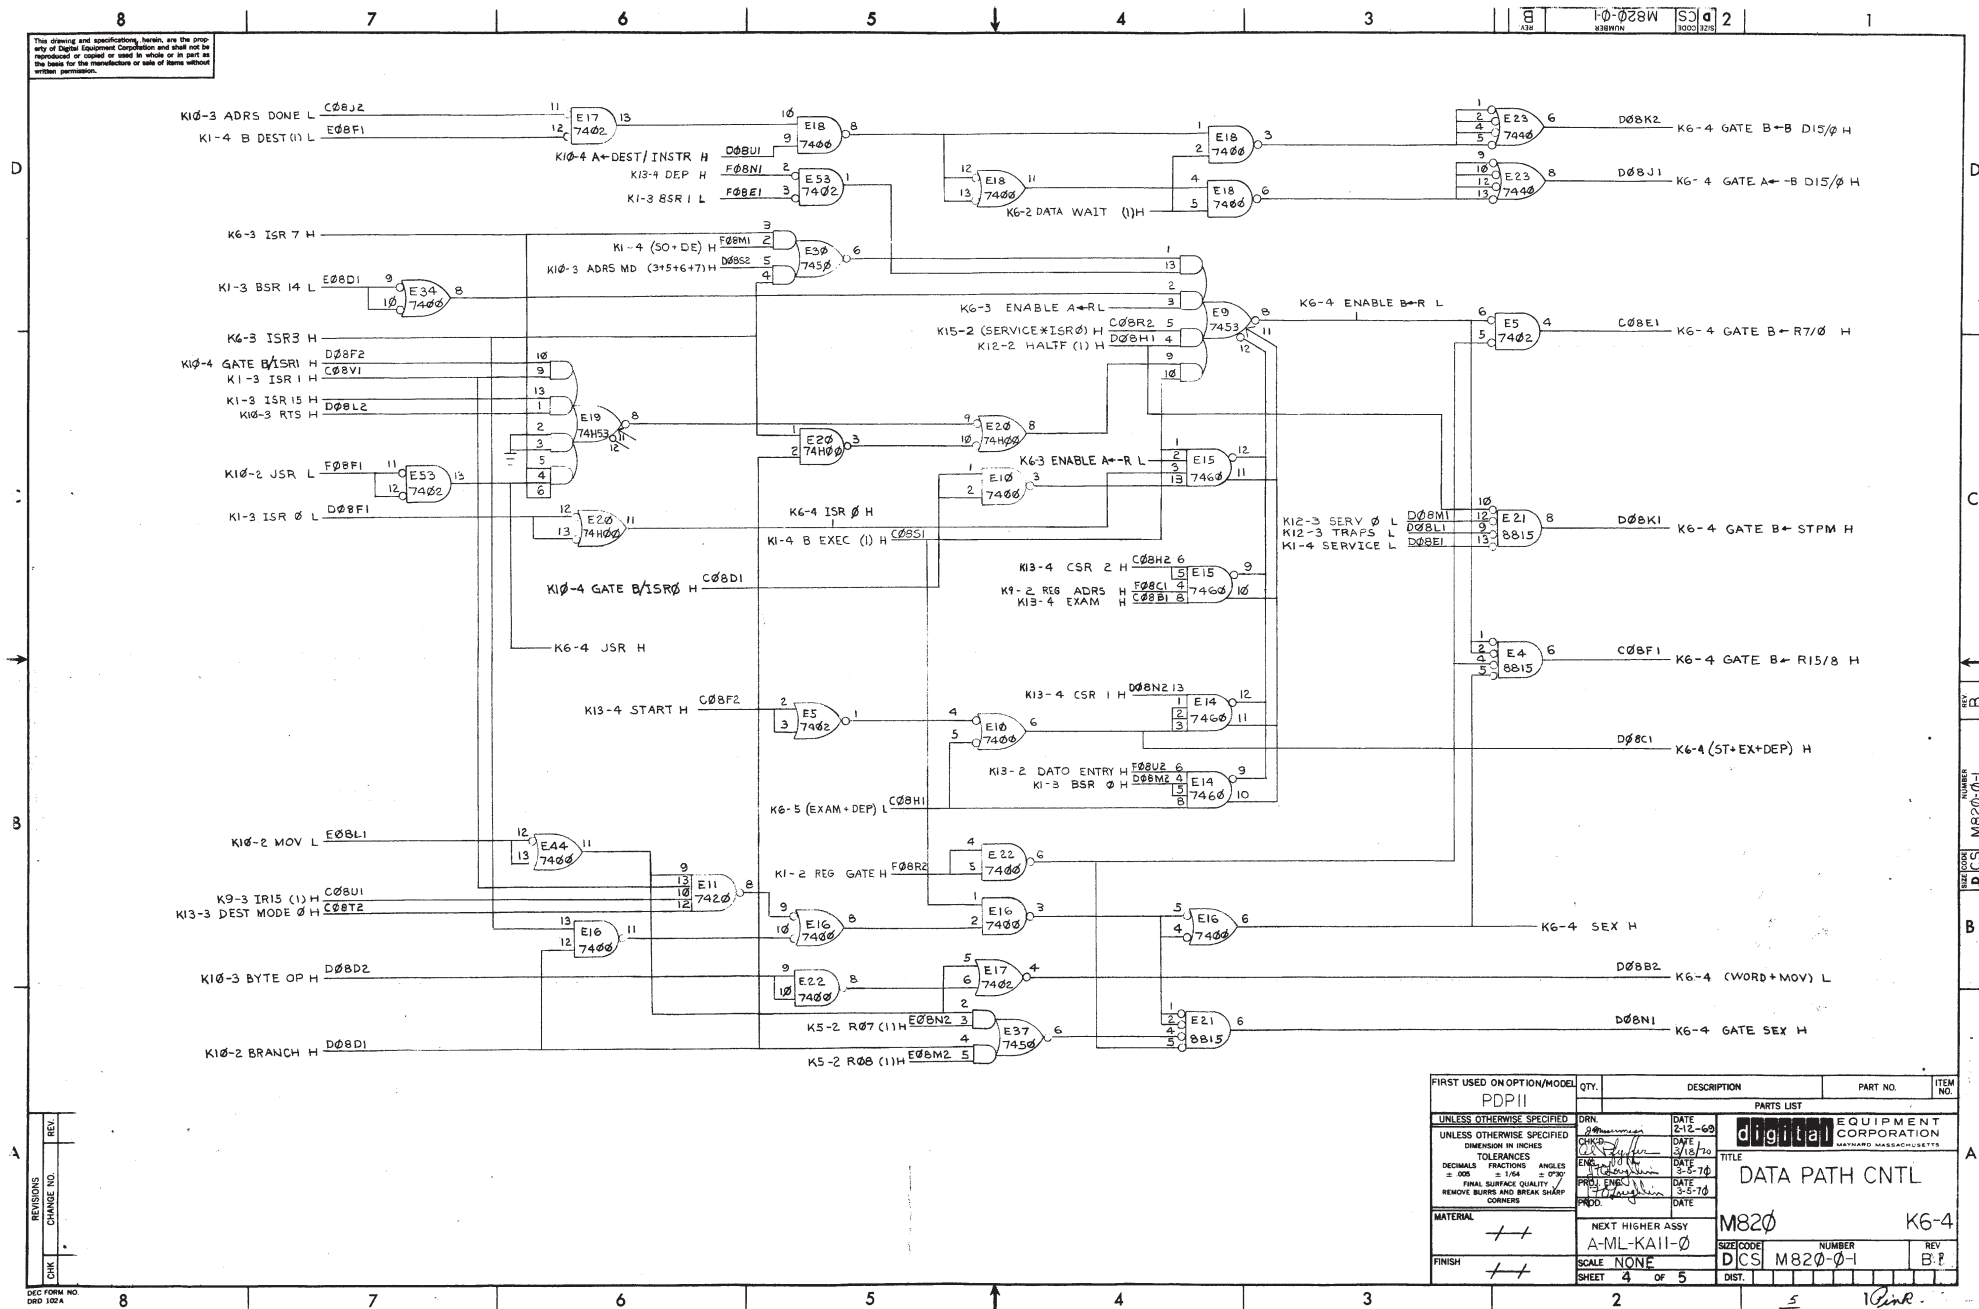

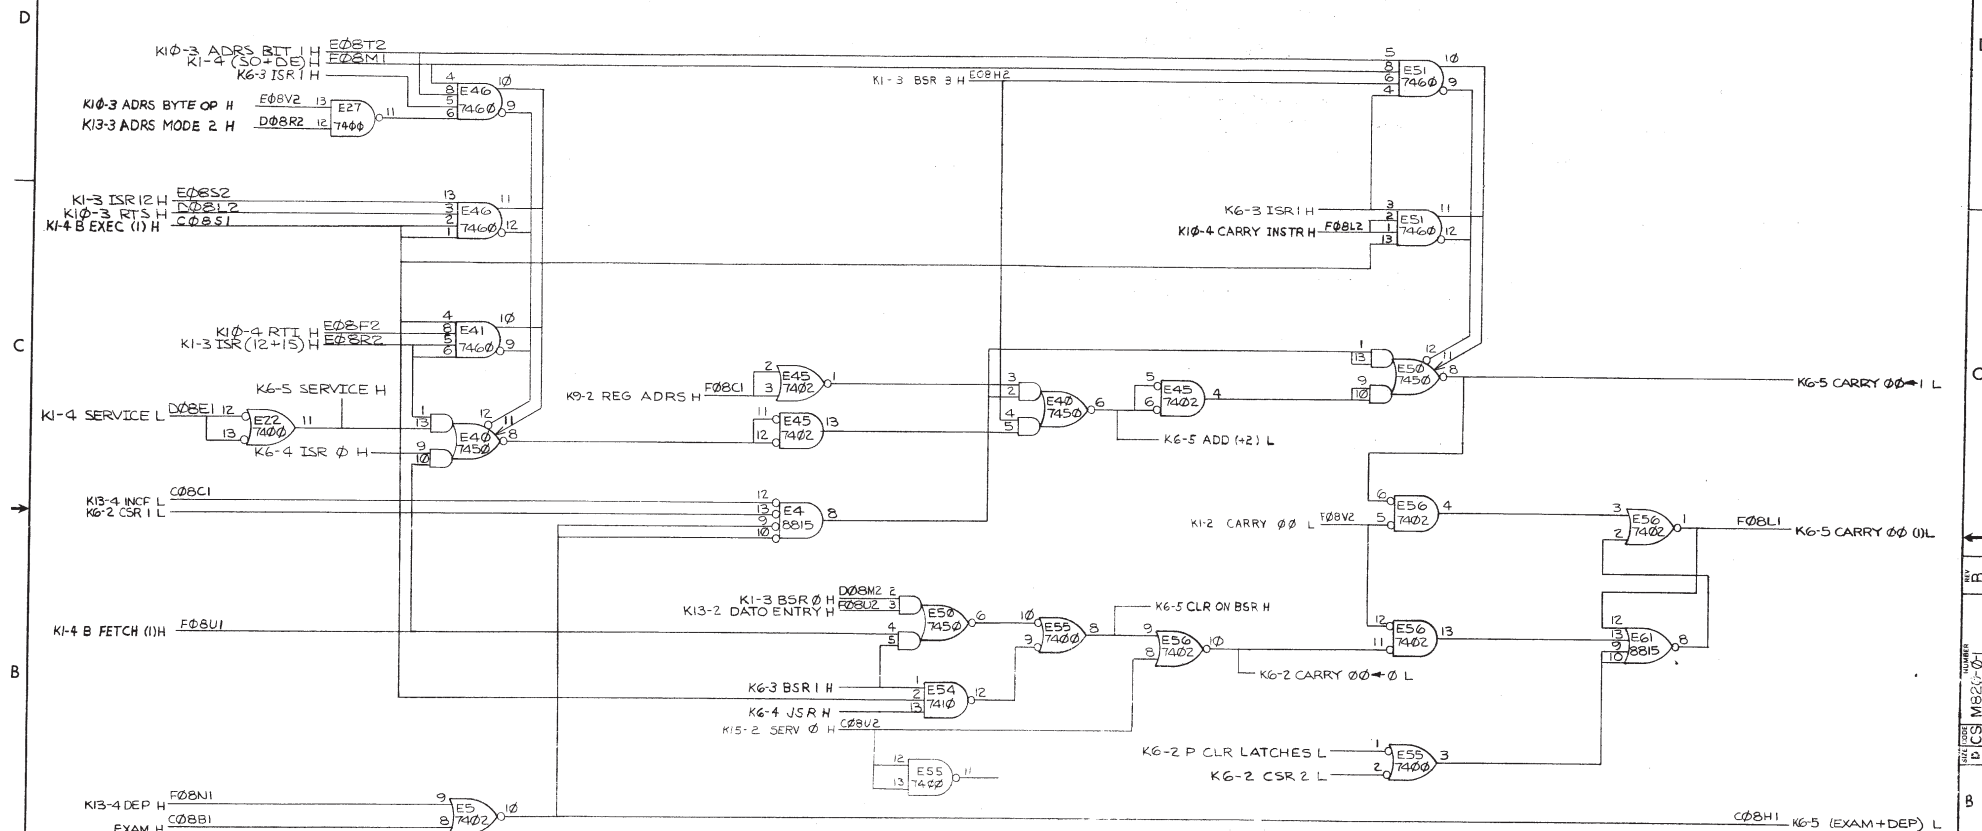

FIRST USED ON OPTION MODEL		QTY.	DESCRIPTION	PART NO.	ITEM NO.
PDP11					
UNLESS OTHERWISE SPECIFIED		DRN.	PARTS LIST		
UNLESS OTHERWISE SPECIFIED		DATE	TITLE		
DIMENSIONS IN INCHES		12-3-76	DIGITAL CORPORATION		
TOLERANCES		QTY.	EQUIPMENT		
DECIMALS FRACTIONS ANGLES		DATE	CORPORATION		
= .005 = 1/64 = 0°00'		3-5-76	NATURAL SURFACE PLACES		
FINAL SURFACE QUALITY		PROG. ENG.			
REMOVE BURRS AND BREAK SHARP CORNERS		DATE			
		PROD.			
MATERIAL		DATA PATH CNTL			
+		M820			
+		K6-5			
+		M820			
+		K6-5			
FINISH		SIZE CODE NUMBER REV			
+		DCS M820-0-1 B			
+		SCALE NONE			
+		SHEET 5 OF 5			
		DIST.			