

PARTS REFERENCE

ITEM NO.	DRAWING REFERENCE	DESCRIPTION	PART NUMBER	QUANTITY
1	E1E6,E21	DEC 888	IC 1909765	3
2	E2,E7	DEC 74H00N	IC 1909056	2
3	E3,E9,E18	DEC 7402N	IC 1909004	3
4	E2,E8	DEC 74H120N	IC 1909052	2
5	E6	DEC 74H10N	IC 1909057	1
6	E10	DEC 7450N	IC 1909550	1
7	E11,E17,E22,E25	DEC 380	IC 1909485	4
8	E12,E13,E14,E19	DEC 74H74N	IC 1909567	4
9	E15	DEC 74H50N	IC 1909560	1
10	E23	DEC 7410N	IC 1909576	1
11	E24	DEC 7400N	IC 1909575	1
12	C1-C24	201 MF, 100V, 20%	CAP 100500	24
13	C25,C26	6.8 MF, 35V, 20%	CAP 100057	2
14	E20	DEC 7474N	IC 1909547	1


NOTES:

- PIN NOTATION THROUGHOUT IS ORDERED UPON MODULE PLACEMENT IN THE KAI1 PROCESSOR. MODULE REFERENCE ALONE IS OBTAINED BY DELETING THE NUMBER (SLOT LOCATION) AFTER THE FIRST LETTER, AND CONVERTING THE FIRST LETTER ACCORDING TO THE PIN NOMENCLATURE CHART AT RIGHT.
- ALL SIGNALS THAT HAVE MODULE PINS ARE SO NOTED: MULTIPLE NOTATIONS OF THE SAME SIGNALS WITHIN A MODULE HAVE THE PIN NOTED ON EACH. AN INPUT SIGNAL IS NOTED ONLY ONCE PER SHEET UNLESS SEPERATE PINS ARE USED; MULTIPLE INPUTS ARE CONNECTED. MODULE OUTPUT SIGNALS ARE BROUGHT TO THE EXTREME RIGHT OF EACH SHEET.
- PROCESSOR SIGNAL SOURCE NOTATION (K10-2, FOR EXAMPLE) IDENTIFIES THE SIGNAL SOURCE (PRINT AND MODULE). THE FIRST NUMBER AFTER THE K INDICATES THE MODULE PRINT SET, WHILE THE SECOND INDICATES THE SHEET WITHIN THE SET. IF ON A PRINT, THE FIRST NUMBER OF THE K PREFIXES COINCIDE FOR A SIGNAL NAME AND THE PRINT (SEE TITLE BLOCK), THE SIGNAL IS GENERATED ON THE MODULE. A DIFFERENCE IN THE FIRST NUMBER OF THE K PREFIXES INDICATES A SIGNAL GENERATED OFF THE MODULE. SIGNALS WITH A "BUS" PREFIX REPRESENT A "WIRED OR" SITUATION, AND MULTIPLE SOURCES FOR THE SIGNAL CAN EXIST.
- DETAILS ON COMPONENTS ARE NOTED IN THE PARTS REFERENCE PLACEMENT IS NOTED IN THE COMPONENT PLACEMENT DIAGRAM.
- GND AND +5V ARE USUALLY PIN 7 AND PIN 14, RESPECTIVELY. EXCEPTIONS ARE:

IC TYPE	GND	+5V
DEC 7491	PIN 10	PIN 4
DEC 7482	PIN 11	PIN 4
8251	PIN 8	PIN 16
DEC 8271	PIN 8	PIN 16
DEC 380	PIN 1	PIN 8
DEC 384	PIN 1	PIN 8

- 6 UNLESS OTHERWISE NOTED: RESISTANCE IS IN OHMS; CAPACITANCE IS IN PICOFARADS. CAPACITORS WITHOUT ANY NOTED VALUES ARE .01 MFD.

COMPONENT PLACEMENT

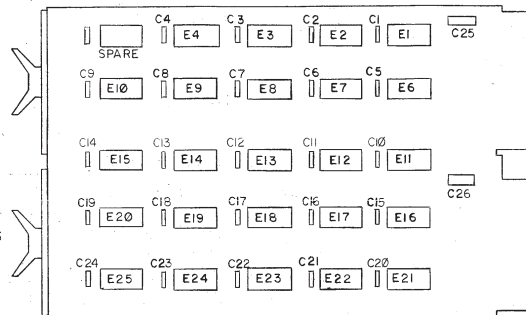


PIN NOMENCLATURE

MODULE PROCESSOR


A C

B D

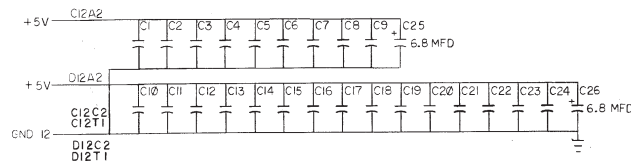

FIRST USED ON OPTION/MODEL PDP 11	QTY.	DESCRIPTION	PART NO.	ITEM NO.
UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES DECIMALS FRACTIONS ANGLES ± .005 ± .004 ± .030 FINAL SURFACE QUALITY REMOVE BURRS AND BREAK SHARP CORNERS	DATE 3/10/70 DATE 3/6/70 DATE 3-6-74 DATE 3-6-74	DATE 3/10/70 DATE 3/6/70 DATE 3-6-74 DATE 3-6-74	DATE 3/10/70 DATE 3/6/70 DATE 3-6-74 DATE 3-6-74	DATE 3/10/70 DATE 3/6/70 DATE 3-6-74 DATE 3-6-74
MATERIAL FINISH	NEXT HIGHER ASSY A-ML-KAI1-0	SCALE SHEET 1 OF 3	DATE 3/10/70	DATE 3/10/70
PARTS LIST		TITLE M824 K3-1		
digital EQUIPMENT CORPORATION MAYNARD, MASSACHUSETTS		PRIORITY		
M824		K3-1		
DCS M824-0-1		REV. C		
DIST.		1 Pink Ben		

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

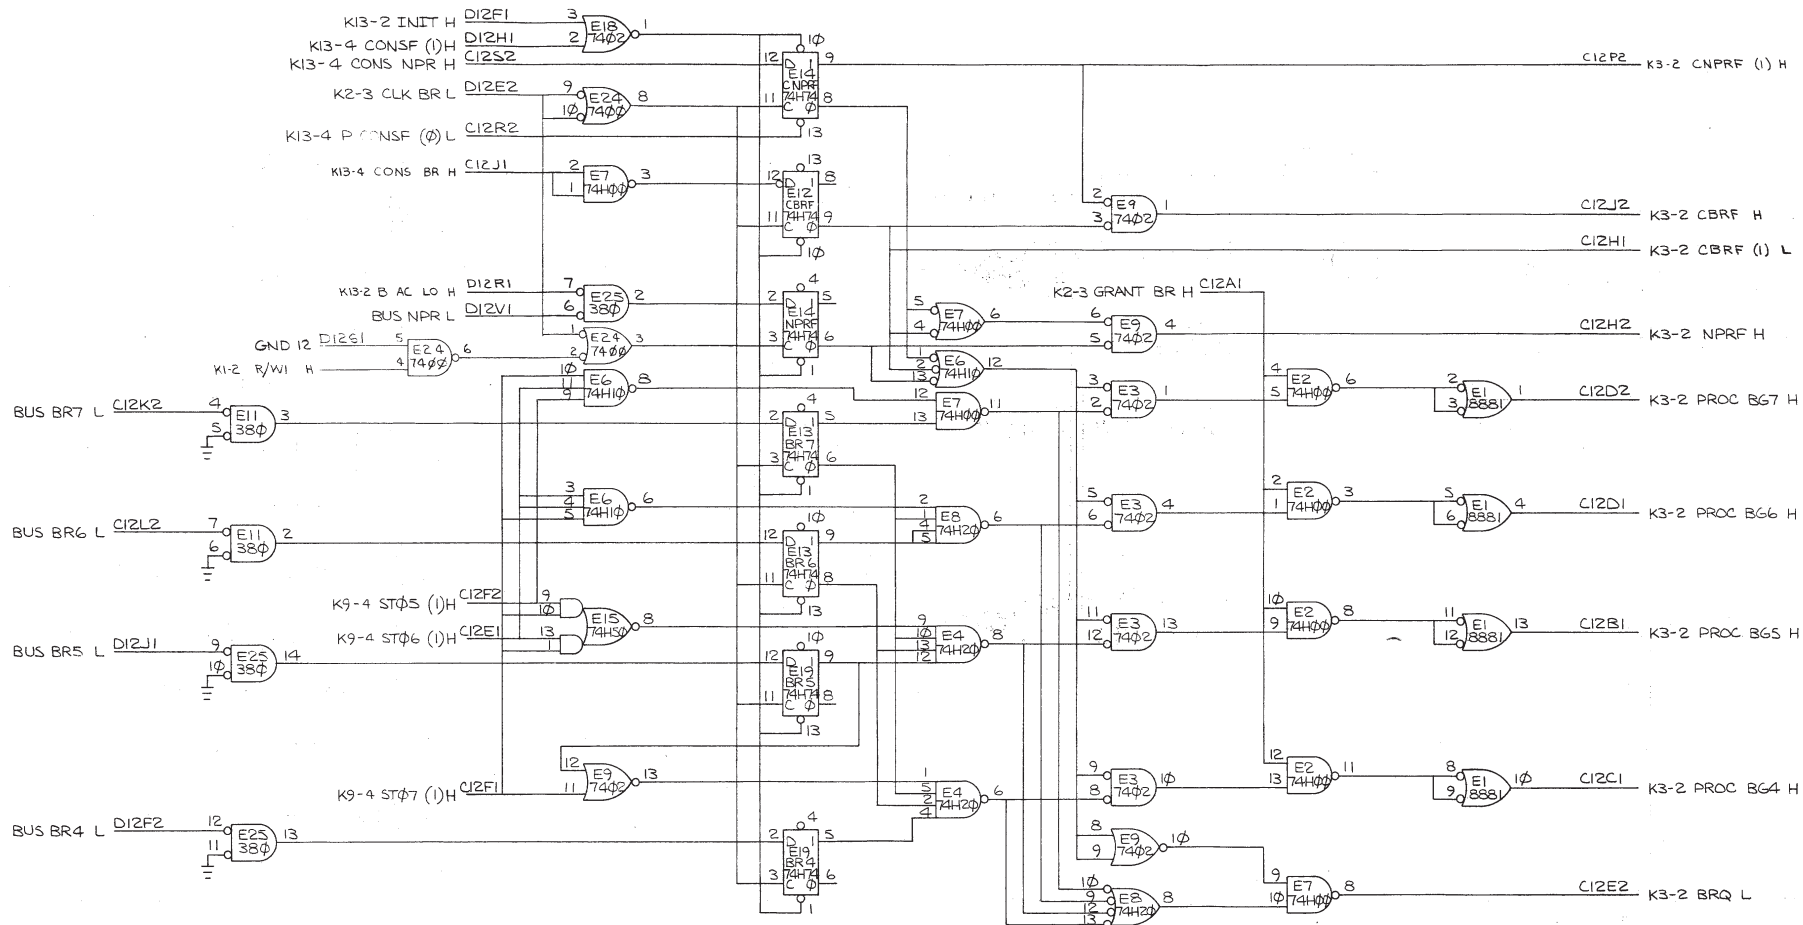

FIRST USED ON OPTION MODEL		QTY.	DESCRIPTION	PART NO.	ITEM NO.
PDPII					
UNLESS OTHERWISE SPECIFIED		PARTS LIST			
UNLESS OTHERWISE SPECIFIED		digital EQUIPMENT CORPORATION			
DIMENSIONS IN INCHES		MAYNARD, MASSACHUSETTS			
TOLERANCES		DATE 12-9-69			
DECIMALS FRACTIONS ANGLES		DATE 3/18/70			
± .005 ± 1/64 ± .030		DATE 5-5-70			
FINAL SURFACE QUALITY		DATE 5-5-70			
REMOVE BURRS AND BREAK SHARP CORNERS		DATE			
MATERIAL		NEXT HIGHER ASSY			
+ +		A-ML-KA11-0			
FINISH		SCALE NONE			
+ +		D/C S M824-01			
SHEET 2 OF 3		REV. C			

REVISIONS
CHANGE NO.
CHK

DEC FORM NO. 102-A

A

B

C

D

8

7

6

5

4

3

2

1

C

C

D

8

7

6

5

4

3

2

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261


262

263

264

265

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

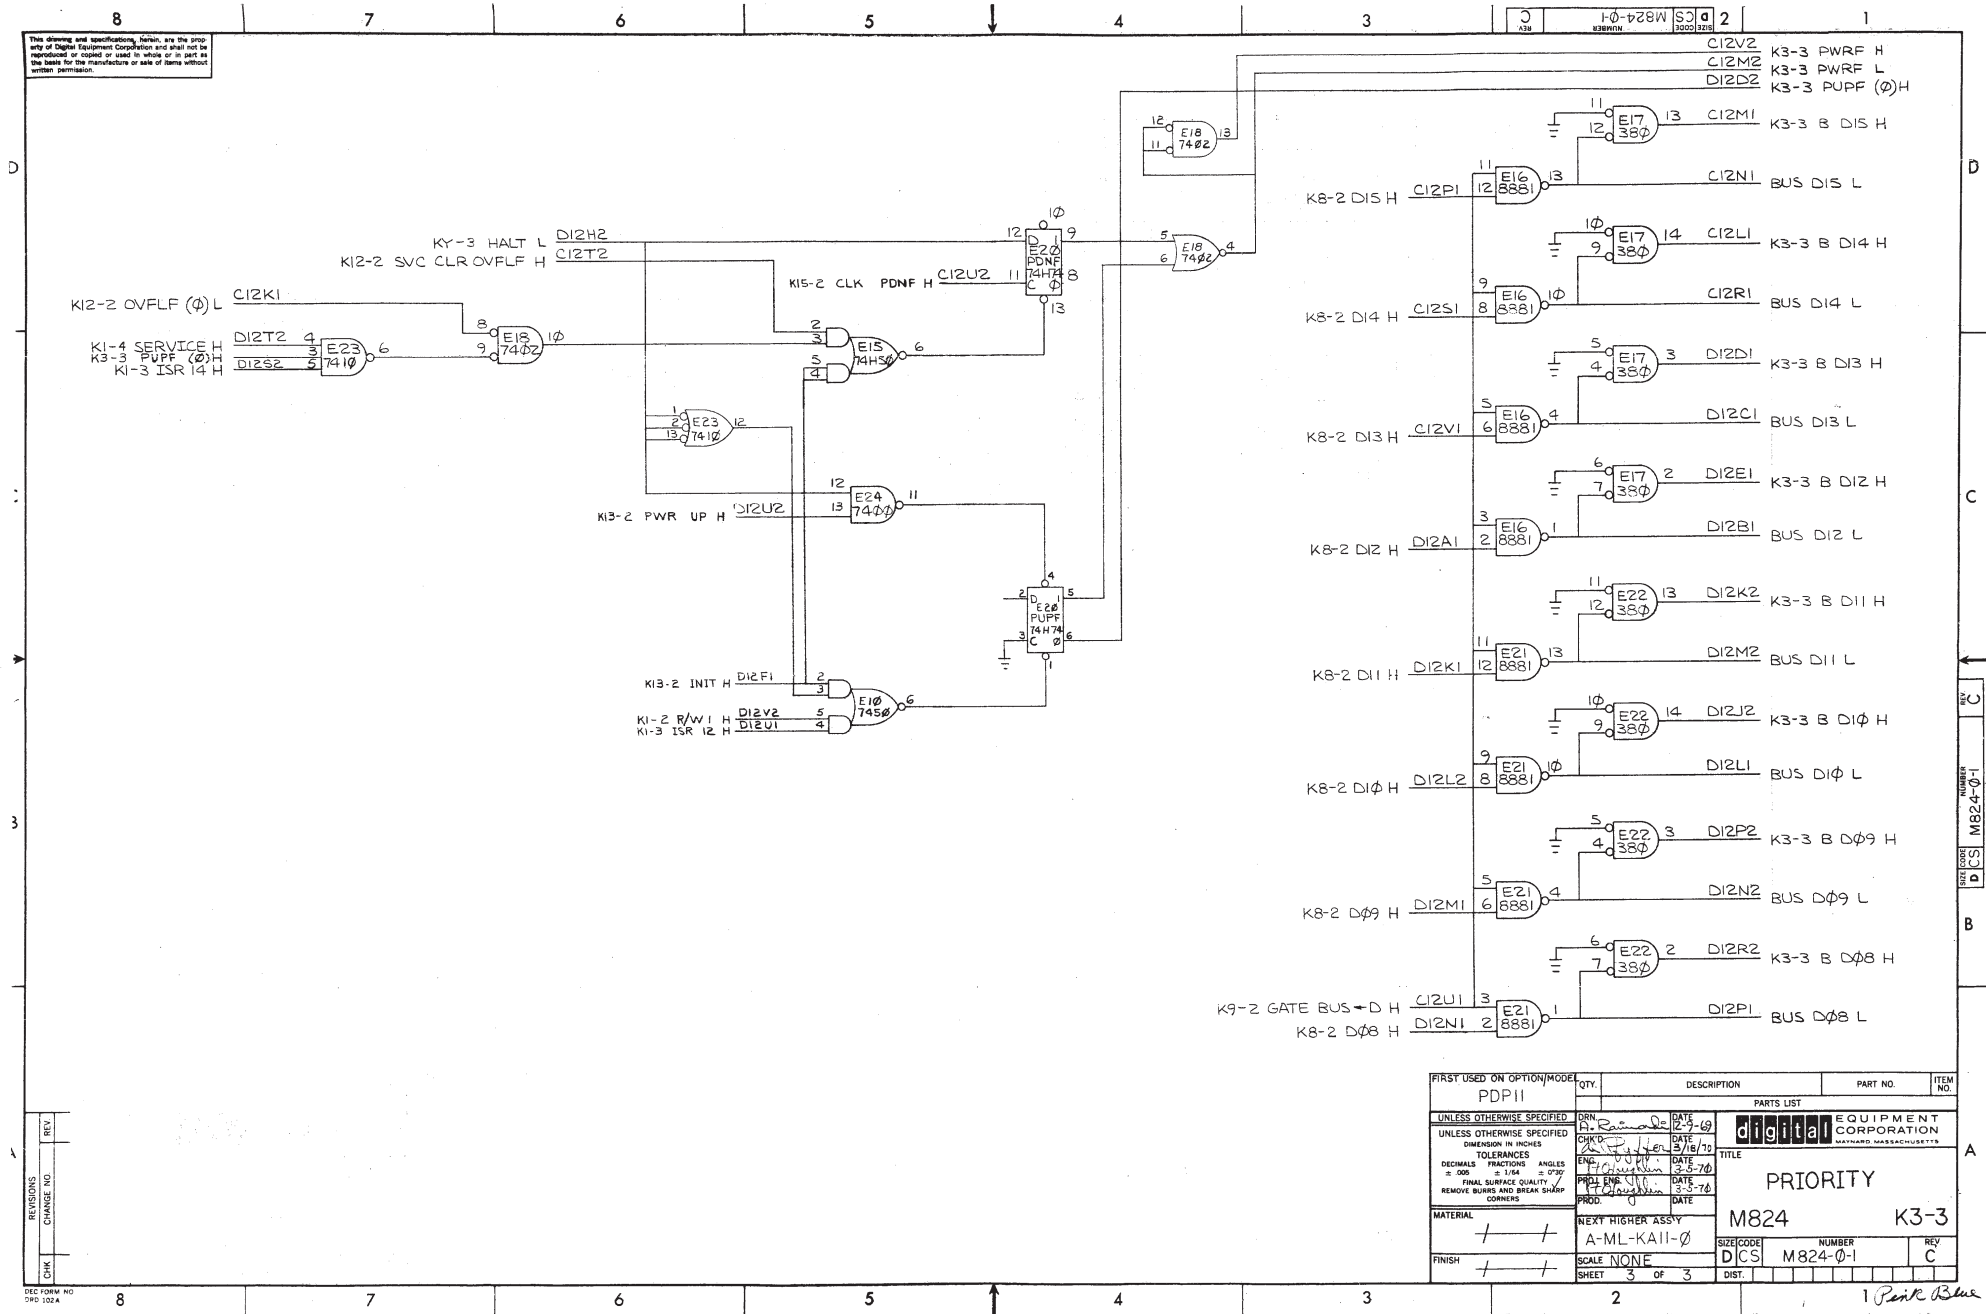

FIRST USED ON OPTION/MODEL		QTY.	DESCRIPTION	PART NO.	ITEM NO.
PDP11					
UNLESS OTHERWISE SPECIFIED		PARTS LIST			
UNLESS OTHERWISE SPECIFIED		EQUIPMENT CORPORATION MAYNARD, MASSACHUSETTS			
DIMENSION IN INCHES		TITLE			
TOLERANCES		M824 K3-3			
DECIMALS FRACTIONS ANGLES		SIZE CODE NUMBER REV			
± .005 ± 1/64 ± 0°30'		DCS M824-0-1 C			
FINAL SURFACE QUALITY		SHEET 3 OF 3			
REMOVE BURRS AND BREAK SHARP CORNERS		DIST.			
MATERIAL		NEXT HIGHER ASSY			
FINISH		SCALE NONE			