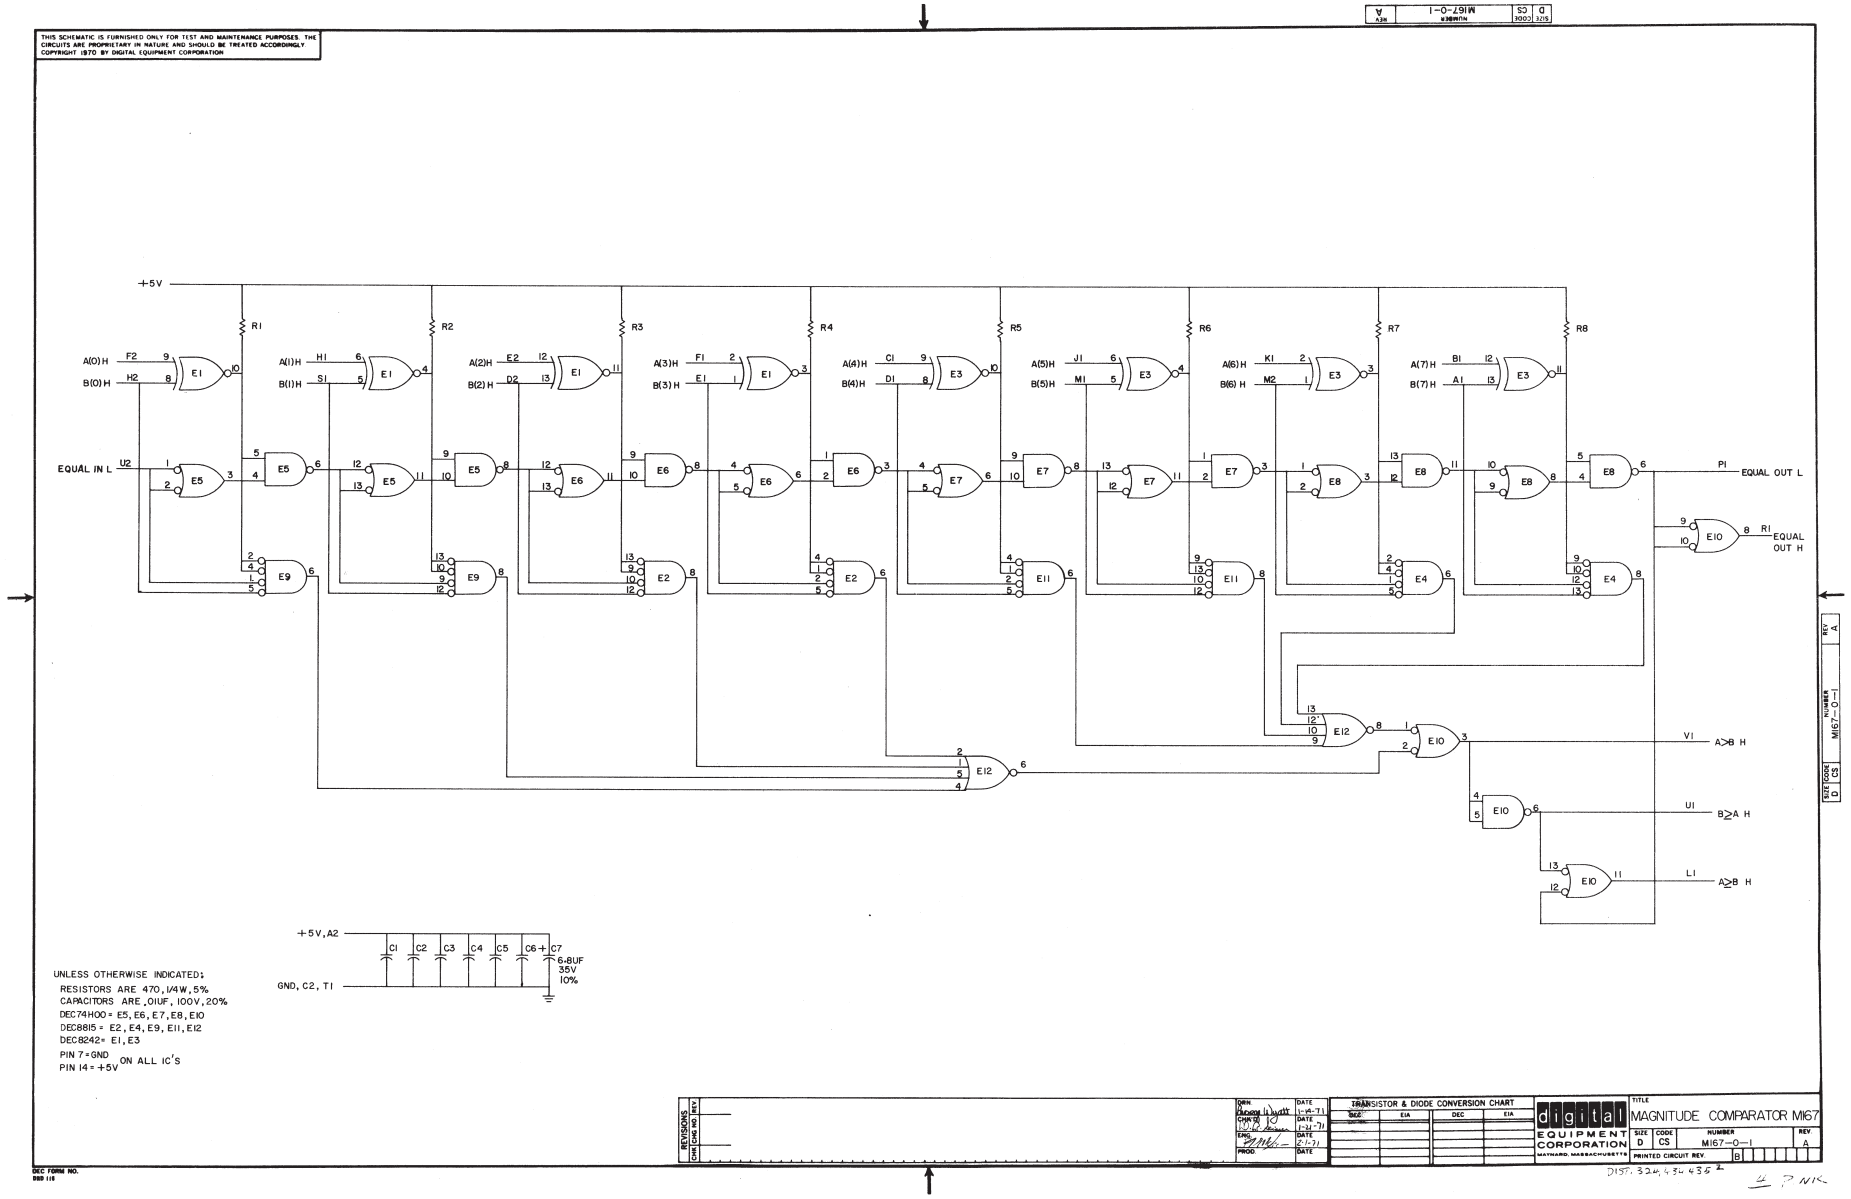

THIS SCHEMATIC IS FURNISHED ONLY FOR TEST AND MAINTENANCE PURPOSES. THE CIRCUITS ARE PROPRIETARY IN NATURE AND SHOULD BE TREATED ACCORDINGLY.
COPYRIGHT 1970 BY DIGITAL EQUIPMENT CORPORATION
M167-0-1
+5V
R1
R2
R3
R4
R5
R6
R7
R8
A(0) H
B(0) H
A(1) H
B(1) H
A(2) H
B(2) H
A(3) H
B(3) H
A(4) H
B(4) H
A(5) H
B(5) H
A(6) H
B(6) H
A(7) H
B(7) H
EQUAL IN L
PI EQUAL OUT L
RI EQUAL OUT H
VI A>B H
UI B>A H
LI A<B H
+5V, A2
GND, C2, T1
C1
C2
C3
C4
C5
C6
C7
6-8UF 35V 10%
UNLESS OTHERWISE INDICATED;
RESISTORS ARE 470, 1/4W, 5%
CAPACITORS ARE .01UF, 100V, 20%
DEC74H00 = E5, E6, E7, E8, E10
DEC8815 = E2, E4, E9, E11, E12
DEC8242 = E1, E3
PIN 7 = GND
PIN 14 = +5V ON ALL IC'S
REVISIONS
TRANSISTOR & DIODE CONVERSION CHART
DEC
EIA
digital
EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS
TITLE
MAGNITUDE COMPARATOR M167
SIZE D
CODE CS
NUMBER M167-0-1
REV A
PRINTED CIRCUIT REV B
DEC FORM NO. 888 118