



THIS SCHEMATIC IS FURNISHED ONLY FOR TEST AND MAINTENANCE PURPOSES. THE CIRCUITS ARE PROPRIETARY IN NATURE AND SHOULD BE TREATED ACCORDINGLY. COPYRIGHT 1970 BY DIGITAL EQUIPMENT CORPORATION

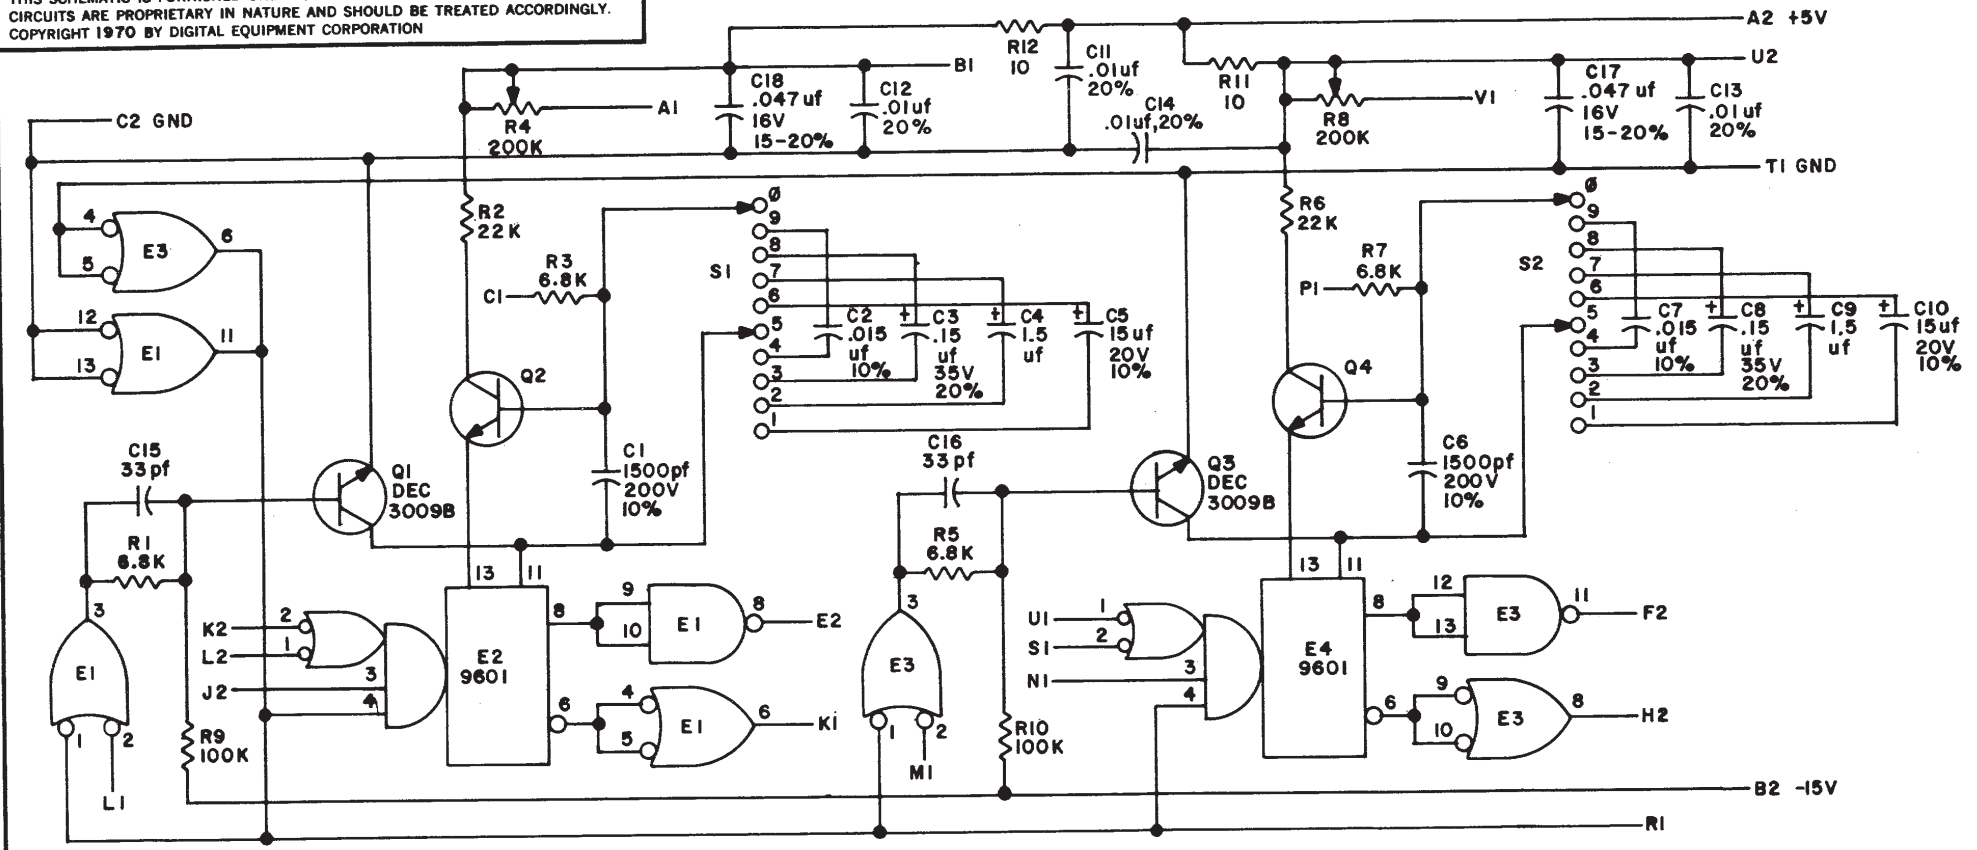

UNLESS OTHERWISE INDICATED:
 TRANSISTORS ARE 2N5088
 RESISTORS ARE 1/4W, 5%
 CAPACITORS ARE 100V, 5%
 R4 & R8 ARE 78PR POTS
 SWITCHES ARE 2 POLE, 5 POSITION SPECTROL
 E1, E3 ARE DEC7400
 PIN 7 ON EACH IC = GND
 PIN 14 ON E1, E3 = +5V
 PIN 14 ON E2 = VCC, PIN B1
 PIN 14 ON E4 = VCC, PIN U2



RANGE 5 5 μsec. — 50 μsec.
 4 50 μsec. — 500 μsec.
 3 500 μsec. — 5 msec.
 2 5 msec. — 50 msec.
 1 50 msec. — 500 msec.

REVISIONS				TRANSISTOR & DIODE CONVERSION CHART				digital				TITLE			
CHK	CHG	NO.	REV.	DEC	EIA	DEC	EIA	EQUIPMENT CORPORATION				SIZE	CODE	NUMBER	REV.
MH	0000	1	A	DEC 3009B	2N3009			MAYNARD, MASSACHUSETTS				B	CS	M307-0-1	B
REV	8	RED	R	2N5088	NONE							PRINTED CIRCUIT REV.			
ENG.	R. SCHWEGLER	DATE	9-4-69												
PROD.	R. SCHWEGLER	DATE	9-4-69												