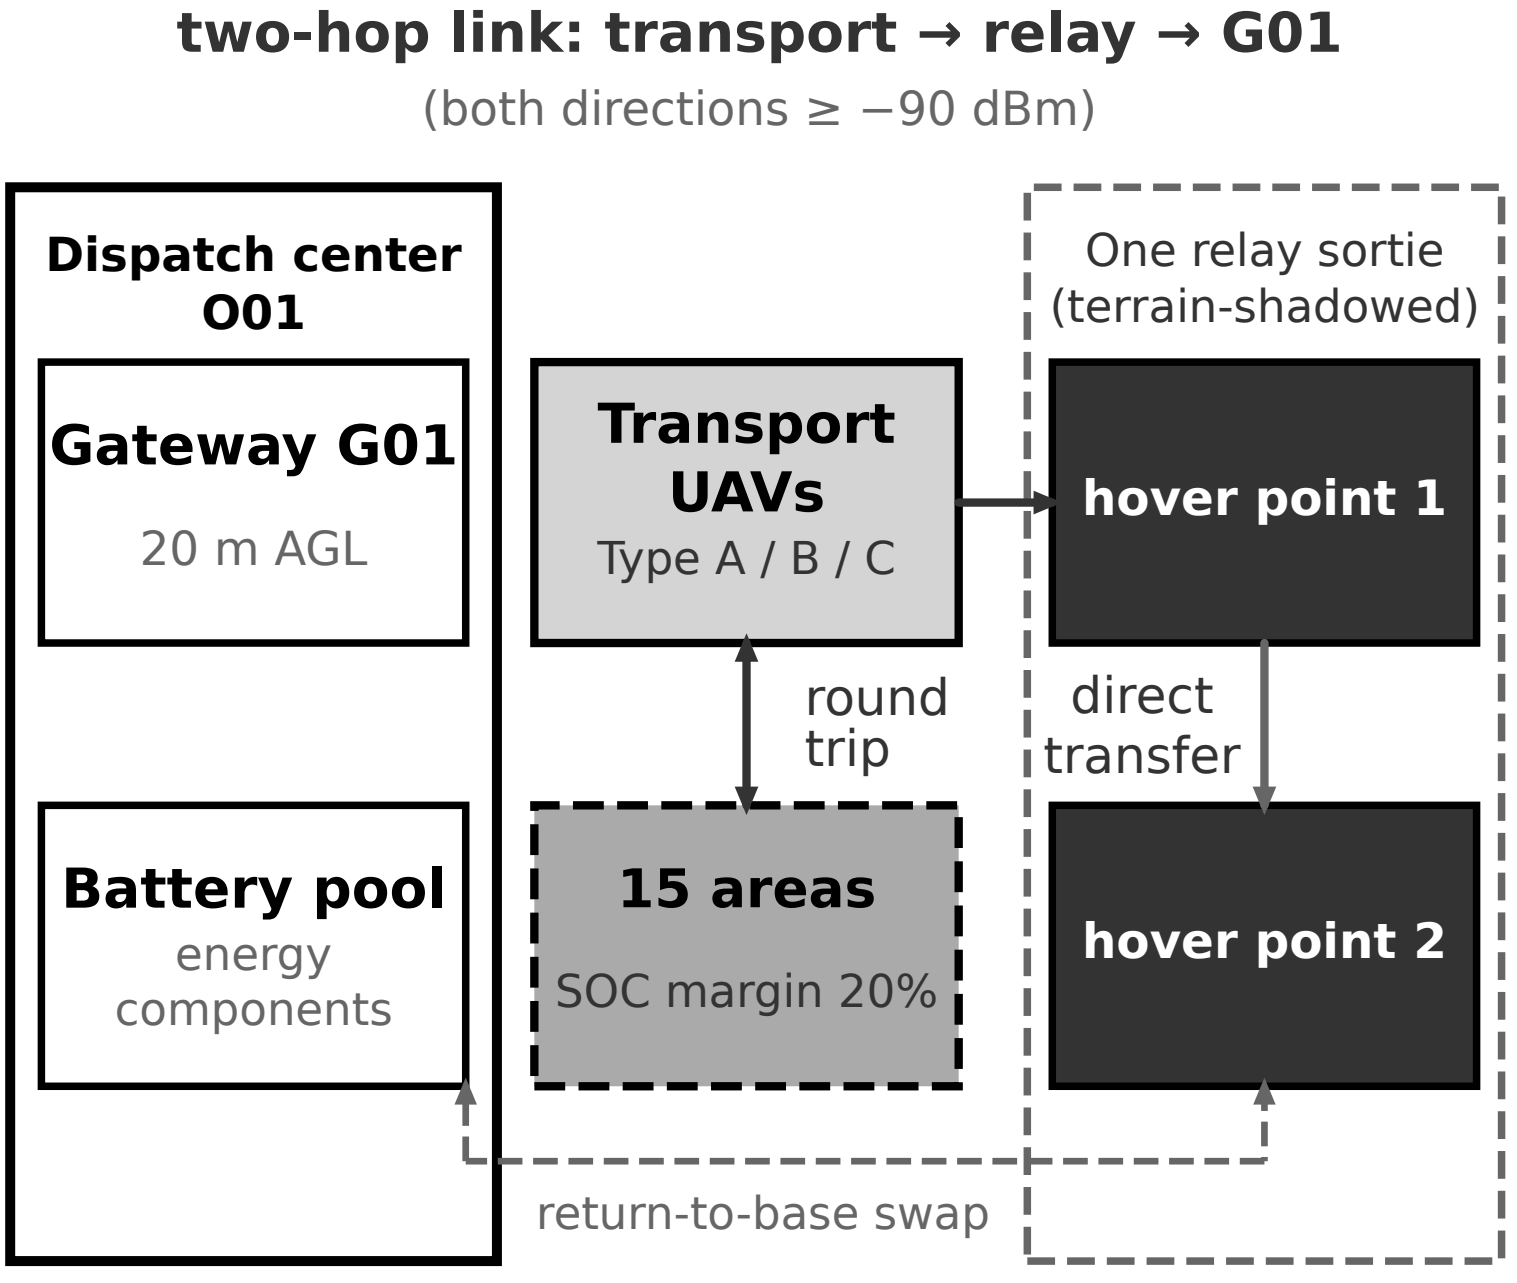
two-hop link: transport → relay → G01
(both directions ≥ −90 dBm)
Dispatch center
O01
Gateway G01
20 m AGL
Battery pool
energy
components
Transport
UAVs
Type A / B / C
round
trip
15 areas
SOC margin 20%
One relay sortie
(terrain-shadowed)
hover point 1
direct
transfer
hover point 2
return-to-base swap