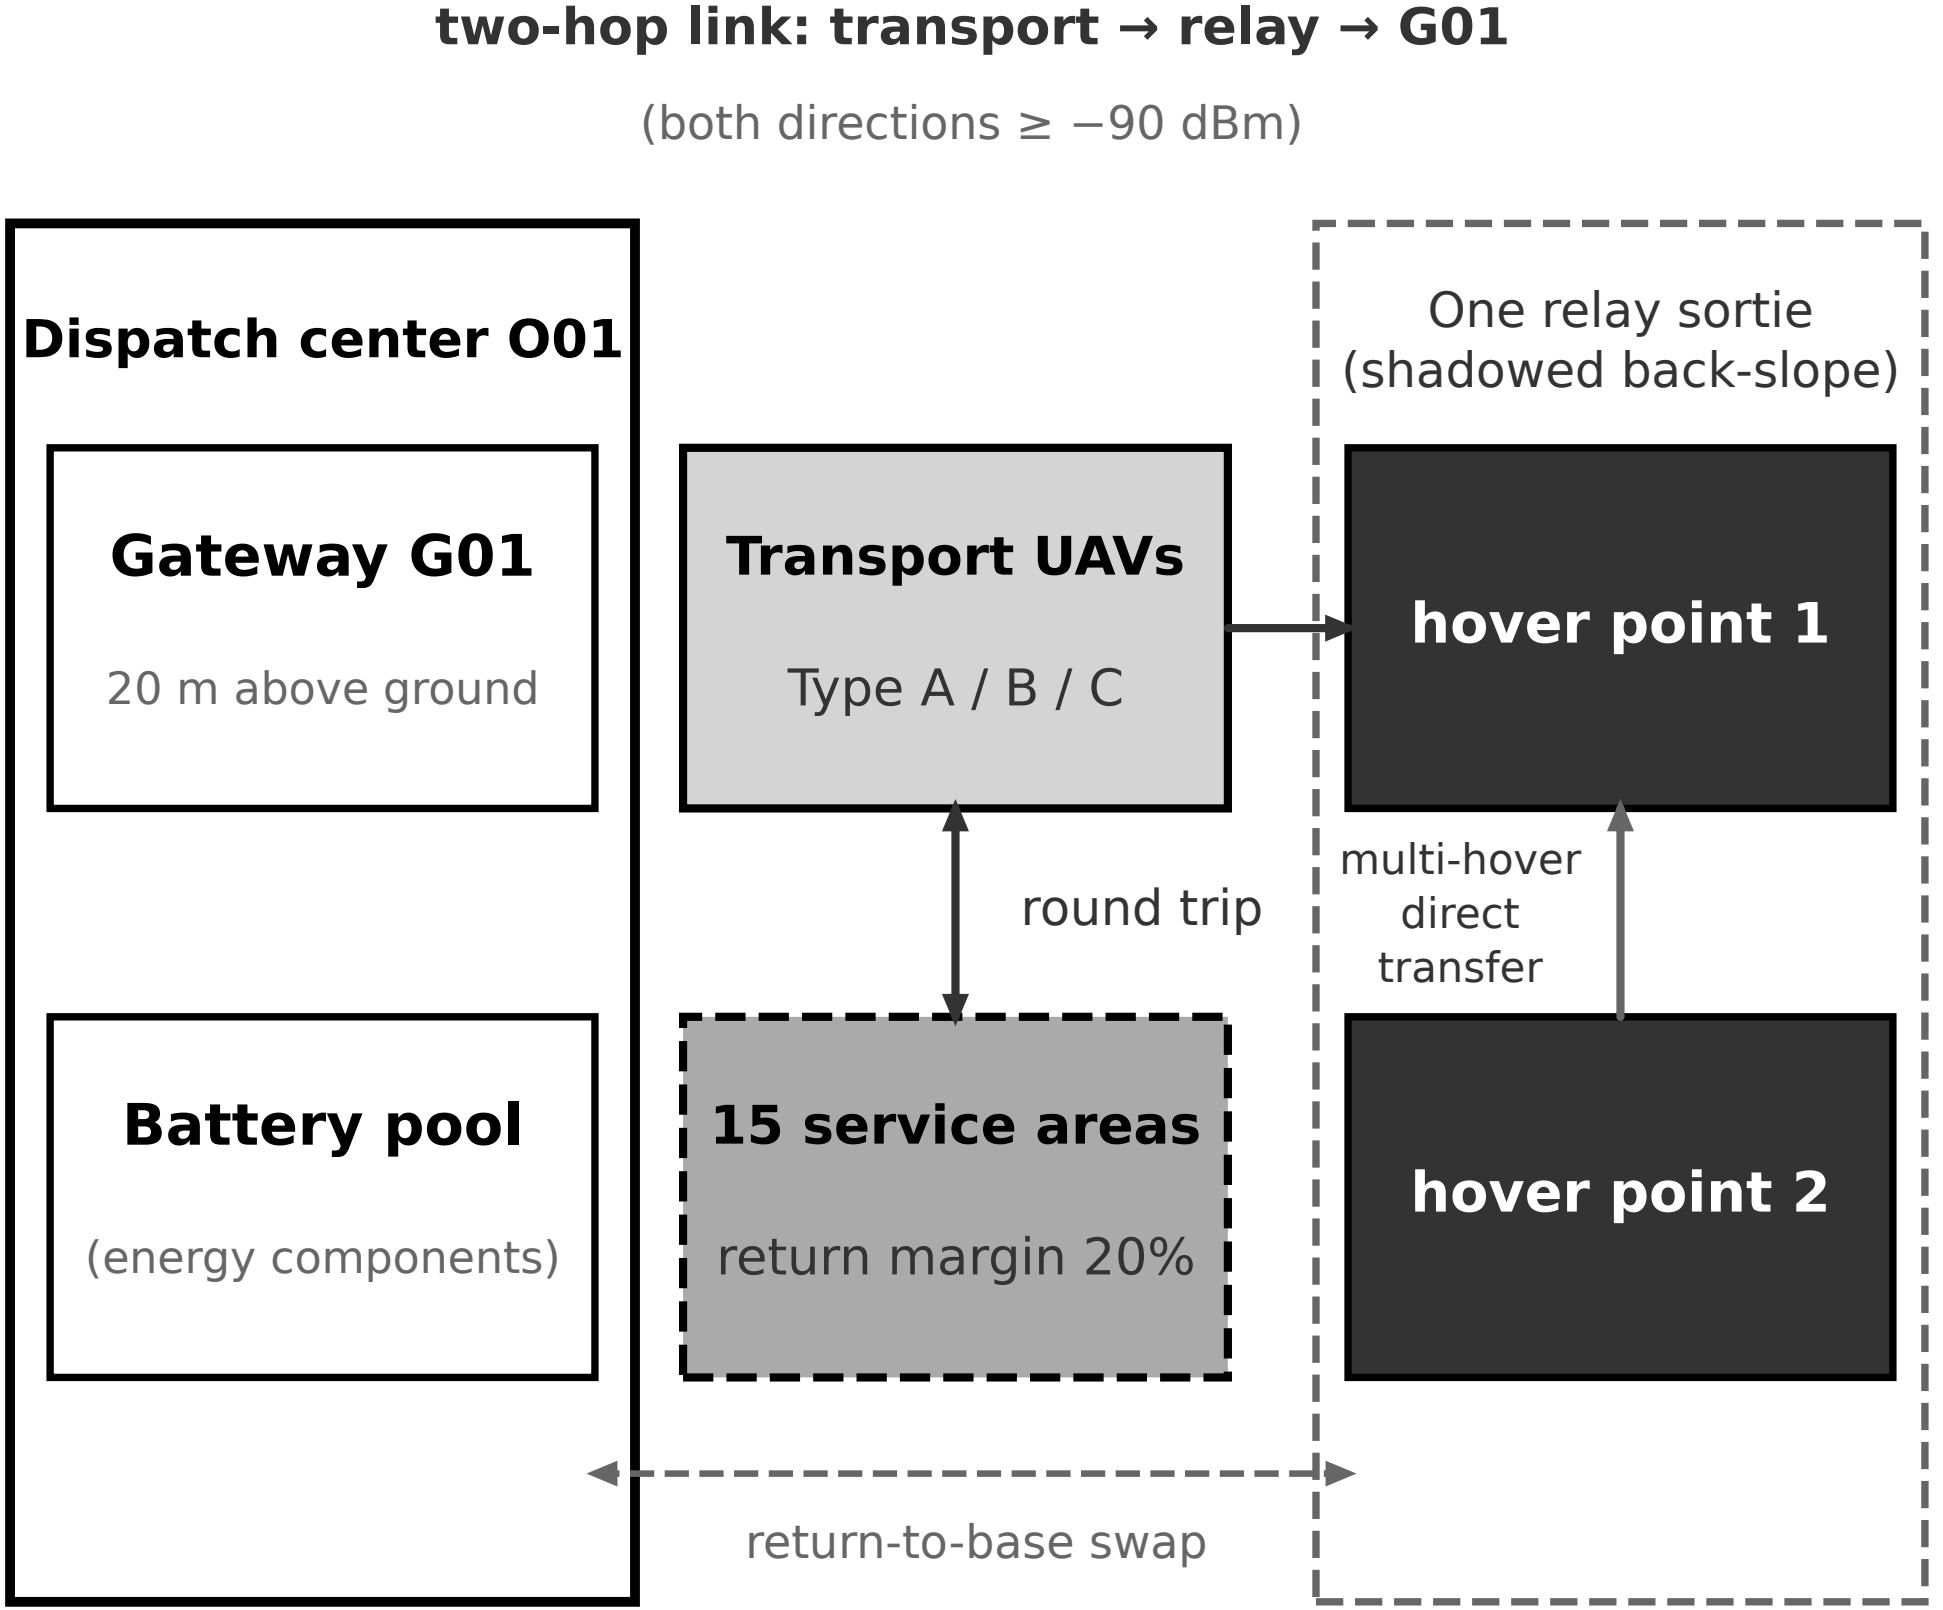
two-hop link: transport → relay → G01
(both directions ≥ −90 dBm)
Dispatch center O01
Gateway G01
20 m above ground
Battery pool
(energy components)
Transport UAVs
Type A / B / C
round trip
15 service areas
return margin 20%
One relay sortie
(shadowed back-slope)
hover point 1
multi-hover
direct
transfer
hover point 2
return-to-base swap