3DD13001 TRANSISTOR (NPN)

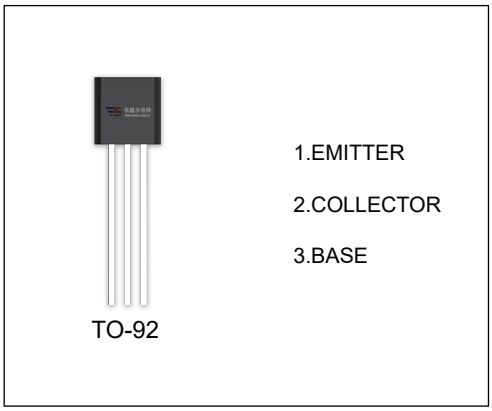

FEATURES

- Power switching applications

ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
3DD13001	TO-92	Bulk	1000pcs/Bag
3DD13001-TA	TO-92	Tape	2000pcs/Box

MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	700	V
V_{CEO}	Collector-Emitter Voltage	400	V
V_{EBO}	Emitter-Base Voltage	8	V
I_C	Collector Current -Continuous	0.2	A
P_C	Collector Power Dissipation	0.625	W
T_J,T_{stg}	Operation Junction and Storage Temperature Range	-55~150	℃

T_a=25℃ unless otherwise specified

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	I_C= 1mA,I_E=0	700			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	I_C=1mA,I_B=0	400		450	V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	I_E=0.1mA,I_C=0	8			V
Collector cut-off current	I_{CBO}	V_{CB}=600V,I_E=0			100	μA
Collector cut-off current	I_{CEO}	V_{CE}=400V,I_B=0			100	μA
Emitter cut-off current	I_{EBO}	V_{EB}=7V,I_C=0			100	μA
DC current gain	$h_{FE(1)}$	V_{CE}=20V, I_C=20mA	14		29	
	$h_{FE(2)}$	V_{CE}=10V, I_C=0.25mA	5			
	$h_{FE(3)}$	V_{CE}=5V, I_C=0.5A	1			
Collector-emitter saturation voltage	$V_{CE(sat)}$	I_C=50mA,I_B=10mA			0.4	V
Base-emitter saturation voltage	$V_{BE(sat)}$	I_C=50mA,I_B=10mA			1.1	V
Transition frequency	f_T	V_{CE}=20V,I_C=20mA,f=1MHz	8			MHz
Rail time	t_r	I_C=0.1A			0.9	μs
Storage time	t_s		0.9		2.4	μs

CLASSIFICATION OF $h_{FE(1)}$

Range	14-17	17-20	20-23	23-26	26-29

CLASSIFICATION OF t_S

Range	0.9-2 (μ s)	1.4-2.4 (μ s)

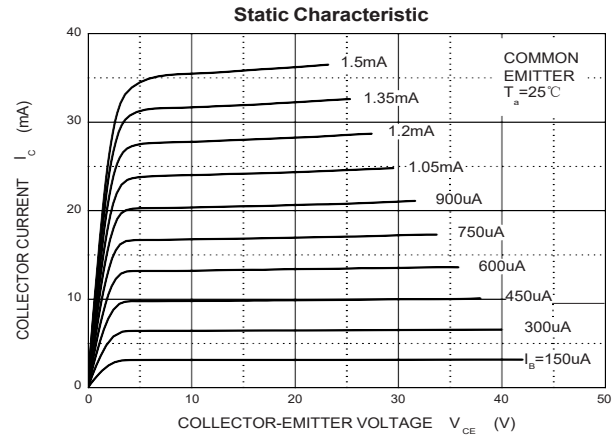
Static Characteristic
COMMON EMITTER
T a =25℃
1.5mA
1.35mA
1.2mA
1.05mA
900uA
750uA
600uA
450uA
300uA
I B =150uA
COLLECTOR CURRENT I C (mA)
COLLECTOR-EMITTER VOLTAGE V CE (V)

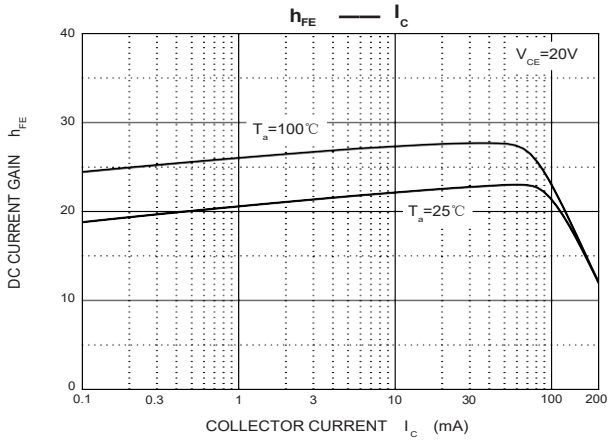
h FE —— I C
V CE =20V
T a =100℃
T a =25℃
DC CURRENT GAIN h FE
COLLECTOR CURRENT I C (mA)

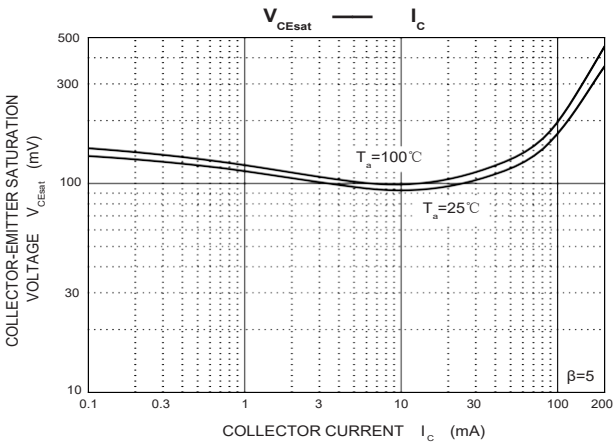
V CEsat —— I C
T a =100℃
T a =25℃
β=5
COLLECTOR-EMITTER SATURATION VOLTAGE V CEsat (mV)
COLLECTOR CURRENT I C (mA)

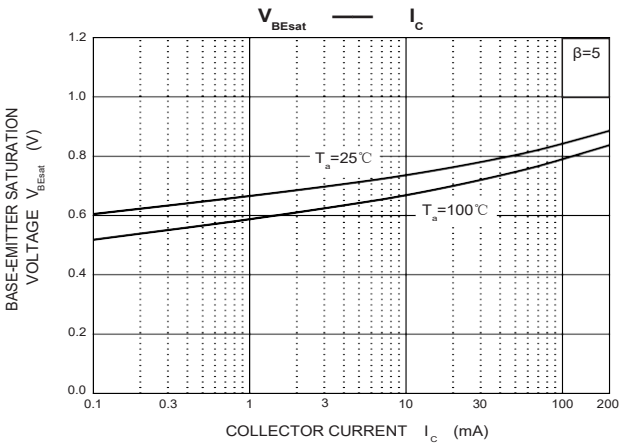
V BEsat —— I C
β=5
T a =25℃
T a =100℃
BASE-EMITTER SATURATION VOLTAGE V BEsat (V)
COLLECTOR CURRENT I C (mA)

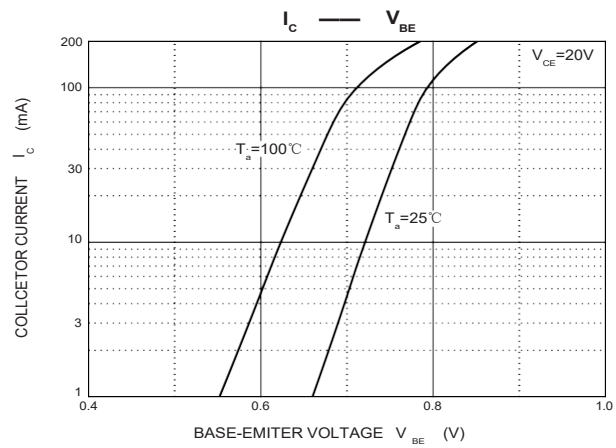
I C —— V BE
V CE =20V
T a =100℃
T a =25℃
COLLCETOR CURRENT I C (mA)
BASE-EMITER VOLTAGE V BE (V)

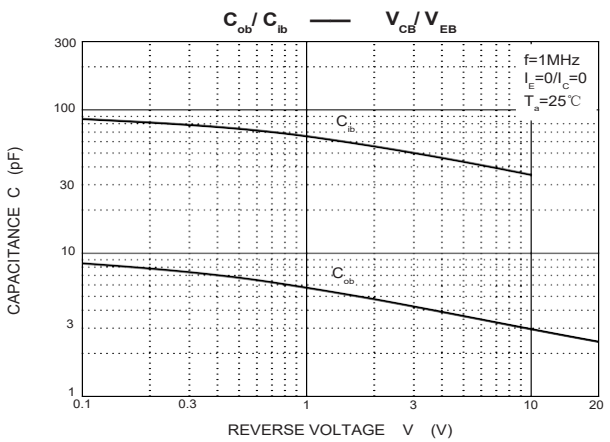
C ob / C ib —— V CB / V EB
f=1MHz
I E =0/I C =0
T a =25℃
C ib
C ob
CAPACITANCE C (pF)
REVERSE VOLTAGE V (V)

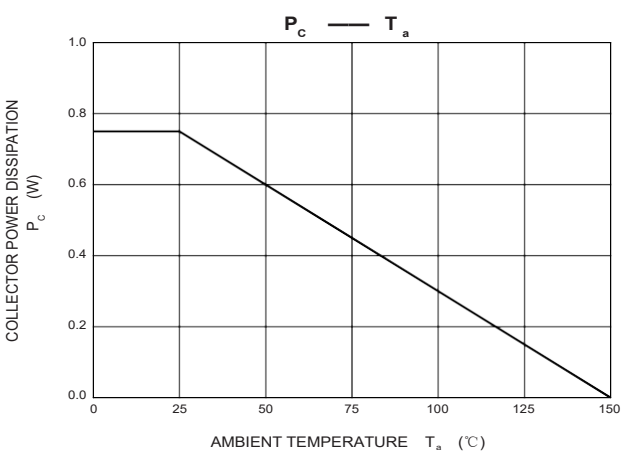
P C —— T a
COLLECTOR POWER DISSIPATION P C (W)
AMBIENT TEMPERATURE T a (℃)