

Figure 1: Movement of the Vernal Equinox Υ at the intersection of Equatorial and Ecliptic Planes due to precession and its influence on the rotation of Northern Celestial Pole (NCP) around the Northern Ecliptic Pole (NEP).

The *ecliptic plane* is the plane that contains the orbit of the Earth (♁) around the Sun (☉). The *equatorial plane* of the Earth defines its axis of rotation. The axis is influenced by

1. Precession with a 25772 year period.
2. Nutation with 18.6 year period with an amplitude of 9.2 arcseconds.
3. Polar motion with two components having 14- and 12-month periods.

The *mean equatorial plane* includes the effect of precession but the effect of nutation is averaged out. The *true equatorial plane* includes both the effects of precession and nutation.

The intersection of the ecliptic and equatorial planes is called the *vernal equinox* (Υ , see Figure 1). Since there are two directions associated to the intersection, the vernal equinox as a direction refers to the direction, where in March when the Sun travels through this intersection to the side of northern hemisphere. The *mean and true vernal equinoxes* are the intersections of the ecliptic plane with the mean and true equatorial planes, respectively.

The mean vernal equinox at the *J2000.0 epoch* is an important reference direction. The J2000.0 epoch is precisely Julian date 2451545.0 TT (Terrestrial Time) or January 1, 2000 noon TT. This is equivalent to January 1, 2000 11:59:27.816 TAI or January 1, 2000 11:58:55.816 UTC.

1 Time Conversions

Accurate computation of positions and orientations in space requires availability of conversions between different time standards. Personal computers can be synchronized over the Internet to UTC time with an accuracy of tens of milliseconds but availability of UTC time even with perfect availability does not alone allow accurate computations: The orientation of the Earth is coupled to UT1 time, which may differ from UTC time as much as 0.9 seconds. Satellite instruments often rely on atomic TAI time, which is decoupled from variations in the rotation of the Earth.

In amateur astronomy, an error of one second can be usually ignored but an error of one second can correspond to an error of 8 kilometers in the position of a satellite on low Earth orbit (LEO).

1.1 Time Standards

1.1.1 Solar Time

Apparent (or true) solar time is based on the movement of the Sun across the sky. A *solar day* is the time between two transits of the Sun over a local meridian. The length of a solar day is dependent on the location of the Earth on its slightly elliptic orbit. *Mean solar time* tracks theoretical mean movement of the Sun with uniform movement across the celestial equator. Watches keep track of mean solar time while sundials measure the apparent solar time. The relationship between the two is called the *equation of time*.

1.1.2 Sidereal Time

Apparent solar time contains contributions from both the rotation of the Earth and the movement of the Earth around Sun. The component related to the rotation is called *sidereal time*. *Sidereal day* is approximately 86164.0905 s while mean solar day is approximately 86400.002 s.

There are four varieties of sidereal time (see Figure 2):

- *Greenwich Apparent Sidereal Time* (GAST) is the clockwise angle from the meridian of the true vernal equinox to the Greenwich zero meridian.
- *Greenwich Mean Sidereal Time* (GMST) is the clockwise angle from the meridian of the mean vernal equinox to the Greenwich zero meridian.
- *Local Apparent Sidereal Time* (LAST) is the clockwise angle from the meridian of the true vernal equinox to the local meridian.
- *Local Mean Sidereal Time* (LMST) is the clockwise angle from the meridian of the mean vernal equinox to the local meridian.

The mean and apparent varieties are related by the *equation of the equinoxes*:

$$\text{GMST} - \text{GAST} = \text{LMST} - \text{LAST} = \alpha_E, \quad (1)$$

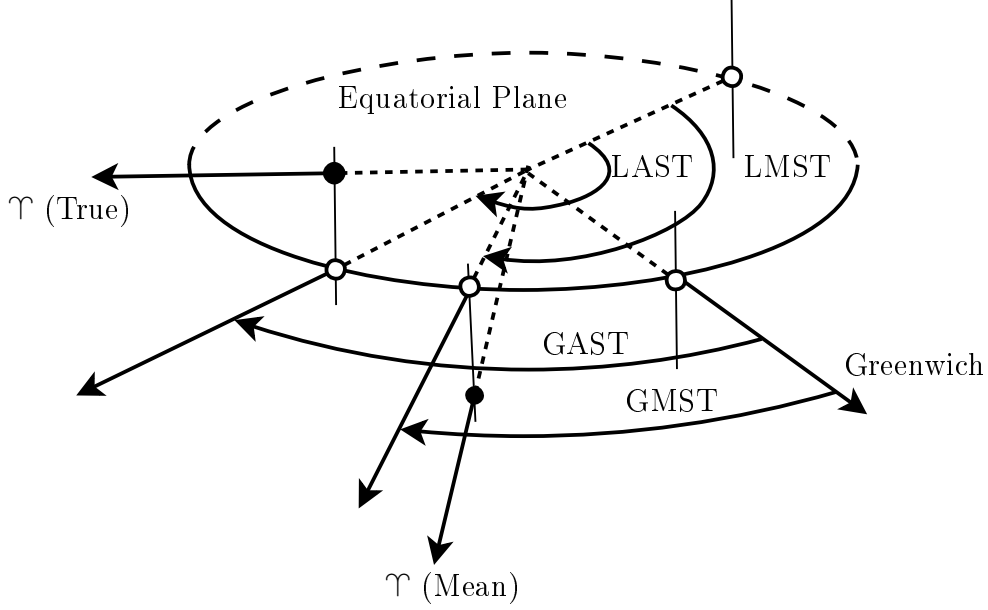


Figure 2: Types of sidereal time. Vertical lines correspond to meridians. The angle between true and mean vernal equinox is exaggerated.

where α_E is a nutational parameter (31). Greenwich and local varieties are related by

$$\text{LMST} - \text{GMST} = \text{LAST} - \text{GAST} = \lambda \quad (2)$$

where λ is the east longitude of the local meridian.

1.1.3 Universal Time

The *UT1 time* describes roughly the rotation angle of the Earth scaled by the factor

$$\text{one mean Solar day/one sidereal day.} \quad (3)$$

with additional adjustments for polar motion. It is defined via the relationship:

$$\text{GMST} = 1.002\,737\,909\,350\,795 \cdot \text{UT1} + \text{GMST}_0, \quad (4)$$

where $\text{UT1} \in [0.0 \text{ h}, 24.0 \text{ h})$ and Greenwich Mean Sidereal Time at 0^h UT1 :

$$\text{GMST}_0 := 6^h 41^m 50^s.548\,51 + 8\,640\,184^s.812\,866\,T_u + 0^s.093\,104\,T_u^2 - 6^s.2\,10^{-6}T_u^3, \quad (5)$$

and

$$T_u := \frac{JD - 2\,451\,545}{36\,525}. \quad (6)$$

The Julian Date in the above is w.r.t. UT1 and points to the UT1 midnight of the day. Thus, it has the fractional part .5. The linear term in (5) corresponds to the orbit of the Earth around the Sun and corresponds to the fractional part in (4):

$$8\,640\,184^s.812\,866 \frac{\Delta JD}{36\,525} = 0^h.002\,737\,909\,350\,795 \cdot 24 \Delta JD. \quad (7)$$

1.1.4 Atomic Time and Coordinated Universal Time

International Atomic Time (TAI) is based on notional passage of proper time on Earth's geoid. Passage of TAI is continuous based on weighted average of 400 atomic clocks worldwide. TAI forms the basis *Coordinated Universal Time* (UTC), which deviates from TAI by integer number of leap seconds. Leap seconds are introduced at

December 31 23:59:60 UTC

of suitable years so that

$$|\text{UTC} - \text{UT1}| < 0.9 \text{ s} \quad (8)$$

holds at every given moment in time.

1.2 Earth Orientation Parameters

Since the rotation of the Earth determines UT1 and the rotation cannot be accurately predicted, the relationship between UT1, TAI and UTC has to be obtained from measurement of the rotation of the Earth.

The U.S. Naval Observatory's Earth Orientation Department is responsible for determining and predicting Earth Orientation Parameters (EOPs), which describes the time-varying orientation of the Earth. The EOPs are determined from radio telescope measurements of objects billions of light years away. The EOPs are part of the bulletins published by the International Earth Rotation and Reference Systems Service (IERS). IERS Bulletin A includes predictions for:

- TAI - UTC difference,
- UT1 - UTC (DUT1) difference,
- Polar motion parameters x and y

as well as measured errors for past predictions.

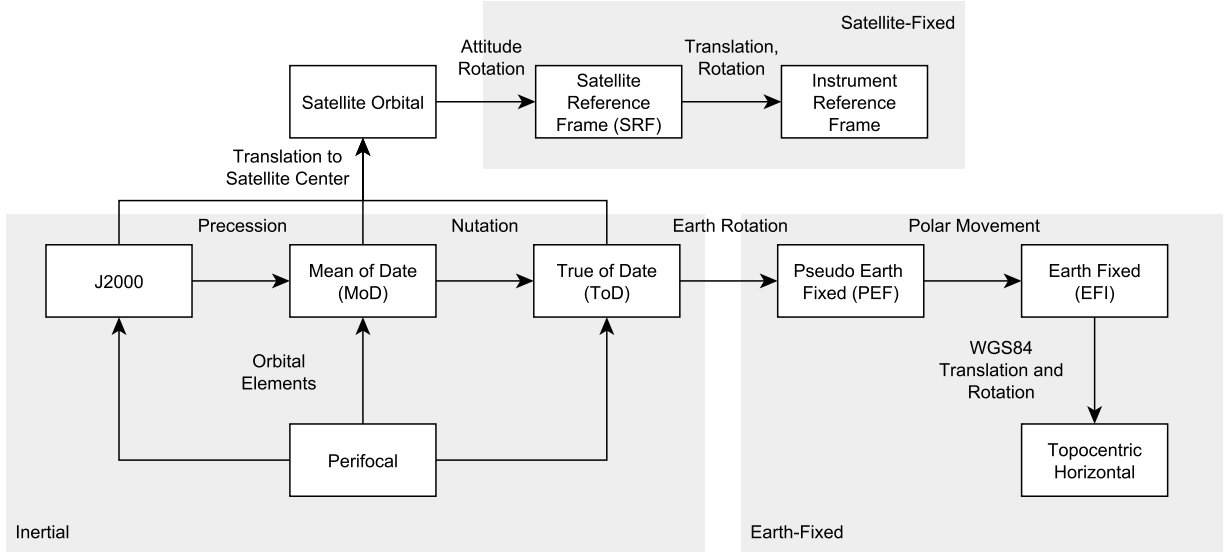


Figure 3: Frames related to satellite orbits and transformation between them.

2 Reference Systems and Frames

A conventional *coordinate or reference system* is a set of prescriptions that defines a triad of orthogonal axes at any time whereas conventional *frame* is the practical realization of a system at a specific epoch based on the system prescriptions. Reference frames and their relationships discussed in this section are depicted in Figure 3.

The discussion of Earth-Centered Frames is based on [1] and [2].

2.1 Earth-Centered Systems

Earth-Centered Systems have their origin in the barycenter (also called geocenter) of the Earth. Such systems are also called *geocentric* [1]. Geocentric systems are related to each other by only rotations. In general, a RHS system is used, where the Z-axis matches the axis of rotation and in inertial systems, the X-axis points towards the vernal equinox.

2.1.1 J2000 System

The mean equator and equinox J2000.0 were defined by the International Astronomical Union (IAU) agreements in 1976 with 1980 nutation series [?]. Definitions

- The X-axis points in the direction of the (computed?) mean vernal equinox at the J2000.0 epoch.
- The Y-axis is orthogonal to X and Z axes to produce a RHS system.
- The Z-axis is orthogonal to the plane defined by the mean equator at the J2000.0 epoch.

lead to a reference system called *Conventional Celestial Reference System (CRS)* also called the *J2000 system* or *GM2000 system*.

2.1.2 Mean of Date Reference System

The *Mean of Date (MoD) Reference System* is identical to the J2000.0/GM2000 system except that the equatorial plane is determined according to current (of date) mean vernal equinox and mean equatorial plane. That is,

- The X-axis points in the direction of the of date mean vernal equinox.
- The Y-axis is orthogonal to X and Z axes to produce a RHS system.
- The Z-axis is orthogonal to the plane defined by the of date mean equator.

2.1.3 True of Date Reference System

The *True of Date (ToD) Reference System* is identical to the J2000.0/GM2000 frame except that the equatorial plane is determined according to current (of date) true vernal equinox and true equatorial plane. That is,

- The X-axis points in the direction of the of date true vernal equinox.
- The Y-axis is orthogonal to X and Z axes to produce a RHS system.
- The Z-axis is orthogonal to the plane defined by the of date true equator.

2.1.4 Earth Fixed System

The *Earth Fixed System (EFI)* is the *IERS Terrestrial Reference System*, which is compatible with the WGS 84:

- The X-axis is the intersection of the IERS Reference Meridian (IRM) and the plane passing through the origin and normal to the Z-axis.
- The Y-axis is orthogonal to X and Z axes to produce a RHS system.
- The Z-axis points to the direction IERS Reference Pole (IRP).

The IRM is the prime meridian with 0° longitude maintained by the IERS.

2.1.5 Pseudo Earth Fixed System

The *Pseudo Earth Fixed (PEF) System* is equal to the Earth Fixed System without polar motion. The system is also called the *Earth Centered Earth Fixed (ECEF)* system.

2.2 Conversions Between Earth-Centered Frames

The rotation matrices between the Earth-centered frames are as follows,

$$\text{J2000} \xrightarrow{P} \text{MoD} \xrightarrow{N} \text{ToD} \xrightarrow{R} \text{PEF} \xrightarrow{R_M} \text{EFI} \quad (9)$$

where the rotation matrices are defined as follows:

$$P = R_z(-z)R_y(\nu)R_z(-\zeta) \quad (10)$$

$$N = R_x(-\epsilon')R_z(-\Delta\psi)R_x(\epsilon) \quad (11)$$

$$R = R_z(\text{GAST}) \quad (12)$$

$$R_M = R_y(-x_p)R_x(-y_p), \quad (13)$$

where the rotation matrix parameters are defined in sections below. The rotation matrices are defined as follows:

$$R_x(\theta) := \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \theta & \sin \theta \\ 0 & -\sin \theta & \cos \theta \end{bmatrix}, R_y(\theta) := \begin{bmatrix} \cos \theta & 0 & -\sin \theta \\ 0 & 1 & 0 \\ \sin \theta & 0 & \cos \theta \end{bmatrix}, R_z(\theta) := \begin{bmatrix} \cos \theta & \sin \theta & 0 \\ -\sin \theta & \cos \theta & 0 \\ 0 & 0 & 1 \end{bmatrix}. \quad (14)$$

2.2.1 Conversion Between J2000 to MoD Frames

The conversion between J2000 and MoD frames is determined by the Precession matrix

$$P = R_z(-z)R_y(\nu)R_z(-\zeta), \quad (15)$$

where the angles are given by the expressions (IAU 1976 Precession Model):

$$z = 2306''.2181 T + 1''.09468 T^2 + 0''.018203 T^3 \quad (16)$$

$$\nu = 2004''.3109 T - 0''.42665 T^2 - 0''.041833 T^3$$

$$\zeta = 2306''.2181 T + 0''.30188 T^2 + 0''.017998 T^3,$$

where

$$T = \frac{JT - 2\,451\,544.9992572}{36525.0} \approx \frac{JT - 2\,451\,545}{36525.0} \quad (17)$$

is the number of Julian centuries from the J2000.0 epoch. (16) can be written in term of degrees

$$\begin{bmatrix} z \\ \nu \\ \zeta \end{bmatrix} = \begin{bmatrix} 6.406161389^\circ \cdot 10^{-1} & 3.040777777^\circ \cdot 10^{-4} & 5.056388889^\circ \cdot 10^{-6} \\ 5.567530278^\circ \cdot 10^{-1} & -1.185138889^\circ \cdot 10^{-4} & -1.162027778^\circ \cdot 10^{-5} \\ 6.406161389^\circ \cdot 10^{-1} & 8.385555556^\circ \cdot 10^{-5} & 4.999444444^\circ \cdot 10^{-6} \end{bmatrix} \begin{bmatrix} T \\ T^2 \\ T^3 \end{bmatrix}. \quad (18)$$

2.2.2 Conversion Between MoD to ToD Frames

The conversion between the MoD and ToD is determined by the Nutation matrix

$$N = R_x(-\epsilon')R_z(-\Delta\psi)R_x(\epsilon), \quad (19)$$

where

$$\epsilon' = \epsilon + \Delta\epsilon, \quad (20)$$

$$\begin{aligned} \epsilon &= 23^\circ 26' 21''.448 - 46''.8150 T - 0''.00059 T^2 + 0''.001813 T^3 \\ &= 23.4392911111^\circ - 0.0130041667^\circ T - 1.6388888889^\circ 10^{-7} T^2 + 5.0361111111^\circ \cdot 10^{-7} T^3, \end{aligned} \quad (21)$$

$$\Delta\psi = (10^{-4}'') \cdot \sum_{j=1}^N \left[(A_{0j} + A_{1j}T) \sin \left(\sum_{i=1}^5 k_{ji} \alpha_i \right) \right], \quad (22)$$

$$\Delta\epsilon = (10^{-4}'') \cdot \sum_{j=1}^N \left[(B_{0j} + B_{1j}T) \cos \left(\sum_{i=1}^5 k_{ji} \alpha_i \right) \right]. \quad (23)$$

The parameters α_i are functions T : Mean anomaly of the Moon

$$\begin{aligned} \alpha_1 &= 134.9629813889^\circ + 198.8673980555^\circ T + 8.6972222222^\circ \cdot 10^{-3} T^2 \\ &\quad + (1.7777777778^\circ \cdot 10^{-5} T^3) + (1325.0 \cdot 360.0^\circ T). \end{aligned} \quad (24)$$

Mean anomaly of the Sun

$$\begin{aligned} \alpha_2 &= 357.5277233333^\circ + 359.0503400000^\circ T - 1.6027777778^\circ \cdot 10^{-4} T^2 \\ &\quad - (3.3333333333^\circ \cdot 10^{-6} T^3) + (99.0 \cdot 360.0^\circ T). \end{aligned} \quad (25)$$

Moon's mean argument of latitude

$$\begin{aligned} \alpha_3 &= 93.2719102778^\circ + 82.0175380556^\circ T - 3.6825000000^\circ \cdot 10^{-3} T^2 \\ &\quad + (3.0555555555^\circ \cdot 10^{-6} T^3) + (1342.0 \cdot 360.0^\circ T). \end{aligned} \quad (26)$$

Moon's mean elongation from the Sun

$$\begin{aligned} \alpha_4 &= 297.8503630555^\circ + 307.1114800000^\circ T - 1.9141666667^\circ \cdot 10^{-3} T^2 \\ &\quad + (5.2777777778^\circ \cdot 10^{-6} T^3) + (1236.0 \cdot 360.0^\circ T). \end{aligned} \quad (27)$$

Mean longitude of the ascending lunar node

$$\begin{aligned} \alpha_5 &= 125.0445222222^\circ - 134.1362608333^\circ T + 2.0708333333^\circ \cdot 10^{-3} T^2 \\ &\quad + (2.2222222222^\circ \cdot 10^{-6} T^3) - (5.0 \cdot 360.0^\circ T). \end{aligned} \quad (28)$$

The parameters $A_{0j}, A_{1j}, B_{0j}, B_{1j}$ are listed in Table 1.

i	k_{i1}	k_{i2}	k_{i3}	k_{i4}	k_{i5}	Period	A_{0j}	A_{1j}	B_{0j}	B_{1j}
1	0	0	0	0	1	-6798.4	-171996.0	-174.2	92025.0	8.9
2	0	0	2	-2	2	182.6	-13187.0	-1.6	5736.0	-3.1
3	0	0	2	0	2	13.7	-2274.0	-0.2	977.0	-0.5
4	0	0	0	0	2	-3399.2	2062.0	0.2	-895.0	0.5
5	0	-1	0	0	0	-365.3	-1426.0	3.4	54.0	-0.1
6	1	0	0	0	0	27.6	712.0	0.1	-7.0	0.0
7	0	1	2	-2	2	121.7	-517.0	1.2	224.0	-0.6
8	0	0	2	0	1	13.6	-386.0	-0.4	200.0	0.0
9	1	0	2	0	2	9.1	-301.0	0.0	129.0	-0.1
10	0	-1	2	-2	2	365.2	217.0	-0.5	-95.0	0.3
11	-1	0	0	2	0	31.8	158.0	0.0	-1.0	0.0
12	0	0	2	-2	1	177.8	129.0	0.1	-70.0	0.0
13	-1	0	2	0	2	27.1	123.0	0.0	-53.0	0.0
14	1	0	0	0	1	27.7	63.0	0.1	-33.0	0.0
15	0	0	0	2	0	14.8	63.0	0.0	-2.0	0.0
16	-1	0	2	2	2	9.6	-59.0	0.0	26.0	0.0
17	-1	0	0	0	1	-27.4	-58.0	-0.1	32.0	0.0
18	1	0	2	0	1	9.1	-51.0	0.0	27.0	0.0
19	-2	0	0	2	0	-205.9	-48.0	0.0	1.0	0.0
20	-2	0	2	0	1	1305.5	46.0	0.0	-24.0	0.0
21	0	0	2	2	2	7.1	-38.0	0.0	16.0	0.0
22	2	0	2	0	2	6.9	-31.0	0.0	13.0	0.0
23	2	0	0	0	0	13.8	29.0	0.0	-1.0	0.0
24	1	0	2	-2	2	23.9	29.0	0.0	-12.0	0.0
25	0	0	2	0	0	13.6	26.0	0.0	-1.0	0.0
26	0	0	2	-2	0	173.3	-22.0	0.0	0.0	0.0
27	-1	0	2	0	1	27.0	21.0	0.0	-10.0	0.0
28	0	2	0	0	0	182.6	17.0	-0.1	0.0	0.0
29	0	2	2	-2	2	91.3	-16.0	0.1	7.0	0.0
30	-1	0	0	2	1	32.0	16.0	0.0	-8.0	0.0
31	0	1	0	0	1	386.0	-15.0	0.0	9.0	0.0
32	1	0	0	-2	1	-31.7	-13.0	0.0	7.0	0.0
33	0	-1	0	0	1	-346.6	-12.0	0.0	6.0	0.0
34	2	0	-2	0	0	-1095.2	11.0	0.0	0.0	0.0
35	-1	0	2	2	1	9.5	-10.0	0.0	5.0	0.0
36	1	0	2	2	2	5.6	-8.0	0.0	3.0	0.0
37	0	-1	2	0	2	14.2	-7.0	0.0	3.0	0.0
38	0	0	2	2	1	7.1	-7.0	0.0	3.0	0.0
39	1	1	0	-2	0	-34.8	-7.0	0.0	0.0	0.0
40	0	1	2	0	2	13.2	7.0	0.0	-3.0	0.0
41	-2	0	0	2	1	-199.8	-6.0	0.0	3.0	0.0
42	0	0	0	2	1	14.8	-6.0	0.0	3.0	0.0
43	2	0	2	-2	2	12.8	6.0	0.0	-3.0	0.0

i	k_{i1}	k_{i2}	k_{i3}	k_{i4}	k_{i5}	Period	A_{0j}	A_{1j}	B_{0j}	B_{1j}
44	1	0	0	2	0	9.6	6.0	0.0	0.0	0.0
45	1	0	2	-2	1	23.9	6.0	0.0	-3.0	0.0
46	0	0	0	-2	1	-14.7	-5.0	0.0	3.0	0.0
47	0	-1	2	-2	1	346.6	-5.0	0.0	3.0	0.0
48	2	0	2	0	1	6.9	-5.0	0.0	3.0	0.0
49	1	-1	0	0	0	29.8	5.0	0.0	0.0	0.0
50	1	0	0	-1	0	411.8	-4.0	0.0	0.0	0.0
51	0	0	0	1	0	29.5	-4.0	0.0	0.0	0.0
52	0	1	0	-2	0	-15.4	-4.0	0.0	0.0	0.0
53	1	0	-2	0	0	-26.9	4.0	0.0	0.0	0.0
54	2	0	0	-2	1	212.3	4.0	0.0	-2.0	0.0
55	0	1	2	-2	1	119.6	4.0	0.0	-2.0	0.0
56	1	1	0	0	0	25.6	-3.0	0.0	0.0	0.0
57	1	-1	0	-1	0	-3232.9	-3.0	0.0	0.0	0.0
58	-1	-1	2	2	2	9.8	-3.0	0.0	1.0	0.0
59	0	-1	2	2	2	7.2	-3.0	0.0	1.0	0.0
60	1	-1	2	0	2	9.4	-3.0	0.0	1.0	0.0
61	3	0	2	0	2	5.5	-3.0	0.0	1.0	0.0
62	-2	0	2	0	2	1615.7	-3.0	0.0	1.0	0.0
63	1	0	2	0	0	9.1	3.0	0.0	0.0	0.0
64	-1	0	2	4	2	5.8	-2.0	0.0	1.0	0.0
65	1	0	0	0	2	27.8	-2.0	0.0	1.0	0.0
66	-1	0	2	-2	1	-32.6	-2.0	0.0	1.0	0.0
67	0	-2	2	-2	1	6786.3	-2.0	0.0	1.0	0.0
68	-2	0	0	0	1	-13.7	-2.0	0.0	1.0	0.0
69	2	0	0	0	1	13.8	2.0	0.0	-1.0	0.0
70	3	0	0	0	0	9.2	2.0	0.0	0.0	0.0
71	1	1	2	0	2	8.9	2.0	0.0	-1.0	0.0
72	0	0	2	1	2	9.3	2.0	0.0	-1.0	0.0
73	1	0	0	2	1	9.6	-1.0	0.0	0.0	0.0
74	1	0	2	2	1	5.6	-1.0	0.0	1.0	0.0
75	1	1	0	-2	1	-34.7	-1.0	0.0	0.0	0.0
76	0	1	0	2	0	14.2	-1.0	0.0	0.0	0.0
77	0	1	2	-2	0	117.5	-1.0	0.0	0.0	0.0
78	0	1	-2	2	0	-329.8	-1.0	0.0	0.0	0.0
79	1	0	-2	2	0	23.8	-1.0	0.0	0.0	0.0
80	1	0	-2	-2	0	-9.5	-1.0	0.0	0.0	0.0
81	1	0	2	-2	0	32.8	-1.0	0.0	0.0	0.0
82	1	0	0	-4	0	-10.1	-1.0	0.0	0.0	0.0
83	2	0	0	-4	0	-15.9	-1.0	0.0	0.0	0.0
84	0	0	2	4	2	4.8	-1.0	0.0	0.0	0.0
85	0	0	2	-1	2	25.4	-1.0	0.0	0.0	0.0
86	-2	0	2	4	2	7.3	-1.0	0.0	1.0	0.0

i	k_{i1}	k_{i2}	k_{i3}	k_{i4}	k_{i5}	Period	A_{0j}	A_{1j}	B_{0j}	B_{1j}
87	2	0	2	2	2	4.7	-1.0	0.0	0.0	0.0
88	0	-1	2	0	1	14.2	-1.0	0.0	0.0	0.0
89	0	0	-2	0	1	-13.6	-1.0	0.0	0.0	0.0
90	0	0	4	-2	2	12.7	1.0	0.0	0.0	0.0
91	0	1	0	0	2	409.2	1.0	0.0	0.0	0.0
92	1	1	2	-2	2	22.5	1.0	0.0	-1.0	0.0
93	3	0	2	-2	2	8.7	1.0	0.0	0.0	0.0
94	-2	0	2	2	2	14.6	1.0	0.0	-1.0	0.0
95	-1	0	0	0	2	-27.3	1.0	0.0	-1.0	0.0
96	0	0	-2	2	1	-169.0	1.0	0.0	0.0	0.0
97	0	1	2	0	1	13.1	1.0	0.0	0.0	0.0
98	-1	0	4	0	2	9.1	1.0	0.0	0.0	0.0
99	2	1	0	-2	0	131.7	1.0	0.0	0.0	0.0
100	2	0	0	2	0	7.1	1.0	0.0	0.0	0.0
101	2	0	2	-2	1	12.8	1.0	0.0	-1.0	0.0
102	2	0	-2	0	1	-943.2	1.0	0.0	0.0	0.0
103	1	-1	0	-2	0	-29.3	1.0	0.0	0.0	0.0
104	-1	0	0	1	1	-388.3	1.0	0.0	0.0	0.0
105	-1	-1	0	2	1	35.0	1.0	0.0	0.0	0.0
106	0	1	0	1	0	27.3	1.0	0.0	0.0	0.0

Table 1: Coefficients A_{0j} , A_{1j} , B_{0j} , B_{1j} for IAU1980 nutation model.

2.2.3 Conversion Between ToD to PEF Frames

The conversion between the ToD and PEF is determined by the *Earth Rotation Matrix*

$$R = R_z(\text{GAST}), \quad (29)$$

where GAST is the Greenwich Apparent Sidereal Time obtained from (1)

$$\text{GAST} = \text{GMST} - \alpha_E, \quad (30)$$

where

$$\alpha_E = \tan^{-1} \left(\frac{N_{12}}{N_{11}} \right). \quad (31)$$

To obtain a different representation of GMST, let us combine (4) and (5):

$$\begin{aligned} \text{GMST} &= \text{GMST}_0 + c \cdot \text{UT1} \\ &= b_0 + b_1 T_u + b_2 T_u^2 + b_3 T_u^3 + c \cdot \text{UT1} \end{aligned} \quad (32)$$

Conversion of the constants into degrees yields

$$\begin{aligned} b_0 &= 100.460\,618\,375^\circ \\ b'_1 &:= b_1/36525.0 = 0.985\,647\,366^\circ \end{aligned}$$

For the constant c , we can compute

$$\begin{aligned} c \cdot \text{UT1} &= 360.9856473662862^\circ \cdot (JT - JD) \\ &= (360^\circ + b'_1)(JT - JD) \end{aligned} \quad (33)$$

Substituting this back, yields

$$GMST = b_0 + b'_1(JD - JD_{2000}^{noon}) + (360^\circ + b'_1)(JT - JD) + b_2T_u^2 + b_3T_u^3,$$

where $JD_{2000}^{noon} = 2\,451\,545$ corresponds to the Julian UT1 date at January 1, 2000 12:00:00. The preceding midnight corresponds to a value $JD_{2000} = 2\,451\,544.5 = JD_{2000}^{noon} - 0.5$. Taking into account to modulo arithmetic of angles

$$\begin{aligned} (360^\circ + b'_1)(JT - JD) &= (360^\circ + b'_1)(JT - JD_{2000}) + (360^\circ + b'_1)(JD_{2000} - JD) \\ &\stackrel{m}{=} (360^\circ + b'_1)(JT - JD_{2000}) + b'_1(JD_{2000} - JD). \end{aligned}$$

Thus, we obtain

$$\begin{aligned} GMST &= b_0 + b'_1(JD - JD_{2000} - 0.5) + (360^\circ + b'_1)(JT - JD_{2000}) + b'_1(JD_{2000} - JD) + .. \\ &= b_0 - \frac{b'_1}{2} + (360^\circ + b'_1)(JT - JD_{2000}) + b_2T_u^2 + b_3T_u^3. \end{aligned} \quad (34)$$

Substituting the values, yields

$$GMST \approx 100.460\,618\,375^\circ + 360.985\,647\,366^\circ(JT - JD_{2000}) \quad (35)$$

$$+ 2.90788^\circ \cdot 10^{-13}(JT - JD_{2000})^2 - 5.3016^\circ \cdot 10^{-22}(JT - JD_{2000})^3. \quad (36)$$

2.2.4 Conversion Between PEF and EFI Frames

The conversion between the PEF and EFI is determined by the *Polar Motion Matrix*

$$R_M = R_y(-x_p)R_x(-y_p), \quad (37)$$

where x_p and y_p are angles that can be obtained from the IERS Bulletin A.

2.2.5 Conversion of Velocities

For Earth-centered frames, the coordinate transformations between frames are rotations. Thus, if the relationship between frames 1 and 2 can be written

$$\mathbf{r}^2 = R\mathbf{r}^1 \quad (38)$$

the conversion between velocities can be expressed as

$$\mathbf{v}^2 = R\mathbf{v}^1 + \frac{dR}{dt}\mathbf{r}^1. \quad (39)$$

For all such conversions except the ToD \leftrightarrow PEF transformation, dR/dt is in order of arcseconds per year and can be ignored. For ToD \rightarrow PEF transformation,

$$\mathbf{r}_p = R_z(\text{GAST})\mathbf{r}_t \quad (40)$$

and

$$\mathbf{v}_p = R_z(\text{GAST})\mathbf{v}_t + \frac{dR_z}{dt}R_z(\text{GAST})\frac{d\text{GAST}}{dt}\mathbf{r}_t. \quad (41)$$

The GAST can be expanded as using (35)

$$\text{GAST} = \sum_{k=0}^3 \alpha_k (JT - JD_{2000})^k - \alpha_E. \quad (42)$$

Time-derivative of this be written as

$$\frac{d\text{GAST}}{dt} = \frac{1}{86400} \sum_{k=1}^3 k\alpha_k (JT - JD_{2000})^{k-1}. \quad (43)$$

Thereafter, denoting $\theta = \text{GAST}$, we obtain

$$\mathbf{v}_p = R_z(\text{GAST})\mathbf{v}_t + \frac{1}{86400} \frac{2\pi}{360} \sum_{k=1}^3 k\alpha_k (JT - JD_{2000})^{k-1} \begin{bmatrix} -\text{sind}(\theta) & \text{cosd}(\theta) & 0 \\ -\text{cosd}(\theta) & -\text{sind}(\theta) & 0 \\ 0 & 0 & 0 \end{bmatrix} \mathbf{r}_t, \quad (44)$$

where $\alpha_1 = 360.985\,647\,366^\circ$ $\alpha_2 = 2.90788^\circ \cdot 10^{-13}$ $\alpha_3 = -5.3016^\circ \cdot 10^{-22}$.

2.3 Topocentric Systems

Topocentric systems are centered on a fixed point on the surface of the Earth. Most relevant topocentric systems are *Local Tangent Plane* (LTP) coordinates, where the axes are fixed to the local tangent plane to form an RHS system. Depending on the required accuracy, a tangent plane, a sphere, a reference ellipsoid, geoid or a digital elevation model can be used to model the surface.

2.3.1 Surface Approximations

There is no unique definition for the surface of the Earth nor height of topographic features. To first approximation, the surface can be approximated as a sphere. However, the surface is flattened at the poles and bulges out the equator, which can be approximated by an ellipsoid. The World Geodetic System 1984 (WGS84) defines such a reference ellipsoid and also an associated geoid. Both are used reference surfaces, that is, *geodetic datums* to measure the height of the surface variations.

The geoid is an expression *mean sea level* (MSL) in terms of spherical harmonics selected based on the Earth Gravitational Model 2008. MSL expresses the hypothetical time-averaged sea level, which would occur at a specific location of sea or when a canal was digged to specific location. Height w.r.t. MSL is called *orthometric height*.

Earth observation satellites typically use *ellipsoid height* w.r.t. the *WGS84 ellipsoid*:

$$\text{Semi-major axis}(a) = 6\,378\,137.0 \text{ m} \quad (45)$$

$$\text{Semi-minor axis}(b) = 6\,356\,752.314\,245 \text{ m} \quad (46)$$

$$\text{Eccentricity}(e) = \sqrt{(a^2 - b^2)}/a = 0.081819190842965, \quad (47)$$

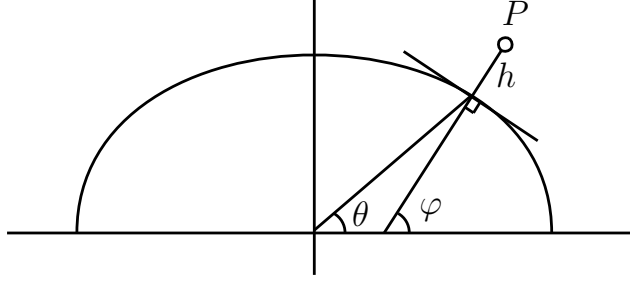


Figure 4: Geocentric θ vs geodetic φ latitude.

where the semi-major and semi-minor axes are associated to the equator and the poles, respectively.

Cartesian coordinates in the EFI frame is related to the *geodetic latitude* φ , *geodetic longitude* λ and *height above the ellipsoid* as follows [1]:

$$x = (N + h) \cos \varphi \cos \lambda \quad (48)$$

$$y = (N + h) \cos \varphi \sin \lambda \quad (49)$$

$$z = ((1 - e^2)N + h) \sin \varphi, \quad (50)$$

where

$$N = \frac{a}{\sqrt{1 - e^2 \sin^2 \varphi}}. \quad (51)$$

The longitude can be computed from the cartesian EFI coordinates with

$$\lambda = \text{atan2}(y, x). \quad (52)$$

For very distant objects such as stars, the angle between geocentric and geodetic latitude is small. When $h \gg a$ holds, we have $h \gg N$ and

$$x = r \cos \varphi \cos \lambda \quad (53)$$

$$y = r \cos \varphi \sin \lambda \quad (54)$$

$$z = r \sin \varphi \quad (55)$$

where $r = h + a$. This allows solution

$$\varphi = \arcsin \left(\frac{z}{h + a} \right) \quad (56)$$

For nearby objects, the latitude and height are obtained with the following iteration [1]: The initial value is given by:

$$\varphi_{(0)} = \left(\frac{z / \sqrt{x^2 + y^2}}{1 - e^2} \right) \quad (57)$$

The iteration is given by:

$$N_{(i)} = \frac{a}{\sqrt{1 - e^2 \sin^2 \varphi_{(i-1)}}}, \quad (58)$$

$$h_{(i)} = \frac{p}{\cos \varphi_{(i-1)}} - N_{(i)}, \quad (59)$$

$$\varphi_{(i)} = \arctan \left[\frac{z / \sqrt{x^2 + y^2}}{1 - \frac{N_{(i)}}{N_{(i)} + h_{(i)}} e^2} \right]. \quad (60)$$

2.3.2 Topocentric-Horizontal Frame

Topographic East-North-Up (ENU) system is a topocentric system, where the RHS basis vectors point to the East, North and Up, respectively. The ENU basis vectors can be expressed in EFI as:

$$[\hat{\mathbf{e}} \quad \hat{\mathbf{n}} \quad \hat{\mathbf{u}}] = \begin{bmatrix} -\sin \lambda & -\cos \lambda \sin \varphi & \cos \lambda \cos \varphi \\ \cos \lambda & -\sin \lambda \sin \varphi & \sin \lambda \cos \varphi \\ 0 & \cos \varphi & \sin \varphi \end{bmatrix} \quad (61)$$

where λ and φ are the *longitude* and *geodetic latitude*.

Let us write positions in EFI w.r.t. the point P on the surface of WGS84

$$\mathbf{r}_{EFI} = \mathbf{r}_{P,EFI} + \Delta \mathbf{r}_{EFI}. \quad (62)$$

The vector $-\mathbf{r}_{P,EFI}$ is the translation from the origin of the EFI to the origin of ENU expressed in EFI. If we denote with T the rotation from *EFI* to *ENU*, then

$$\Delta \mathbf{r}_{EFI} = T^{-1} \Delta \mathbf{r}_{ENU}, \quad (63)$$

where

$$T^{-1} = R_3 [-(\pi/2 + \lambda)] R_1 [-(\pi/2 - \varphi)] = \begin{bmatrix} -\sin \lambda & -\cos \lambda \sin \varphi & \cos \lambda \cos \varphi \\ \cos \lambda & -\sin \lambda \sin \varphi & \sin \lambda \cos \varphi \\ 0 & \cos \varphi & \sin \varphi \end{bmatrix}. \quad (64)$$

This implies

$$T = R_1(\pi/2 - \varphi) R_3(\pi/2 + \lambda) \quad (65)$$

and

$$\mathbf{r}_{ENU} = P(\mathbf{r}_{EFI} - \mathbf{r}_{P,EFI}) \quad (66)$$

2.3.3 Azimuth and Elevation

Azimuth and elevation are computed clockwise from the North direction. That is, for $\mathbf{r}_{ENU} = (r_E, r_N, r_U)$, the azimuth and elevation can be computed with:

$$A = \text{atan2d}(r_E, r_N), \quad (67)$$

$$E = \text{asind}(r_U / |\mathbf{r}_{ENU}|) \quad (68)$$

respectively.

2.4 Keplerian Elements

Keplerian orbits are solutions to the *two-body problem*

$$\ddot{\mathbf{r}} = -\frac{\mu}{r^3}\mathbf{r} \quad (69)$$

in an inertial frame, where $\mathbf{r} = \mathbf{r}_m - \mathbf{r}_M$ is the relative position vector of the smaller mass. $\mu = G(m + M) \approx GM$ is *standard gravitational parameter*.

Keplerian orbits are described via a set of *Keplerian elements*:

- Ω is the *right ascension of the ascending node*,
- i is the *inclination of the orbital plane*,
- ω is the *argument of perigee or perihelion* depending whether the body is a satellite or a planet, respectively,
- a is the *semi-major axis* of the orbit,
- e is the *eccentricity* of the orbit,
- T_0 is the *perigee passing time*.

In case of more than two bodies or non-spherical objects, the two-body problem is an approximation. In most applications discussed in this document, there is one massive body and contributions to the orbit of a smaller body from other bodies are small. Error sources w.r.t. the two-body problem are called *perturbations*.

At any moment in time, the *orbit state vector* $(t, \mathbf{r}, \dot{\mathbf{r}})$ of a body can be used to compute *osculating (Keplerian) elements* for a the Keplerian (two-body) orbit. When there are no perturbations, the osculating elements reproduce the orbit exactly.

2.4.1 Perifocal Coordinate System

Perifocal coordinate (PQW) system has a origin at the focus of the orbit and the axes are defined as follows:

- The P axis points to the periapsis.
- The Q axis points to true anomaly of 90° .
- The W axis is orthogonal to the orbital plane.

In PQF frame, the position of a satellite can be written (see Figure 5):

$$\mathbf{r}_{PQF} = \begin{bmatrix} a(\cos E - e) \\ b \sin E \\ 0 \end{bmatrix} = |r| \begin{bmatrix} \cos f \\ \sin f \\ 0 \end{bmatrix}, \quad (70)$$

where a, b, e, E, f are the semi-major axis, semi-minor axis, eccentricity and eccentric anomaly, natural anomaly, respectively.


$$\frac{dM^d}{dt} = \frac{d}{dt} \left(E^d - \frac{180^\circ}{\pi} e \sin \frac{\pi E^d}{180^\circ} \right) = (1 - e \cos d E^d) \frac{dE^d}{dt}. \quad (71)$$
$$n := \frac{dM^d}{dt} = \frac{360^\circ}{T} = \frac{180^\circ}{\pi} \sqrt{\frac{\mu}{a^3}}. \quad (72)$$
$$\frac{dE^d}{dt} = \frac{n}{1 - e \cos d E^d}. \quad (73)$$
$$\mathbf{v}_{PQF} = \frac{dE^d}{dt} \begin{bmatrix} -a \sin dE^d \\ b \cos dE^d \\ 0 \end{bmatrix} = \frac{dE^d}{dt} \frac{\pi}{180^\circ} \begin{bmatrix} -a \sin dE^d \\ b \cos dE^d \\ 0 \end{bmatrix} = \frac{\sqrt{\frac{\mu}{a^3}}}{1 - e \cos dE^d} \begin{bmatrix} -a \sin dE^d \\ b \cos dE^d \\ 0 \end{bmatrix}. \quad (74)$$
$$\mathbf{v} = R_z(-\Omega)R_x(-i)R_z(-\omega)\mathbf{v}_{PQF} \quad (76)$$

17

2.4.3 Solution of the Kepler Equation

Suppose orbital elements $(a, e, i, \Omega, \omega, M)$ are known at specific time. The eccentric anomaly is solved from the *Kepler Equation*:

$$M = E - e \sin E. \quad (77)$$

The equation (77) is expressed in radians. In degrees,

$$M^d = E^d - \frac{180^\circ}{\pi} e \sin E^d. \quad (78)$$

This corresponds to a Newton-Raphson iteration

$$E_{n+1}^d = E_n^d - \frac{M_n^d - E_n^d + (180^\circ e / \pi) \sin E_n^d}{e \cos(E_n^d) - 1}. \quad (79)$$

Thereafter, the position can be calculated using (70) and (75).

2.4.4 Computation of Osculating Elements

Since every OSV corresponds to a unique Keplerian orbit, osculating elements can be solved from the OSV. The following discussion describes how osculating elements can be computed in (approximately) inertial coordinate system, where $\hat{\mathbf{z}}$ is parallel to the equatorial or ecliptic plane.

For elliptic orbits, the semi-major axis can be written using the *specific orbital energy* $E = v^2/2 - \mu/r$:

$$a = -\frac{\mu}{2E} = \frac{\mu}{2} \left(\frac{1}{2}v^2 - \frac{\mu}{r} \right)^{-1} = \left(\frac{v^2}{\mu} - \frac{2}{r} \right)^{-1}. \quad (80)$$

The *specific angular momentum* is defined as

$$\mathbf{h} := \mathbf{r} \times \mathbf{v}. \quad (81)$$

The inclination is obtained

$$i = \arccos \frac{h_z}{|\mathbf{h}|}. \quad (82)$$

The eccentricity vector is obtained directly from the theory of Keplerian orbits

$$\mathbf{e} = \frac{1}{\mu} \left[\left(v^2 - \frac{\mu}{r} \right) \mathbf{r} - (\mathbf{r} \cdot \mathbf{v}) \mathbf{v} \right] = \frac{\mathbf{v} \times \hat{\mathbf{z}}}{\mu} - \frac{\mathbf{r}}{|\mathbf{r}|}. \quad (83)$$

The semi-minor axis can be now computed

$$b = a \sqrt{1 - e^2}. \quad (84)$$

The *node vector* is defined as

$$\mathbf{n} := \frac{\hat{\mathbf{z}} \times \mathbf{h}}{|\hat{\mathbf{z}} \times \mathbf{h}|}. \quad (85)$$

The node vector is orthogonal to both the orbital and the equatorial/ecliptic planes. It is parallel to the direction associated to the ascending node. The intersection with the equatorial/ecliptic plane occurs at direction $\hat{\mathbf{n}} = (\cos \Omega, \sin \Omega, 0)$. Thus,

$$\Omega = \text{atan2}(n_y, n_x) = \text{atan2}(h_x, -h_y). \quad (86)$$

The eccentricity vector can be written

$$R_z(-\omega)R_x(-i)R_z(-\omega) \begin{bmatrix} a(1-e) \\ 0 \\ 0 \end{bmatrix} = a(1-e) \begin{bmatrix} \cos \Omega \cos \omega - \sin \Omega \cos i \sin \omega \\ \sin \Omega \cos \omega + \cos \Omega \cos i \sin \omega \\ \sin i \sin \omega \end{bmatrix} = \begin{bmatrix} e_x \\ e_y \\ e_z \end{bmatrix}. \quad (87)$$

In case of $\sin i = 0$, this reduces to

$$\begin{bmatrix} \cos \Omega \cos \omega - \sin \Omega \sin \omega \\ \sin \Omega \cos \omega + \cos \Omega \sin \omega \\ 0 \end{bmatrix} = \begin{bmatrix} \cos(\Omega + \omega) \\ \sin(\Omega + \omega) \\ 0 \end{bmatrix} = \begin{bmatrix} e_x/a \\ e_y/a \\ 0 \end{bmatrix} \quad (88)$$

This yields

$$\omega = \text{atan}(e_y, e_x) - \Omega, \quad \text{when } \sin i = 0. \quad (89)$$

When $\sin i \neq 0$, we obtain

$$\frac{e_z}{\sin i} = \sin \omega. \quad (90)$$

Also depending on the value of Ω , we obtain the relations

$$\frac{1}{\cos \Omega} \left(e_x + \frac{\sin \Omega \cos i}{\sin i} e_z \right) = \cos \omega \quad (91)$$

$$\frac{1}{\sin \Omega} \left(e_y - \frac{\cos \Omega \cos i}{\sin i} e_z \right) = \sin \omega \quad (92)$$

and finally

$$\omega = \begin{cases} \text{atan2} \left(\frac{e_z}{\sin i}, \frac{1}{\cos \Omega} \left[e_x + \frac{\sin \Omega}{\tan i} e_z \right] \right), & \cos \Omega \neq 0 \\ \text{atan2} \left(\frac{e_z}{\sin i}, \frac{1}{\sin \Omega} \left[e_y - \frac{\cos \Omega}{\tan i} e_z \right] \right), & \sin \Omega \neq 0 \end{cases} \quad (93)$$

To obtain the eccentric anomaly, we note

$$\begin{bmatrix} \xi \\ \eta \\ 0 \end{bmatrix} = \begin{bmatrix} a(\cos E - e) \\ b \sin E \\ 0 \end{bmatrix} = R_z(\omega)R_x(i)R_z(\Omega)\mathbf{r}, \quad (94)$$

which allows us to solve

$$E = \text{atan2}(\eta/b, \xi/a + e). \quad (95)$$

The mean anomaly then follows from the Kepler equation.

2.5 Orbital Coordinate Systems

3 Position of the Planets and the Moon

4 Implementation and Validation

References

- [1] E. Suirana, J. Zoronoza, M. Hernandez-Pajares, “GNSS Data Processing - Volume I: Fundamentals and Algorithms”, European Space Agency, 2013.
- [2] J. Seago, D. Vallado, “Coordinate Frames of The U.S. Space Object Catalogs”, AIAA Publication 2000-4025, Astrodynamics Specialist Conference, Denver CO, Aug. 2000.