
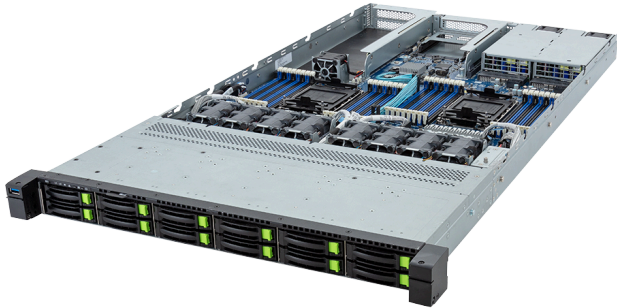



# R183-SF1-AAJ1

Rack Server - 1U DP 1 x PCIe Gen5 GPU



### Key Features

- Supports 1 x Dual slot Gen5 GPU
- Dual 5th/4th Gen Intel® Xeon® Scalable Processors
- Dual Intel® Xeon® CPU Max Series
- 8-Channel DDR5 RDIMM, 32 x DIMMs
- Dual ROM Architecture
- 12 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swap bays
- 1 x FHFL PCIe Gen5 x16 slot for GPUs
- 1 x FHFL PCIe Gen5 x16 slot
- 1 x FHHL PCIe Gen5 x16 slot
- 1 x OCP NIC 3.0 Gen5 x16 slot
- 1+1 2000W 80 PLUS Titanium redundant power supplies

### Applications

AI Platform, AI Training Server, AI Inference Server, Visual Computing, High-Performance Computing Server, Servers for Hybrid/Private Cloud...

### Specification

|                  |                                                                                                                                                                                                                                        |                       |                                                                                                                                                                                                                 |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions       | 1U (W438 x H43.5 x D815 mm)                                                                                                                                                                                                            | PCIe Expansion Slots  | 1 x FHFL PCIe Gen5 x16, for GPUs<br>1 x FHFL PCIe Gen5 x16 <sup>[1]</sup><br>1 x FHHL PCIe Gen5 x16<br>1 x OCP NIC 3.0 PCIe Gen5 x16, Support NCSI<br><sup>[1]</sup> Blocked when a Dual slot GPU is installed. |
| Motherboard      | MSF3-GP0                                                                                                                                                                                                                               | I/O Ports             | <b>Front:</b><br>1 x USB 3.2 Gen1<br><b>Rear:</b><br>2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x MLAN                                                                                                                    |
| CPU              | 5th Generation Intel® Xeon® Scalable Processors<br>4th Generation Intel® Xeon® Scalable Processors<br>Intel® Xeon® CPU Max Series<br>Dual processor, TDP up to 350W                                                                    | Backplane Board       | PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s                                                                                                                                                                      |
| OS Compatibility | <a href="#">OS Support List</a>                                                                                                                                                                                                        | TPM                   | 1 x TPM header (SPI), Optional TPM2.0 kit: CTM010                                                                                                                                                               |
| Socket           | 2 x LGA 4677 (Socket E)                                                                                                                                                                                                                | Power Supply          | 1+1 2000W 80 PLUS Titanium redundant power supplies<br>AC Input: 100-240V                                                                                                                                       |
| Chipset          | Intel® C741                                                                                                                                                                                                                            | System Management     | ASPEED® AST2600 Baseboard Management Controller<br>GIGABYTE Management Console web interface                                                                                                                    |
| Memory           | 8-Channel DDR5 RDIMM, 32 x DIMMs<br>[5th Gen Intel Xeon] Up to 5600 MT/s (1DPC), 4400 MT/s (2DPC)<br>[4th Gen Intel Xeon] Up to 4800 MT/s (1DPC), 4400 MT/s (2DPC)<br>[Intel Xeon Max Series] Up to 4800 MT/s (1DPC), 4400 MT/s (2DPC) | System Fans           | 1 x 40x40x28mm (34,000rpm)<br>8 x 40x40x56mm (32,000rpm)                                                                                                                                                        |
| LAN              | 1 x 10/100/1000 Mbps Management LAN                                                                                                                                                                                                    | Operating Properties  | Operating: 10°C~30°C, 8%~80% (non-condensing)<br>Non-operating: -40°C~60°C, 20%~95% (non-condensing)                                                                                                            |
| Video            | Integrated in ASPEED® AST2600<br>- 1 x Mini-DP                                                                                                                                                                                         | Packaging Content     | 1 x R183-SF1-AAJ1<br>2 x CPU heatsinks<br>1 x Mini-DP to D-Sub cable<br>1 x GPU power cable (12VHPWR, 100mm)<br>6 x Carriers<br>1 x 2-Section Rail kit                                                          |
| Storage          | <b>Front hot-swap:</b><br>12 x 2.5" Gen5 NVMe/SATA/SAS-4 <sup>[1]</sup><br><sup>[1]</sup> SAS card is required to support SAS drives.                                                                                                  | Ordering Part Numbers | 6NR183SF1DR000ABJ1*                                                                                                                                                                                             |
| RAID             | Intel® SATA RAID 0/1/10/5<br>Onboard VROC key header<br>Support optional RAID add-in cards                                                                                                                                             | Optional Parts        | - 3-Section Rail kit (Supports CMA): 25HB2-A56121-K0R<br>- Cable Management Arm: 25HB1-R18300-K0R                                                                                                               |



Learn more at: <https://www.gigabyte.com/Enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.  
\* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

