

# IoT SuperServer SYS-110P-FRDN2T

Intel Xeon Socket P+ (LGA-4189) support 3rd Gen, 600W -48 Vdc redundant PWS, 1U edge platform



## Key Applications

Multi-Access Edge Computing (MEC), VRAN/ORAN for Telecom, Edge AI,


## Key Features

- Socket P+ (LGA-4189) support 3rd Gen Intel® Xeon® Scalable processors;
- 8x DIMMs; Up to 2TB 3DS ECC DDR4-3200: RDIMM/LRDIMM;
- 2x PCIe Gen4 x16 FHFL slot;
- 2x 2.5" drive bays; 1x M.2 NVMe OR 1x M.2 SATA3;
- 5x hot-swappable counter rotated fans with optimal fan speed control;
- Redundant 600W DC Power Supplies;
- Front-access I/O: 2x 10GBase-T, 1x Dedicated IPMI, 2x USB3.0, 2x USB2.0, 1x COM, 1x VGA;



|                          |                                                                                                                                                                          |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Form Factor              | 1U<br>Enclosure: 437 x 43 x 399mm (17.2" x 1.7" x 15.7")<br>Package: 686 x 203 x 610mm (27" x 8" x 24")                                                                  |
| Processor                | Single Socket P+ (LGA-4189)<br>3rd Gen Intel® Xeon® Scalable processors<br>Up to 32C/64T; Up to 48MB Cache                                                               |
| System Memory            | Slot Count: 8 DIMM slots<br>Max Memory (2DPC): Up to 2TB 3200MT/s ECC DDR4 RDIMM/LRDIMM                                                                                  |
| Drive Bays Configuration | Default: Total 2 bays <ul style="list-style-type: none"> <li>• 2 internal fixed 2.5" SATA drive bays</li> </ul> M.2: 1 M.2 PCIe 3.0 x4 NVMe/SATA slot (M-key 2280/22110) |
| Expansion Slots          | Default <ul style="list-style-type: none"> <li>• 2 PCIe 4.0 x16 FHFL slots</li> </ul>                                                                                    |
| On-Board Devices         | SATA: SATA (6Gbps) ; RAID 0/1 support<br>Network Connectivity: 2 RJ45 10GBASE-T with Intel® X550                                                                         |
| Input / Output           | LAN: 2 RJ45 10 GbE LAN ports<br>USB: 2 USB 3.0 Type-A ports<br>2 USB 2.0 Type-A ports<br>Video: 1 VGA port                                                               |

(Front View – System)

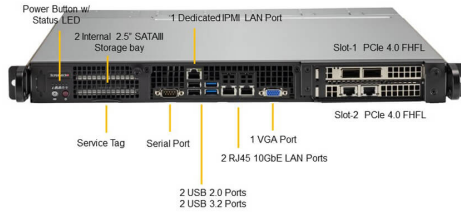

(Rear View – System)



|                       |                                                                                                                                                                                                                                                                              |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Cooling        | Fans: Up to 5 heavy duty fans with optimal fan speed control<br>Air Shroud: 1 Air Shroud                                                                                                                                                                                     |
| Power Supply          | 1x 600W Redundant Typical 90%+ Level (92%) power supply                                                                                                                                                                                                                      |
| Management            | SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!                                   |
| PC Health Monitoring  | CPU: Monitors for CPU Cores, Chipset Voltages, Memory<br>FAN: Fans with tachometer monitoring<br>Pulse Width Modulated (PWM) fan connectors<br>Status monitor for speed control<br>Temperature: CPU thermal trip support, PEPI<br>Monitoring for CPU and chassis environment |
| Dimensions and Weight | Weight: Gross Weight: 18 lbs (8.16 kg)<br>Available Color: Black                                                                                                                                                                                                             |
| Operating Environment | Operating Temperature: 0°C to 40°C (32°F to 104°F)<br>Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)<br>Operating Relative Humidity: 8% to 90% (non-condensing)<br>Non-operating Relative Humidity: 5% to 95% (non-condensing)                                    |
| Motherboard           | <a href="#">Super X12SPW-TF</a>                                                                                                                                                                                                                                              |
| Chassis               | <a href="#">CSE-515M-R601</a>                                                                                                                                                                                                                                                |