

# IoT SuperServer SYS-112D-42C-FN8P

1U Compact Telco Edge Server ft. Intel® Xeon® 6 SoC



## Key Applications


Multi-Access Edge Computing (MEC), Telco Edge, DU of 5G Application, Satellite Communication, VRAN/ORAN for Telecom, Edge AI,

## Key Features

- Intel® Xeon® 6 SoC 6726P-B, CPU TDP 235W, Intel Quick Assist Technology, Intel vRAN Accelerator;
- Up to 4 DIMMs supporting up to 512GB DDR5-6400;
- Up to 2 PCIe 5.0 x16 FHHL slots;
- 8 SFP28 25GbE
  - 2 SMA for 1PPS (1 Input 1 Output)
  - 1x SMA for GNSS input with onboard GNSS module;
- IEEE1588 v2 & Synchronous Ethernet support
  - DPLL/OCXO design
  - Up to 8 hours hold-over;
- Up to 2 internal fixed 2.5" U.2 NVMe drives;
- Support for up to 1 single-width PCIe GPU accelerator cards;



|                          |                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Form Factor              | 1U Rackmount<br>Enclosure: 437 x 43 x 399mm (17.2" x 1.7" x 15.7")<br>Package: 686 x 203 x 610mm (27" x 8" x 24")                                                                                                                                                                                                                                |
| Processor                | Intel® Xeon® 6 SoC<br>42C/84T; 168MB Cache                                                                                                                                                                                                                                                                                                       |
| GPU                      | Up to 1 single-width GPU                                                                                                                                                                                                                                                                                                                         |
| System Memory            | Slot Count: 4 DIMM slots/4 Channels<br>Max Memory (1DPC): 512GB 6400MT/s ECC DDR5 RDIMM                                                                                                                                                                                                                                                          |
| Drive Bays Configuration | Default: Total 2 bays <ul style="list-style-type: none"> <li>• 2 internal fixed 2.5" NVMe drive bays</li> </ul> M.2: 1 M.2 PCIe 4.0 x2 NVMe slot (M-key 2280(default))                                                                                                                                                                           |
| Expansion Slots          | Default <ul style="list-style-type: none"> <li>• 2 PCIe 5.0 x16 (in x16) FHHL slots</li> </ul>                                                                                                                                                                                                                                                   |
| On-Board Devices         | 8 SFP28 25GbE with Intel® SoC                                                                                                                                                                                                                                                                                                                    |
| Input / Output           | LAN: 1 RJ45 1 GbE LAN port (Intel® I210-IT) (IPMI shared on LAN port 1)<br>8 SFP28 25 GbE LAN ports (Intel® SOC) (IPMI shared on LAN port 1)<br>USB: 2 USB 3.2 Gen1 Type-A ports(front)<br>Video: 1 mini-DP port<br>TPM: 1 TPM header<br>1 TPM Onboard/port 80<br>Others: 1 Dry contact (4 sets) port<br>3 SMA (GNSS / 1PPS in / 1PPS out) ports |

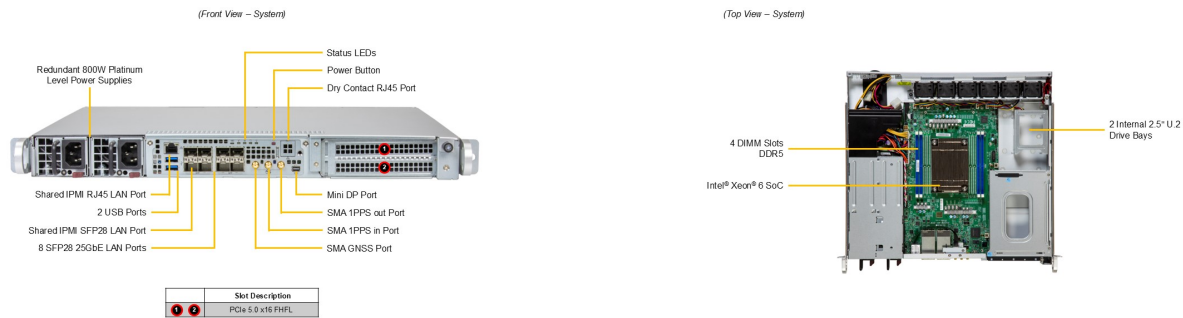

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Cooling        | Fans: Up to 6x 4cm heavy duty fans with optimal fan speed control<br>Air Shroud: 2 Air Shrouds                                                                                                                                                                                                                                                                                                                                                                                                                |
| Power Supply          | 2x 800W Redundant (1 + 1) Platinum Level (94%) power supplies                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| System BIOS           | BIOS Type: AMI 64MB SPI Flash EEPROM                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Management            | SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!                                                                                                                                                                                                                                                                                                                                      |
| PC Health Monitoring  | CPU: Monitors for CPU Cores, +3.3V, +5V, +12V, +3.3V Standby, +5V Standby, VBAT, Memory, Chipset Voltages.<br>FAN: Fans with tachometer monitoring<br>Pulse Width Modulated (PWM) fan connectors<br>Status monitor for speed control<br>Temperature: Monitoring for CPU and chassis environment<br>Thermal Control for fan connectors<br>Voltage:<br>Voltage, VBAT, Memory temperature, CPU temperature, 3.3V standby, +5V standby, +5V, +3.3V, +12V, VRM temperature, CPU thermal trip support, 1.8V standby |
| Dimensions and Weight | Weight: Gross Weight: 29 lbs (13.15 kg)<br>Net Weight: 18 lbs (8.16 kg)<br>Available Color: No Paint                                                                                                                                                                                                                                                                                                                                                                                                          |
| Operating Environment | Operating Temperature: 0°C to 40°C (32°F to 104°F)<br>Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)<br>Operating Relative Humidity: 8% to 90% (non-condensing)<br>Non-operating Relative Humidity: 5% to 95% (non-condensing)                                                                                                                                                                                                                                                                     |
| Motherboard           | <a href="#">Super X14SDW-42C-SP9F</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Chassis               | CSE-515M2-R000NP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |