



# GPU SuperServer SYS-212GB-NR

UP Intel 2U PCIe GPU System with up to 2 NVIDIA RTX PRO™ 6000 Blackwell Server Edition or NVIDIA H200

## Key Applications



Scientific Research, Model analysis, High Performance Computing (HPC),  
Research Lab, Financial Services, Edge AI,

## Key Features

- Intel® Xeon® 6700 series processors, Single Socket, CPU TDP supports Up to 350W;
- Support up to 4 double-width PCIe GPU accelerator cards;
- Up to 2TB ECC RDIMM DDR5-6400MT/s and up to 512GB MRDIMM DDR5-8000MT/s in 16 DIMM slots;
- Up to 4 PCIe 5.0 x16 FHFL double-width + 3 PCIe 5.0 x16 FHFL slots;
- Up to 4 front hot-swap E1.S NVMe drive bays;
- 3 Redundant 2000W Titanium Level power supplies;
- 2U Rackmount chassis with 35.43" (900mm) depth;



|                          |                                                                                                                                                                                                                                                                  |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Form Factor              | 2U Rackmount<br>Enclosure: 438.4 x 88 x 900mm (17.25" x 3.46" x 35.43")<br>Package: (22.5" x 11" x 45.5")                                                                                                                                                        |
| Processor                | Single Socket E2 (LGA-4710)<br>Intel® Xeon® 6700/6500 series processors with P-cores<br>Up to 80C/160T; Up to 336MB Cache                                                                                                                                        |
| GPU                      | Max GPU Count: Up to 4 double-width GPUs<br>Supported GPU: NVIDIA PCIe: H200 NVL (141GB), NVIDIA RTX PRO™ 6000 Blackwell Server Edition<br>CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect<br>GPU-GPU Interconnect: NVIDIA® NVLink™ Bridge (optional) |
| System Memory            | Slot Count: 16 DIMM slots/8 Channels<br>Max Memory (1DPC): Up to 1TB 6400MT/s ECC DDR5 RDIMM<br>Max Memory (1DPC): Up to 512GB 8000MT/s ECC DDR5 MRDIMM<br>Max Memory (2DPC): Up to 2TB 5200MT/s ECC DDR5 RDIMM                                                  |
| Drive Bays Configuration | Default: Total 4 bays <ul style="list-style-type: none"> <li>• 4 front hot-swap E1.S NVMe drive bays</li> </ul> M.2: 2 M.2 PCIe 5.0 x2 NVMe slots (M-key 2280/22110)                                                                                             |
| Expansion Slots          | PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> <li>• 4 PCIe 5.0 x16 FHFL double-width slots</li> <li>• 3 PCIe 5.0 x16 FHFL slots</li> </ul> M.2: 2 M.2 PCIe 5.0 x2 NVMe slots (M-key 2280/22110)                                   |
| Input / Output           | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port<br>USB: 1 USB 3.0 Type-A port(Rear)<br>Video: 1 mini-DP port                                                                                                                                                            |

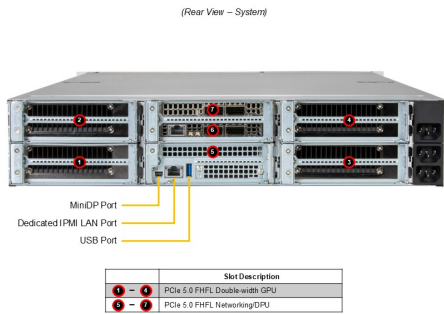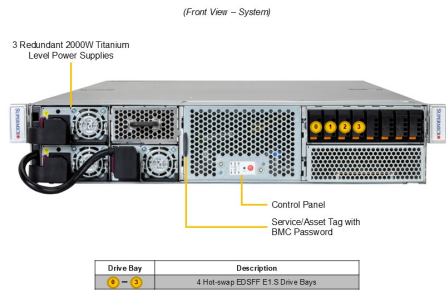

|                       |                                                                                                                                                                                                                                                                                                                           |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Cooling        | Fans: Up to 6x 6cm heavy duty fans with optimal fan speed control<br>Air Shroud: 1 Air Shroud                                                                                                                                                                                                                             |
| Power Supply          | 3x 2000W Redundant (2 + 1) Titanium Level (96%) power supplies                                                                                                                                                                                                                                                            |
| System BIOS           | BIOS Type: AMI 64MB SPI Flash EEPROM                                                                                                                                                                                                                                                                                      |
| Management            | SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!; Plug-ins for 3rd Party Software                                                                                                                 |
| PC Health Monitoring  | CPU: 8+4 Phase-switching voltage regulator<br>Monitors for CPU Cores, Chipset Voltages, Memory<br>FAN: Fans with tachometer monitoring<br>Pulse Width Modulated (PWM) fan connectors<br>Status monitor for speed control<br>Temperature: Monitoring for CPU and chassis environment<br>Thermal Control for fan connectors |
| Dimensions and Weight | Weight: Gross Weight: 84 lbs (38 kg)<br>Net Weight: 66 lbs (30 kg)<br>Available Color: Black front & silver body                                                                                                                                                                                                          |
| Operating Environment | Operating Temperature: 10°C to 35°C (50°F to 95°F)<br>Non-operating Temperature: -30°C to 60°C (-22°F to 140°F)<br>Operating Relative Humidity: 8% to 80% (max 21° DP; non-condensing)<br>Non-operating Relative Humidity: 8% to 90% (max 38° DP; non-condensing)                                                         |
| Motherboard           | <a href="#">Super X14SBGM</a>                                                                                                                                                                                                                                                                                             |
| Chassis               | CSE-GP201TS-R000NP                                                                                                                                                                                                                                                                                                        |