



# Hyper SuperServer SYS-112HA-TN

1U Hyper supporting up to 12 hot-swap 2.5" NVMe/SAS/SATA bays and 3 PCIe 5.0 x16 + 1 PCIe 5.0 x16 AIOM slots

## Key Applications

Virtualization, Financial, Scale Out All-Flash NVMe Storage, Data Center  
Enterprise Applications, Cloud Computing, AI Inference, CDN/vCDN/Cloud CDN,


## Key Features

- Hyper is a flagship performance rackmount server designed for scale-out cloud workloads.;
- Single Intel® Xeon® 6 6900 series Processor.;
- 12 DIMM slots support RDIMM / MRDIMM;
- Double width add-on card support.;
- Flexible networking options with 1 AIOM networking slot (OCP NIC 3.0 compatible).;
- Breeze through high throughput workloads with PCIe 5.0 NVMe drive support.;
- Trusted Platform Module (TPM) 2.0 onboard.;
- Modularized and Tool-less design for easy serviceability.;




|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Form Factor              | 1U Rackmount<br>Enclosure: 437 x 43 x 778.7mm (17.2" x 1.7" x 30.66")<br>Package: 672 x 224 x 1100mm (26.46" x 8.82" x 43.31")                                                                                                                                                                                                                                                                                                                                                                                              |
| Processor                | Single Socket BR (LGA-7529)<br>Intel® Xeon® 6900 series processors with P-cores<br>Up to 128C/256T; Up to 504MB Cache                                                                                                                                                                                                                                                                                                                                                                                                       |
| GPU                      | Max GPU Count: Up to 1 double-width or 2 single-width GPUs<br>CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect                                                                                                                                                                                                                                                                                                                                                                                                    |
| System Memory            | Slot Count: 12 DIMM slots<br>Max Memory (1DPC): Up to 3TB 6400MT/s ECC DDR5 RDIMM<br>Max Memory (1DPC): Up to 1.5TB 8800MT/s ECC DDR5 MRDIMM                                                                                                                                                                                                                                                                                                                                                                                |
| Drive Bays Configuration | Default: Total 8 bays <ul style="list-style-type: none"> <li>• 8 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays</li> </ul> Option A: Total 12 bays <ul style="list-style-type: none"> <li>• 8 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays</li> <li>• 4 front hot-swap 2.5" SAS*/SATA* drive bays</li> </ul> (*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details)<br>M.2: 2 M.2 NVMe slots (M-key 2280/22110/25110; VROC required for RAID) |
| Expansion Slots          | Default <ul style="list-style-type: none"> <li>• 1 PCIe 5.0 x16 FHHL slot</li> <li>• 1 PCIe 5.0 x16 FHFL slot</li> <li>• 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)</li> <li>• 1 PCIe 5.0 x8 FHFL slot</li> </ul>                                                                                                                                                                                                                                                                                                        |
| On-Board Devices         | NVMe: NVMe; RAID 0/1/5/10 support(Intel® VROC RAID key required)<br>Network Connectivity: Via AIOM                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Input / Output           | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port<br>USB: 2 USB 3.2 Gen1 ports(Rear)<br>1 USB 3.2 Gen1 port(Front)<br>Video: 1 VGA port                                                                                                                                                                                                                                                                                                                                                                                              |

(Front View – System)

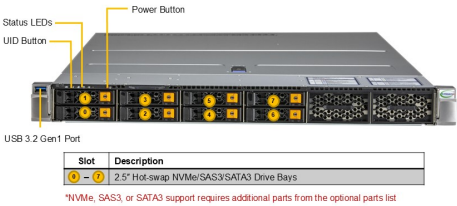

(Rear View – System)

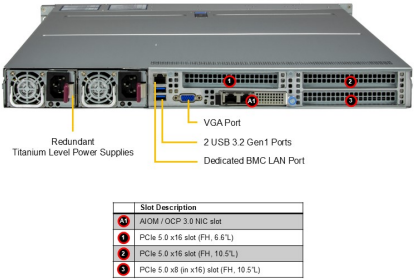

|                       |                                                                                                                                                                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Cooling        | Fans: Up to 8 counter-rotating 40x40x56mm Fan(s)                                                                                                                                                                                                                                 |
| Power Supply          | 2x 1200W Redundant (1 + 1) Titanium Level (96%) power supplies                                                                                                                                                                                                                   |
| System BIOS           | BIOS Type: AMI 64MB SPI Flash                                                                                                                                                                                                                                                    |
| Management            | SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!                                                                                                         |
| PC Health Monitoring  | CPU: Monitors for CPU Cores, Chipset Voltages, Memory<br>FAN: Fans with tachometer monitoring<br>Pulse Width Modulated (PWM) fan connectors<br>Status monitor for speed control<br>Temperature: Monitoring for CPU and chassis environment<br>Thermal Control for fan connectors |
| Dimensions and Weight | Weight: Gross Weight: 41.4 lbs (18.8 kg)<br>Net Weight: 19.2 lbs (8.7 kg)<br>Available Color: Silver                                                                                                                                                                             |
| Operating Environment | Operating Temperature: 10°C to 35°C (50°F to 95°F)<br>Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)<br>Operating Relative Humidity: 8% to 90% (non-condensing)<br>Non-operating Relative Humidity: 5% to 95% (non-condensing)                                        |
| Motherboard           | <a href="#">Super X14SBH-AP</a>                                                                                                                                                                                                                                                  |
| Chassis               | CSE-HS101-R000NFP                                                                                                                                                                                                                                                                |