

# Mainstream A+ Server AS -2015A-TR

2U UP Mainstream with up to 8 hot-swap 3.5" SAS/SATA bays, 2 PCIe 5.0 x16 slots (can be configured as 16/NA or 8/8) and 1 PCIe 4.0 x4 slot



More details here

## Key Applications

Designed for financial companies, AMD Xilinx Solarflare X2 and X3 Ethernet adapters validated,

## Key Features

- AMD EPYC™ 4004 / 4005 or Ryzen™ 7000 / 9000 series LGA1718 up to 170W TDP Processors;
- 4 DDR5-5200 UDIMM ECC/Non-ECC slots supporting up to 192GB memory;
- 2 PCIe 5.0 x16 HHHL slots (16/NA or 8/8);
- IPMI 2.0 + KVM with Dedicated LAN (1GbE)  
Dual 1GbE LAN (Intel® I210-AT);
- 800W High-Efficiency Power Supply Titanium Level Certified;




|                          |                                                                                                                                                                                                                                |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Form Factor              | 2U<br>Enclosure: 437 x 89 x 647mm (17.2" x 3.5" x 25.5")<br>Package: 678 x 290 x 876mm (26.7" x 11.4" x 34.5")                                                                                                                 |
| Processor                | Single processor(s)<br>AMD EPYC™ 4004 / 4005 or AMD Ryzen™ 7000 / 9000 Series Processors<br>Up to 16C/32T                                                                                                                      |
| GPU                      | Max GPU Count: Up to 1 double-width or 2 single-width GPUs<br>Supported GPU: NVIDIA PCIe: L4, RTX A2000<br>CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect                                                          |
| System Memory            | Slot Count: 4 DIMM slots<br>Max Memory (2DPC): Up to 192GB 5200MT/s ECC/non-ECC DDR5 UDIMM                                                                                                                                     |
| Drive Bays Configuration | Default: Total 8 bays<br>• 8 front hot-swap 3.5" SAS/SATA drive bays<br>M.2: 2 M.2 PCIe 5.0 x4 NVMe slots (M-key 2280/22110)                                                                                                   |
| Expansion Slots          | Default<br>• 1 PCIe 4.0 x4 LP slot<br>• 2 PCIe 5.0 x16 LP slots                                                                                                                                                                |
| On-Board Devices         | SATA: SATA (6Gbps) ; RAID 0/1 support<br>NVMe: NVMe; RAID 0/1 support(Native)<br>Network Connectivity: 1 RJ45 1GbE with Realtek RTL8211F PHY (dedicated IPMI)<br>2 RJ45 1GbE with Intel® I210-AT                               |
| Input / Output           | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port<br>USB: 3 Type-A ports(Rear)<br>2 Type-C ports(Rear)<br>1 Type-C port(Rear)<br>Video: 1 VGA port<br>1 DisplayPort 1.4 port<br>1 HDMI 2 port<br>Audio: Rear Audio<br>TPM: 1 TPM header |

(Front View – System)



| Drive Bay | Description                         |
|-----------|-------------------------------------|
| 4 ~ 7     | 8 Hot-swap 3.5" SAS/SATA Drive Bays |

(Rear View – System)

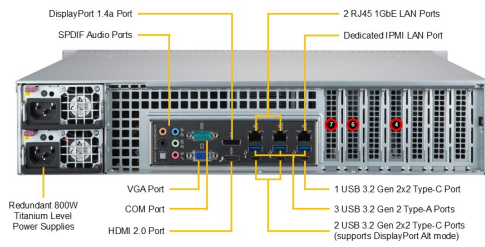

| Slot | Slot Description |
|------|------------------|
| 1    | PCIe 4.0 x4      |
| 2    | PCIe 5.0 x16     |

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Cooling        | Fans: Up to 3x 80mm Fan(s)<br>Air Shroud: 1 Air Shroud                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Power Supply          | 2x 800W Redundant (1 + 1) Titanium Level (96%) power supplies                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| System BIOS           | BIOS Type: AMI 32MB SPI Flash                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Management            | SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!                                                                                                                                                                                                                                                                                                                     |
| PC Health Monitoring  | FAN: Status monitor for speed control<br>Other Features:<br>8-pin 12v DC power connector, ACPI power management, ATX Power connector, Chassis intrusion header, Control of power-on for recovery from AC power loss, CPU thermal trip support for processor<br>Temperature: CPU thermal trip support, Monitoring for CPU and chassis environment, PECI<br>Voltage:<br>+1.0V PCH, +1.8V PCH, +12V, +3.3V, +5V, +5V standby, 1.05 (PCH), 3.3V standby, 5 (4-pin), CPU, CPU temperature, CPU thermal trip support, PCH temperature, System temperature, VBAT, VRM |
| Dimensions and Weight | Weight: Gross Weight: 52 lbs (23.59 kg)<br>Net Weight: 37 lbs (16.78 kg)<br>Available Color: Black                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Operating Environment | Operating Temperature: 10°C to 35°C (50°F to 95°F)<br>Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)<br>Operating Relative Humidity: 8% to 90% (non-condensing)<br>Non-operating Relative Humidity: 5% to 95% (non-condensing)                                                                                                                                                                                                                                                                                                                      |
| Motherboard           | <a href="#">Super H13SAE-MF</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Chassis               | <a href="#">CSE-825TQC-R802LPB</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |