

# GPU SuperServer ARS-122L-NR

1U air-cooled system with dual NVIDIA Vera CPUs



## Key Applications

High Performance Computing, AI/Deep Learning Training, Large Language Model (LLM) Natural Language Processing, General purpose CPU workloads, including analytics, data science, simulation, HPC, application servers, and more,


## Key Features

- 1U 1Node Air-cooled system with Dual NVIDIA VERA CPU, 450W TDP per processor with air cooling;
- Up to 1.5TB LPDDR5X SOCAMM2 per CPU;
- Up to 4 PCIe 6.0 x16 FHFL NIC slots (max of 2x BF-3 DPU);
- Up to 8x PCIe 6.0 E1.S drive bays  
2 PCIe 6.0 x4 NVMe M.2 slots;
- 2 redundant (1+1) 2700W Titanium level efficiency power supplies;



|                          |                                                                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Form Factor              | 1U Rackmount<br>Enclosure: 438.4 x 43.6 x 900mm (17.26" x 1.7" x 35.4")<br>Package: 695 x 230 x 1170mm (27.36" x 9.05" x 46.06")                                            |
| Processor                | Dual processor(s)<br>NVIDIA Vera CPU C2 (88-core)                                                                                                                           |
| System Memory            | Onboard Memory<br>Up to 3TB ECC LPDDR5X                                                                                                                                     |
| Drive Bays Configuration | Default: Total 8 bays <ul style="list-style-type: none"> <li>• 8 front fixed E1.S PCIe 5.0 x8 NVMe drive bays</li> </ul> M.2: 2 M.2 PCIe 5.0 x4 NVMe slots (M-key; USB 3.0) |
| Expansion Slots          | PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> <li>• 4 PCIe 6.0 x16 (in x16) FHFL slots</li> </ul> M.2: 2 M.2 PCIe 5.0 x8 NVMe slots (M-key)  |
| On-Board Devices         | Chipset: NVIDIA C2<br>IPMI: Support for Intelligent Platform Management Interface v.2.0<br>IPMI 2.0 with virtual media over LAN and KVM-over-LAN support                    |
| Input / Output           | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port<br>1 RJ45 1 GbE LAN port<br>USB: 1 USB 3.0 Type-A port(Rear)<br>Video: 1 mini-DP port<br>TPM: 1 TPM Onboard/port 80                |

(Front View – System)

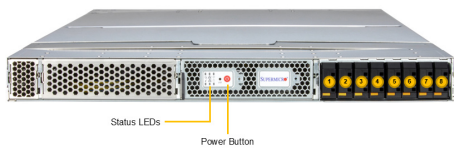

| Drive Bay                                                                         | Description      |
|-----------------------------------------------------------------------------------|------------------|
|  | 8 E1S Drive Bays |

|                       |                                                                                                                                                                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Cooling        | Fans: Up to 9 heavy duty fans with optimal fan speed control                                                                                                                                                                                                                     |
| Power Supply          | 2x 2700W Redundant Titanium Level (96%) power supplies                                                                                                                                                                                                                           |
| System BIOS           | BIOS Type: AMI 64MB SPI Flash EEPROM                                                                                                                                                                                                                                             |
| Management            | Redfish API; Supermicro Update Manager (SUM); KVM with dedicated LAN ; IPMI 2.0; Watch Dog; OOB Management Package (SFT-OOB-LIC )                                                                                                                                                |
| PC Health Monitoring  | CPU: Monitors for CPU Cores, Chipset Voltages, Memory<br>FAN: Fans with tachometer monitoring<br>Pulse Width Modulated (PWM) fan connectors<br>Status monitor for speed control<br>Temperature: Monitoring for CPU and chassis environment<br>Thermal Control for fan connectors |
| Dimensions and Weight | Weight: Gross Weight: 49.21 lbs (22.32 kg)<br>Net Weight: 33.64 lbs (15.26 kg)<br>Available Color: Silver                                                                                                                                                                        |
| Operating Environment | Operating Temperature: 10°C to 35°C (50°F to 95°F)<br>Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)<br>Operating Relative Humidity: 8% to 90% (non-condensing)<br>Non-operating Relative Humidity: 5% to 95% (non-condensing)                                        |
| Motherboard           | <a href="#">Super G3DBV</a>                                                                                                                                                                                                                                                      |
| Chassis               | CSE-MG107TS-R000NDFP                                                                                                                                                                                                                                                             |