

# Storage SuperServer SSG-542B-DE1CR90

4U 2-node top-loading storage server with 90 hot-swap 3.5" SAS/SATA bays and PCIe 5.0



## Key Applications



Big Data & Analytics, Data Lake, HPC and AI/ML Workloads, Telco & Cloud Service Providers, Financial Services & Healthcare Image Archives, Content Repositories, Government Data Protection,

## Key Features

- Two **hot-pluggable** systems (nodes) in a 4U form factor. Each node supports the following;;
- Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores, Single Socket LGA-4710 (Socket E2) supported, CPU TDP supports Up to 350W TDP;
- Up to 16 DIMMs supporting up to 2TB DDR5-6400 in 1DPC or 2TB DDR5-5200 in 2DPC;
- Up to 1 PCIe 5.0 x8 HHHL + 3 PCIe 5.0 x16 HHHL slots;
- Up to 90 top-loading hot-swap 3.5"/2.5" SAS/SATA + 2 internal fixed 2.5" NVMe drive bays;
- 2 Redundant 2600W Titanium Level power supplies;
- 4U Rackmount chassis;



|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Form Factor              | 4U Rackmount<br>Enclosure: 447 x 177 x 1099mm (17.6" x 6.96" x 43.3")                                                                                                                                                                                                                                                                                                                                                                          |
| Processor                | Single Socket E2 (LGA-4710)<br>Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores<br>P-cores: Up to 86C/144T; Up to 108MB Cache<br>E-cores: Up to 144C/144T; Up to 108MB Cache                                                                                                                                                                                                                       |
| System Memory            | Slot Count: 16 DIMM slots<br>Max Memory (1DPC): Up to 2TB 6400MT/s ECC DDR5 RDIMM<br>Max Memory (2DPC): Up to 2TB 5200MT/s ECC DDR5 RDIMM                                                                                                                                                                                                                                                                                                      |
| Drive Bays Configuration | Default: Total 90 bays <ul style="list-style-type: none"> <li>• 90 top-loading hot-swap 3.5"/2.5" SAS/SATA drive bays</li> </ul> Option A: Total 2 bays <ul style="list-style-type: none"> <li>• 2 internal fixed 2.5" PCIe 5.0 x4 NVMe* drive bays</li> </ul> (*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details)<br>M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key 2280/22110) |
| Expansion Slots          | PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> <li>• 1 PCIe 5.0 x8 (in x8) HHHL slot</li> <li>• 3 PCIe 5.0 x16 (in x16) HHHL slots</li> </ul> M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key 2280/22110)                                                                                                                                                                                                               |
| On-Board Devices         | NVMe: NVMe; RAID 0/1 support<br>Network Connectivity: No NIC option supported                                                                                                                                                                                                                                                                                                                                                                  |
| Input / Output           | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port<br>USB: 2 USB 3.0 ports(rear)<br>Video: 1 VGA port                                                                                                                                                                                                                                                                                                                                                    |

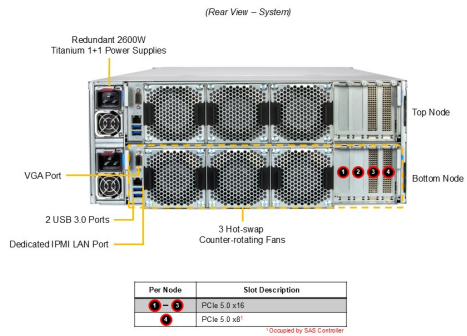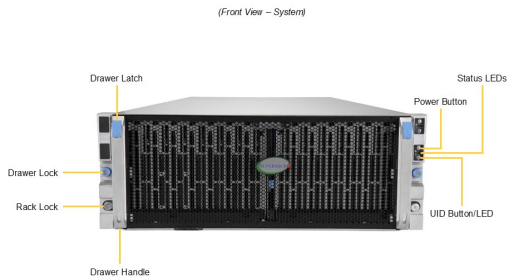

|                       |                                                                                                                                                                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Cooling        | Fans: Up to 1 Counter Rotating 6cm Fan(s)<br>Up to 6 Heavy Duty 8cm Fan(s)                                                                                                                                                                                                       |
| Power Supply          | 2x 2600W Redundant (1 + 1) Titanium Level (96%) power supplies                                                                                                                                                                                                                   |
| System BIOS           | BIOS Type: AMI 64MB SPI Flash                                                                                                                                                                                                                                                    |
| Management            | SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!                                                                                                         |
| PC Health Monitoring  | CPU: Monitors for CPU Cores, Chipset Voltages, Memory<br>FAN: Fans with tachometer monitoring<br>Pulse Width Modulated (PWM) fan connectors<br>Status monitor for speed control<br>Temperature: Monitoring for CPU and chassis environment<br>Thermal Control for fan connectors |
| Dimensions and Weight | Weight: Gross Weight: 225 lbs (102.06 kg)<br>Net Weight: 130 lbs (58.97 kg)<br>Available Color: N/A                                                                                                                                                                              |
| Operating Environment | Operating Temperature: 10°C to 35°C (50°F to 95°F)<br>Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)<br>Operating Relative Humidity: 8% to 90% (non-condensing)<br>Non-operating Relative Humidity: 5% to 95% (non-condensing)                                        |
| Motherboard           | <a href="#">Super X14SBSC</a>                                                                                                                                                                                                                                                    |
| Chassis               | CSE-947HTS-R2K63P                                                                                                                                                                                                                                                                |