

# AI Inference / DeviceEdge

## Jetson System AIE-PO23/33-3M AIE-PN33/43-3M



### Features



- Supports NVIDIA Jetson Orin Nano/NX Series
- 1 x M.2 B-Key/E-Key
- 3 x M.2 M-Key (1 x 128GB built-in)
- 2 x RJ-45 GbE Ports
- Wide Power Input Range 12 to 24 VDC
- Supports OOB (out-of-band) powered by Innodisk (optional)
- Operating temperature -25°C ~ +55°C
- Fanless Design



### Specifications

| Model Number           | AIE-PO23-3M / AIE-PO33-3M                                                                                                                 | AIE-PN33-3M / AIE-PN43-3M                                                                                                                 |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Module Compatibility   | NVIDIA Jetson Orin Nano 4/8G                                                                                                              | NVIDIA Jetson Orin NX 8/16GB                                                                                                              |
| AI Performance         | 20/40 TOPS                                                                                                                                | 70/100 TOPS                                                                                                                               |
| GPU                    | 512 Core NVIDIA Ampere, with<br>16 Tensor Cores<br>1024 Core NVIDIA Ampere, with<br>32 Tensor Cores                                       | 1024 Core NVIDIA Ampere, with<br>32 Tensor Cores                                                                                          |
| CPU                    | 6-core Arm® Cortex®-A78AE v8.2 64-bit<br>1.5MB L2 + 4MB L3                                                                                | 6-core Arm® Cortex®-A78AE v8.2 64-bit<br>1.5MB L2 + 4MB L3<br>8-core Arm® Cortex®-A78AE v8.2 64-bit<br>2MB L2 + 4MB L3                    |
| Memory                 | 4GB 64-bit LPDDR5 34 GB/s<br>8GB 128-bit LPDDR5 68 GB/s                                                                                   | 8GB 128-bit LPDDR5 102.4 GB/s<br>16GB 128-bit LPDDR5 102.4 GB/s                                                                           |
| Storage                | 1 x M.2 NVMe M-Key 2242 (128GB built-in)                                                                                                  |                                                                                                                                           |
| Display                | 1 x HDMI 2.0 Type A                                                                                                                       |                                                                                                                                           |
| LAN                    | 2 x RJ-45 GbE Ports                                                                                                                       |                                                                                                                                           |
| USB                    | 2 x USB 3.2 Gen2 Type A (support up to 10 Gbps shared)<br>1 x OTG Type-C                                                                  |                                                                                                                                           |
| I/O Interfaces         | 5 x GPIO, 1 x UART, 1 x I²C, 1 x RS-232, 1 x RS-422/485, 1 x CAN (isolation; support CAN FD)                                              |                                                                                                                                           |
| Expansion              | 1 x M.2 B-Key 3042/3052 (LTE/5G)<br>1 x M.2 E-Key 2230 (Wifi/BT)<br>1 x M.2 M-Key 2242 (NVMe 128GB built-in)<br>2 x M.2 M-Key 2280 (PCIe) | 1 x M.2 B-Key 3042/3052 (LTE/5G)<br>1 x M.2 E-Key 2230 (Wifi/BT)<br>1 x M.2 M-Key 2242 (NVMe 128GB built-in)<br>2 x M.2 M-Key 2280 (PCIe) |
| MISC. Function         | 1 x Power Button, 1 x Recovery Button, 1 x Reset Button                                                                                   |                                                                                                                                           |
| Power Input /Connector | DC-in 12-24VDC / 4-Pin DC Jack Power Connector                                                                                            |                                                                                                                                           |
| Power consumption      | Idle: 6.413 W<br>Full Loading: 43.13* W                                                                                                   | Idle: 6.413 W<br>Full Loading: 43.13* W                                                                                                   |
|                        | *For more test condition information, please refer to user manual                                                                         |                                                                                                                                           |
| Dimension (W x D x H)  | 270 x 195 x 80 mm (10.63 x 7.67 x 3.15 in)                                                                                                |                                                                                                                                           |
| Mounting               | Wall Mount (optional) / Din Rail (optional)                                                                                               |                                                                                                                                           |
| Net Weight             | TBC kg (TBC lb)                                                                                                                           |                                                                                                                                           |
| Vibration              | 1 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis                                                                                     |                                                                                                                                           |
| Shock                  | 10 G, IEC 60068-2-27, half sine, 11 ms duration                                                                                           |                                                                                                                                           |
| Temperature            | Operating Temp.: -25°C ~ +55°C (-13°F ~ +131°F) with 0.5 m/s air flow<br>Storage Temp.: -40°C ~ +85°C (-40°F ~ +185°F)                    |                                                                                                                                           |
| Humidity               | 95% @ 40°C (104°F) (non-condensing)                                                                                                       |                                                                                                                                           |
| Software Support       | Linux (Support Jetpack 5.0 above)                                                                                                         |                                                                                                                                           |
| Certification          | CE / FCC Class A / UKCA                                                                                                                   |                                                                                                                                           |

System & Mounting Dimensions

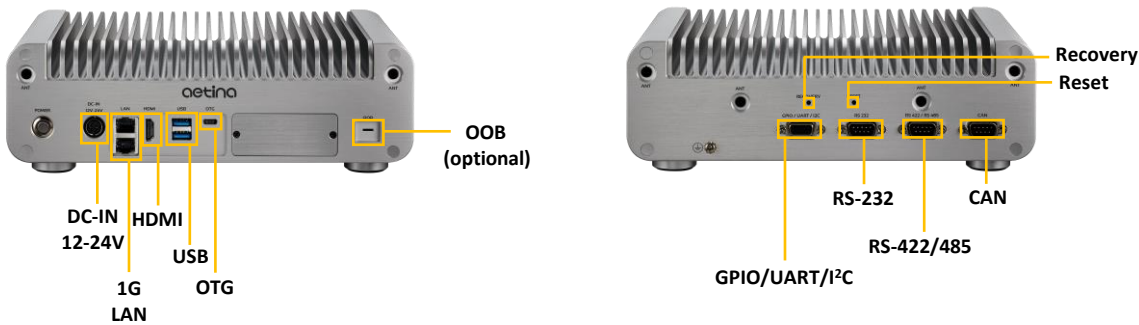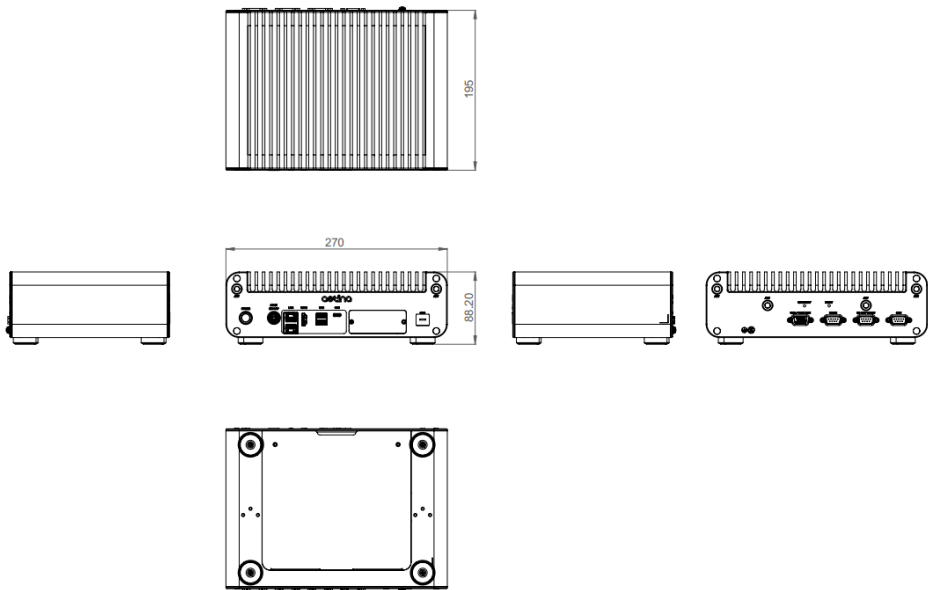

Ordering Information

| Model name       | Description                                                                                            |
|------------------|--------------------------------------------------------------------------------------------------------|
| AIE-PO23-3M-1-A1 | Orin Nano 4GB, 1 x HDMI, 2 x GbE, 2 x USB, 128GB SSD, B/E/M(x3) Key, 12 to 24 VDC input, -25°C ~ +55°C |
| AIE-PO33-3M-1-A1 | Orin Nano 8GB, 1 x HDMI, 2 x GbE, 2 x USB, 128GB SSD, B/E/M(x3) Key, 12 to 24 VDC input, -25°C ~ +55°C |
| AIE-PN33-3M-1-A1 | Orin NX 8GB, 1 x HDMI, 2 x GbE, 2 x USB, 128GB SSD, B/E/M(x3) Key, 12 to 24 VDC input, -25°C ~ +55°C   |
| AIE-PN43-3M-1-A1 | Orin NX 16GB, 1 x HDMI, 2 x GbE, 2 x USB, 128GB SSD, B/E/M(x3) Key, 12 to 24 VDC input, -25°C ~ +55°C  |

Packing List

| Item/Part Number | Description                         |
|------------------|-------------------------------------|
| AIE-PO23-3M-1-A1 | AIE-PO23-3M system w/ Orin Nano 4GB |
| AIE-PO33-3M-1-A1 | AIE-PO32-3M system w/ Orin Nano 8GB |
| AIE-PN33-3M-1-A1 | AIE-PN32-3M system w/ Orin NX 8GB   |
| AIE-PN43-3M-1-A1 | AIE-PN42-3M system w/ Orin NX 16GB  |
| 53-0F0000-0003   | 100-240V 60W 12V 5A power adaptor   |

Accessories (Optional)

| Part Number    | Description    |
|----------------|----------------|
| 32-010000-0005 | US power cord  |
| 32-010000-0006 | EU power cord  |
| 32-010000-0008 | JP power cord  |
| 3102000037N000 | UK power cord  |
| 55-BEPX11-Z000 | Wall Mount Kit |
| 55-AEPX11-Z000 | Din Rail Kit   |

Peripheral (Optional)

[Download the List](#)

