



Graid Technology Inc.

SupremeRAID™ Card Specification

PRESENTED BY:
M.K. Sales Director

GRAIDTECH.COM

- **SupremeRAID™ Product Introduction**
- **Specification sheet of Products**
- **Undeniable Value**
- **Join the future of Enterprise Data protection**

SupremeRAID™ Product Introduction



SR-1010 (2022/5/1)

- **Specifications**
 - Form Factor: 2.713" (H) x 6.137" (L) double slot
 - Maximum Power Draw: 70W
 - Host Interface: PCIe Gen4x16
- **SKUs**
 - SR-BUN-1010-FD32
 - Full Features with 32 NVMe Drives Support

Premium



SR-1000

- **Specifications**
 - Form Factor: 2.713" (H) x 6.137" (L) single slot
 - Maximum Power Draw: 50W
 - Host Interface: PCIe Gen3x16
- **SKUs**
 - SR-BUN-1000-FD12
 - Full Features with 12 NVMe Drives Support
 - SR-BUN-1000-FD32
 - Full Features with 32 NVMe Drives Support

Gold



SR-1001 (2022/ 7/1)

- **Specifications**
 - Form Factor: 2.713" (H) x 6.137" (L) single slot
 - Maximum Power Draw: 30W
 - Host Interface: PCIe Gen3x16
- **SKUs**
 - SR-BUN-1001-FD04
 - Full Features with 4 NVMe Drives Support
 - SR-BUN-1001-FD08
 - Full Features with 8 NVMe Drives Support

Silver

SR-BUN-1001-FD04 specification sheet

SupremeRAID™ by Graid Technology

- **Full License Features** support **RAID 0, 1, 5, 6, 10, NVMe-oF**
- Up to 4 NVMe native Drive.
- Tri mode supported Up to 32 SAS/SATA/NVMe Physical devices.
- Nvidia AI DPU card.
- PCIe x 16 (Gen 3 x 16 bus)
- 2.713“ (H) x 6.137” (L) single slot.
- TDP is 30W.



SR-BUN-1001-FD08 specification sheet

SupremeRAID™ by Graid Technology

- **Full License Features** support **RAID 0, 1, 5, 6, 10, NVMe-oF**
- Up to 8 NVMe native Drive.
- Tri mode supported Up to 32 SAS/SATA/NVMe Physical devices which will rely on Hardware Used.
- Nvidia AI DPU card.
- PCIe x 16 (Gen 3 x 16 bus)
- 2.713“ (H) x 6.137” (L) single slot.
- TDP is 30W.



SR-BUN-1000-FD12 specification sheet

SupremeRAID™ by Graid Technology

- **Full License** Features support RAID 0, 1, 5, 6, 10, NVMe-oF
- Up to 12 NVMe native Drive.
- Tri mode supported Up to 32 SAS/SATA/NVMe Physical devices which will rely on Hardware Used.
- Nvidia AI DPU card.
- PCIe x 16 (Gen 3 x 16 bus)
- 2.713“ (H) x 6.137” (L) single slot.
- TDP is 50W.



SR-BUN-1000-FD32 specification sheet

SupremeRAID™ by Graid Technology

- **Full License Features** support **RAID 0, 1, 5, 6, 10, NVMe-oF**
- Up to 32 NVMe native Drive.
- Tri mode supported Up to 32 SAS/SATA/NVMe Physical devices which will rely on Hardware Used.
- Nvidia AI DPU card.
- PCIe x 16 (Gen 3 x 16 bus)
- 2.713“ (H) x 6.137” (L) single slot.
- TDP is 50W.



SR-BUN-1010-FD32 specification sheet



SupremeRAID™ by Graid Technology

- **Full License Features** support **RAID 0, 1, 5, 6, 10, NVMe-oF**
- Up to 32 NVMe native Drive.
- Tri mode supported Up to 32 SAS/SATA/NVMe Physical devices which will rely on Hardware Used.
- Nvidia AI DPU card.
- PCIe x 16 (Gen 4 x 16 bus)
- 2.7 " (H) x 6.6 " (L) · double slot
- TDP is 50W.

High Compatibility

Verified by Top One Tier Companies

Plug and Play, Easy to Use

SERVER



Please check the AVL for more information



DELL Technologies

GIGABYTE™

ALTOS
an Acer Group Company

ASUS®

ASRock®
— Rack —

MITAC
MiTAC Computing



AIC

Lenovo



SSD

SAMSUNG

Western Digital

Micron

SOLIDIGM

PHISON

KIOXIA

OS Support List

Linux Distribution	x86_64
AlmaLinux	8.5-8.10 (kernel 4.18), 9.0-9.5 (Kernel 5.14)
CentOS	7.9 (Kernel 3.10 and 4.18), 8.3, 8.4, 8.5 (Kernel 4.18)
Debian	11.6 (Kernel 5.10), 12 (Kernel 6.1)
openSUSE Leap	15.2-15.3 (Kernel 5.3), 15.4-15.5 (Kernel 5.14)
Oracle Linux	8.7-8.10 (RHCK 4.18 and UEK 5.15), 9.1-9.4 (RHCK 5.14 and UEK 5.15)
RHEL	7.9 (Kernel 3.10 or 4.18), 8.3-8.10 (Kernel 4.18), 9.0-9.5 (Kernel 5.14)
Proxmox VE	8.1 (Kernel 6.5), 8.2 (Kernel 6.8)
Rocky Linux	8.5-8.10 (Kernel 4.18), 9.0-9.5 (Kernel 5.14)
SLES	15 SP2-SP3 (Kernel 5.3), 15 SP4-SP5 (Kernel 5.14)
Ubuntu	20.04.0-20.04.4 (Kernel 5.4 and 5.15), 22.04.0-22.04.2 (Kernel 5.15), 22.04.3-22.04.4 (Kernel 6.2), 24.04 (Kernel 6.8)

Windows Version	Arch
Windows Server 2019	x86_64
Windows Server 2022	x86_64
Windows Server 2025	x86_64
Windows 11	x86_64

RAID Level support Raid 0/1/5/6/10 in Linux & Windows and Raid 50/60 by Linux LVM
Max Drive Raid Groups: Linux: 8 / Windows: 4



All SKU of Hardware and License

High-end Card HW SR-BUN-1010-FD32

SKU	SR-BUN-1010-FD32
SSD quantity / feature	Up to 32 NVMe/SATA (SAS need purchase additional HBA card) Support NVMeoF
Performance (Ver 1.5 driver)	4k random read: 28M IOPS 4k random write: 2M IOPS 1M sequential read: 260 GB/s 1M sequential write: 100 GB/s 4k random read rebuild: 5.5M IOPS 4k random write rebuild: 1.1M IOPS



All SKU of Hardware and License

Mainstream Card HW SR-BUN-1000 series

SKU	SR-BUN-1000-FD32	SR-BUN-1000-FD12
SSD quantity/ feature	Up to 32 NVMe/SATA (SAS need purchase additional HBA card) Support NVMeoF	Up to 12 NVMe and 20 SATA (SAS need purchase additional HBA card) Support NVMeoF
Performance (Ver.1.5 driver)	4k random read: 16M IOPS 4k random write:820K IOPS 1M sequential read: 220 GB/s 1M sequential write: 90 GB/s 4k random read rebuild: 3M IOPS 4k random write rebuild: 600k IOPS	4k random read: 16M IOPS 4k random write:820K IOPS 1M sequential read: 150 GB/s 1M sequential write: 50 GB/s 4k random read rebuild: 3M IOPS 4k random write rebuild: 600k IOPS


Entry Card HW SR-BUN-1001 OEM model

SKU	SR-BUN-1001-FD08	SR-BUN-1001-FD04
SSD quantity/ feature	Up to 8 NVMe and 24 SATA (SAS need purchase additional HBA card) Support NVMeoF	Up to 4 NVMe and 28 SATA (SAS need purchase additional HBA card) Support NVMeoF
Performance (Ver.1.5 driver)	4k random read: 6M IOPS 4k random write: 500k IOPS 1M sequential read: 80 GB/s 1M sequential write: 30 GB/s 4k random read rebuild: 1M IOPS 4k random write rebuild: 350k IOPS	4k random read: 5.7M IOPS 4k random write: 500k IOPS 1M sequential read: 50 GB/s 1M sequential write: 15 GB/s 4k random read rebuild: 1M IOPS 4k random write rebuild: 350k IOPS

SR-HS-VHH-01 Fan-less kit for SR-BUN-1010

SupremeRAID™ by Graid Technology

- Optional for SR-BUN-1010
- **Assembled by SI from double slot to single slot add on card**
- Design for limited space in system integrated.
- **Included VC heatsink x1 , long bracket x 1 and short bracket x 1**
- **MOQ: 2 sets of Kit**
- **2.7 " (H) x 6.6 " (L) ,**

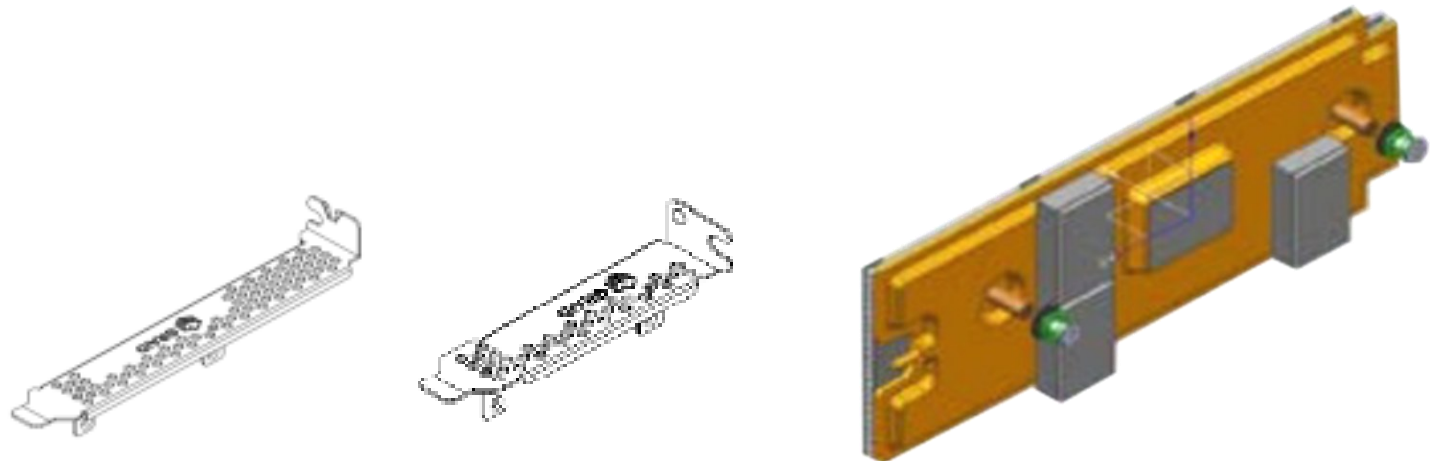

SupremeRAID™

Innovation, Performance, & Value

Flexible & Future Ready



Unmatched flexibility with features like new O/S support, **Write-hole protection with journaling**, **GUI**, **Ec** and **boot drive UEFI** added with software releases

Plug & Play



Out of the box, into the future: effortless installation, no cabling or motherboard re-layout required, **easy for BOM and cost control**

Highly Scalable



Easily manage 32 direct attached NVMe SSDs, **No extra PCIe switch is needed** with Software Composable Infrastructure

World Record Performance



Unprecedented NVMe/NVMeoF performance up to **28M IOPS** and **260GB/s** throughput with a single SupremeRAID™ card delivers the full value of your server investment

Liberate CPU Resources



Offload your entire RAID computation to SupremeRAID™ to free-up precious CPU computing resources for 5G, AI and AIoT applications

Easy to Maintain





SupremeRAID™ doesn't rely on memory caching technology to improve performance, **eliminating the need for battery** backup modules

Join The Future of Enterprise Data Protection

SupremeRAID™ delivers 28 million IOPS and 260 GB/s of throughput on a single card

SupremeRAID™ by Graid Technology not only protects your direct-attached SSDs but also those connected via NVMe over Fabrics, enabling enterprise data centers to achieve record-breaking performance without sacrificing data security or business continuity.

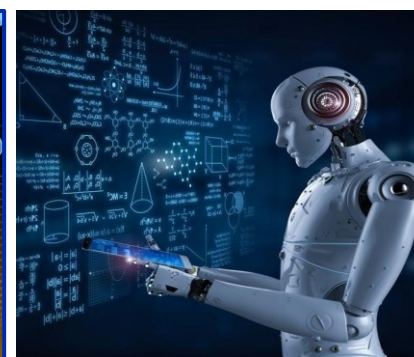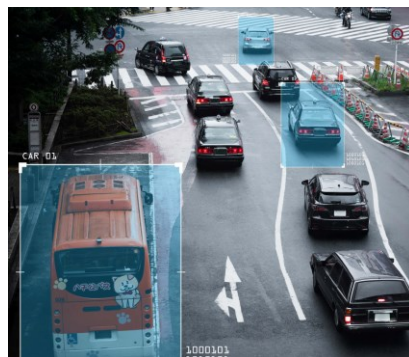



Graid Technology Inc.

Thank You

Contact

MK Uang

Sales Director

+886-917795375

MK.UANG@graidtech.com

GRAIDTECH.COM