


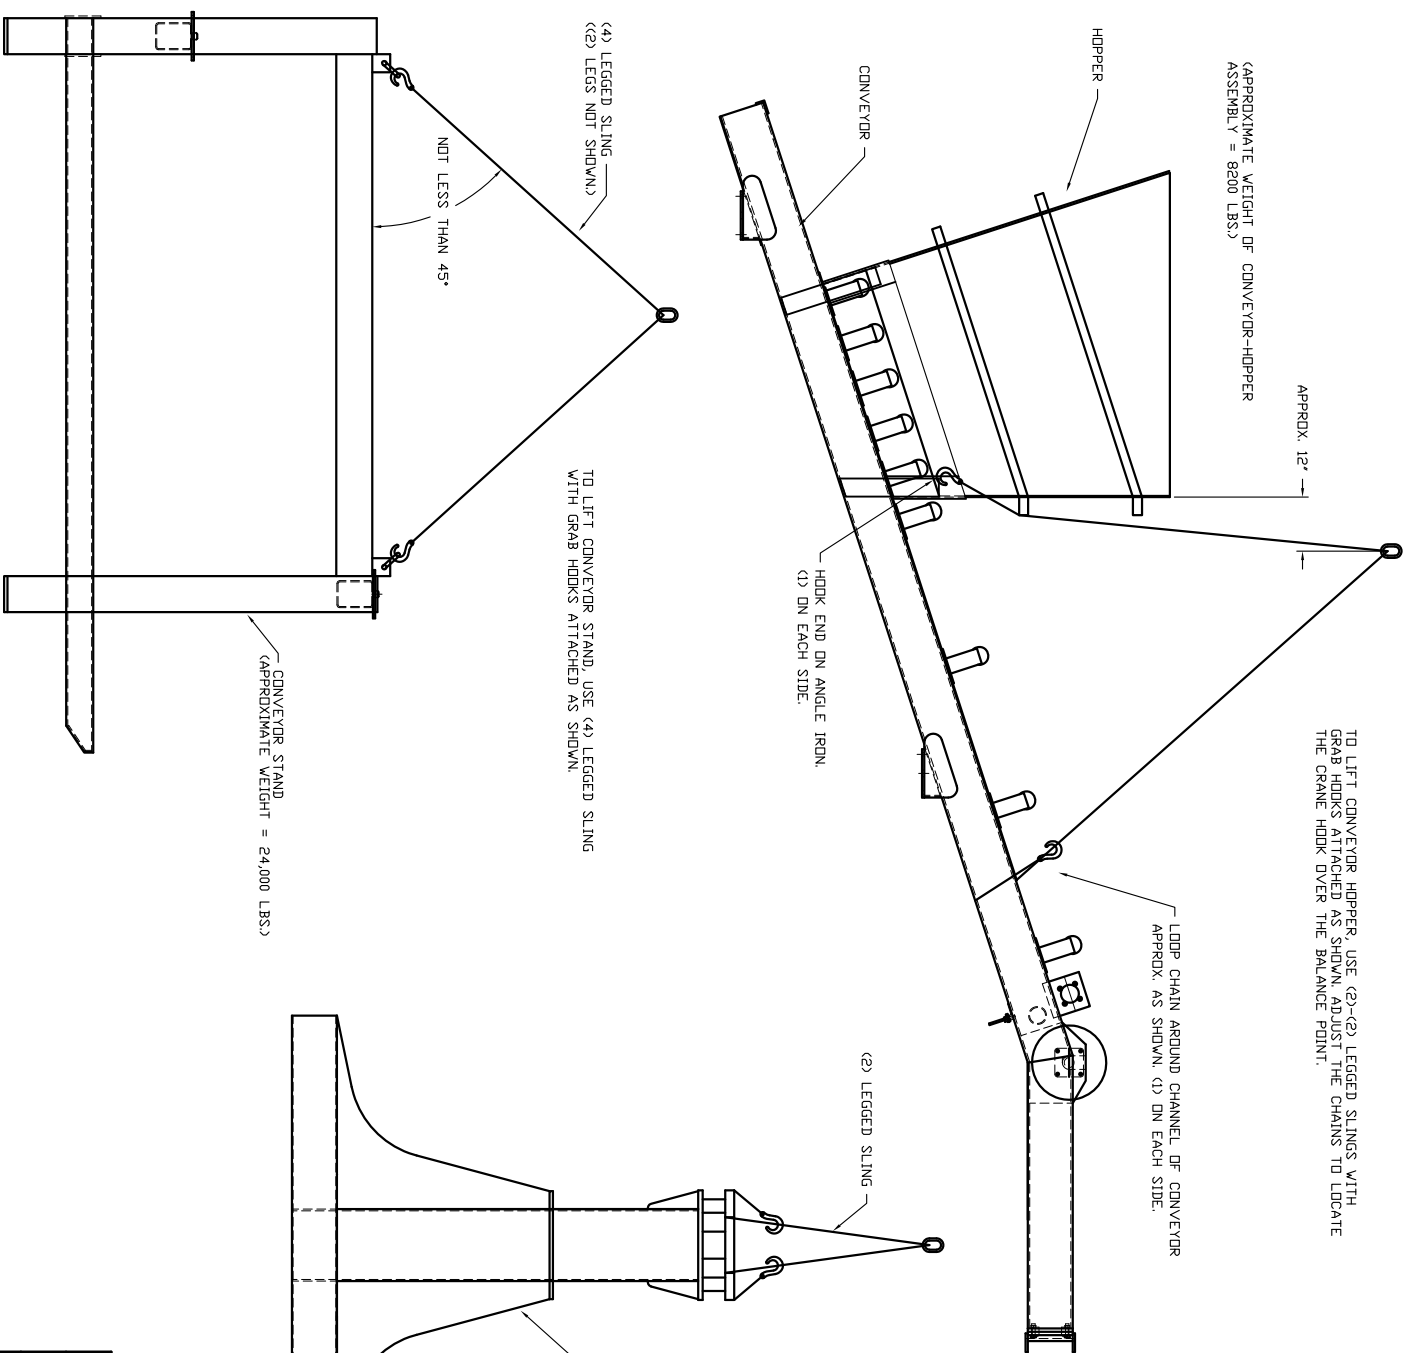

(APPROXIMATE WEIGHT OF CONVEYOR-HOPPER ASSEMBLY = 8200 LBS.)

APPROX. 12"

TO LIFT CONVEYOR-HOPPER, USE (2)-(2) LEGGED SLINGS WITH GRAB HOOKS ATTACHED AS SHOWN, ADJUST THE CHAINS TO LOCATE THE CRANE HOOK OVER THE BALANCE POINT.

LOOP CHAIN AROUND CHANNEL OF CONVEYOR APPROX. AS SHOWN, (1) ON EACH SIDE.

HOOK END ON ANGLE IRON, (1) ON EACH SIDE.

(4) LEGGED SLING (2) LEGS NOT SHOWN

NOT LESS THAN 45°

TO LIFT CONVEYOR STAND, USE (4) LEGGED SLING WITH GRAB HOOKS ATTACHED AS SHOWN.

CONVEYOR STAND (APPROXIMATE WEIGHT = 24,000 LBS.)

TO LIFT PRESSURE-HEAD CAROUSEL, USE A (2) LEGGED SLING WITH GRAB HOOKS, LOOP CHAINS AROUND 1 1/2" FL. APPROX. AS SHOWN.

PRESSURE-HEAD CAROUSEL (APPROXIMATE WEIGHT = 10,000 LBS.)

WARNING: ALL LIFTING EQUIPMENT IS OF ADEQUATE CAPACITY BE SURE OVERHEAD LIFTING, FAILURE TO COMPLY WITH THIS WARNING COULD RESULT IN SERIOUS BODILY INJURY.

HAWKEYE CONCRETE PRODUCTS CO.					
MEDFORD, NJ					
PPIII-HANDING INSTRUCTIONS FOR PIPE-PRO					
MACHINE COMPONENTS					
TOLERANCES (UNLESS SPECIFIED)					
FRACTIONAL	#1/16"	DECIMAL	ANGULAR	FILE NO.	DIR
SCALE	DATE	DRAWN	ENGR	FILE NO.	DRAWING NO.
NTS	5-16-91	BSA		3-4-B-V	25769C
					A