

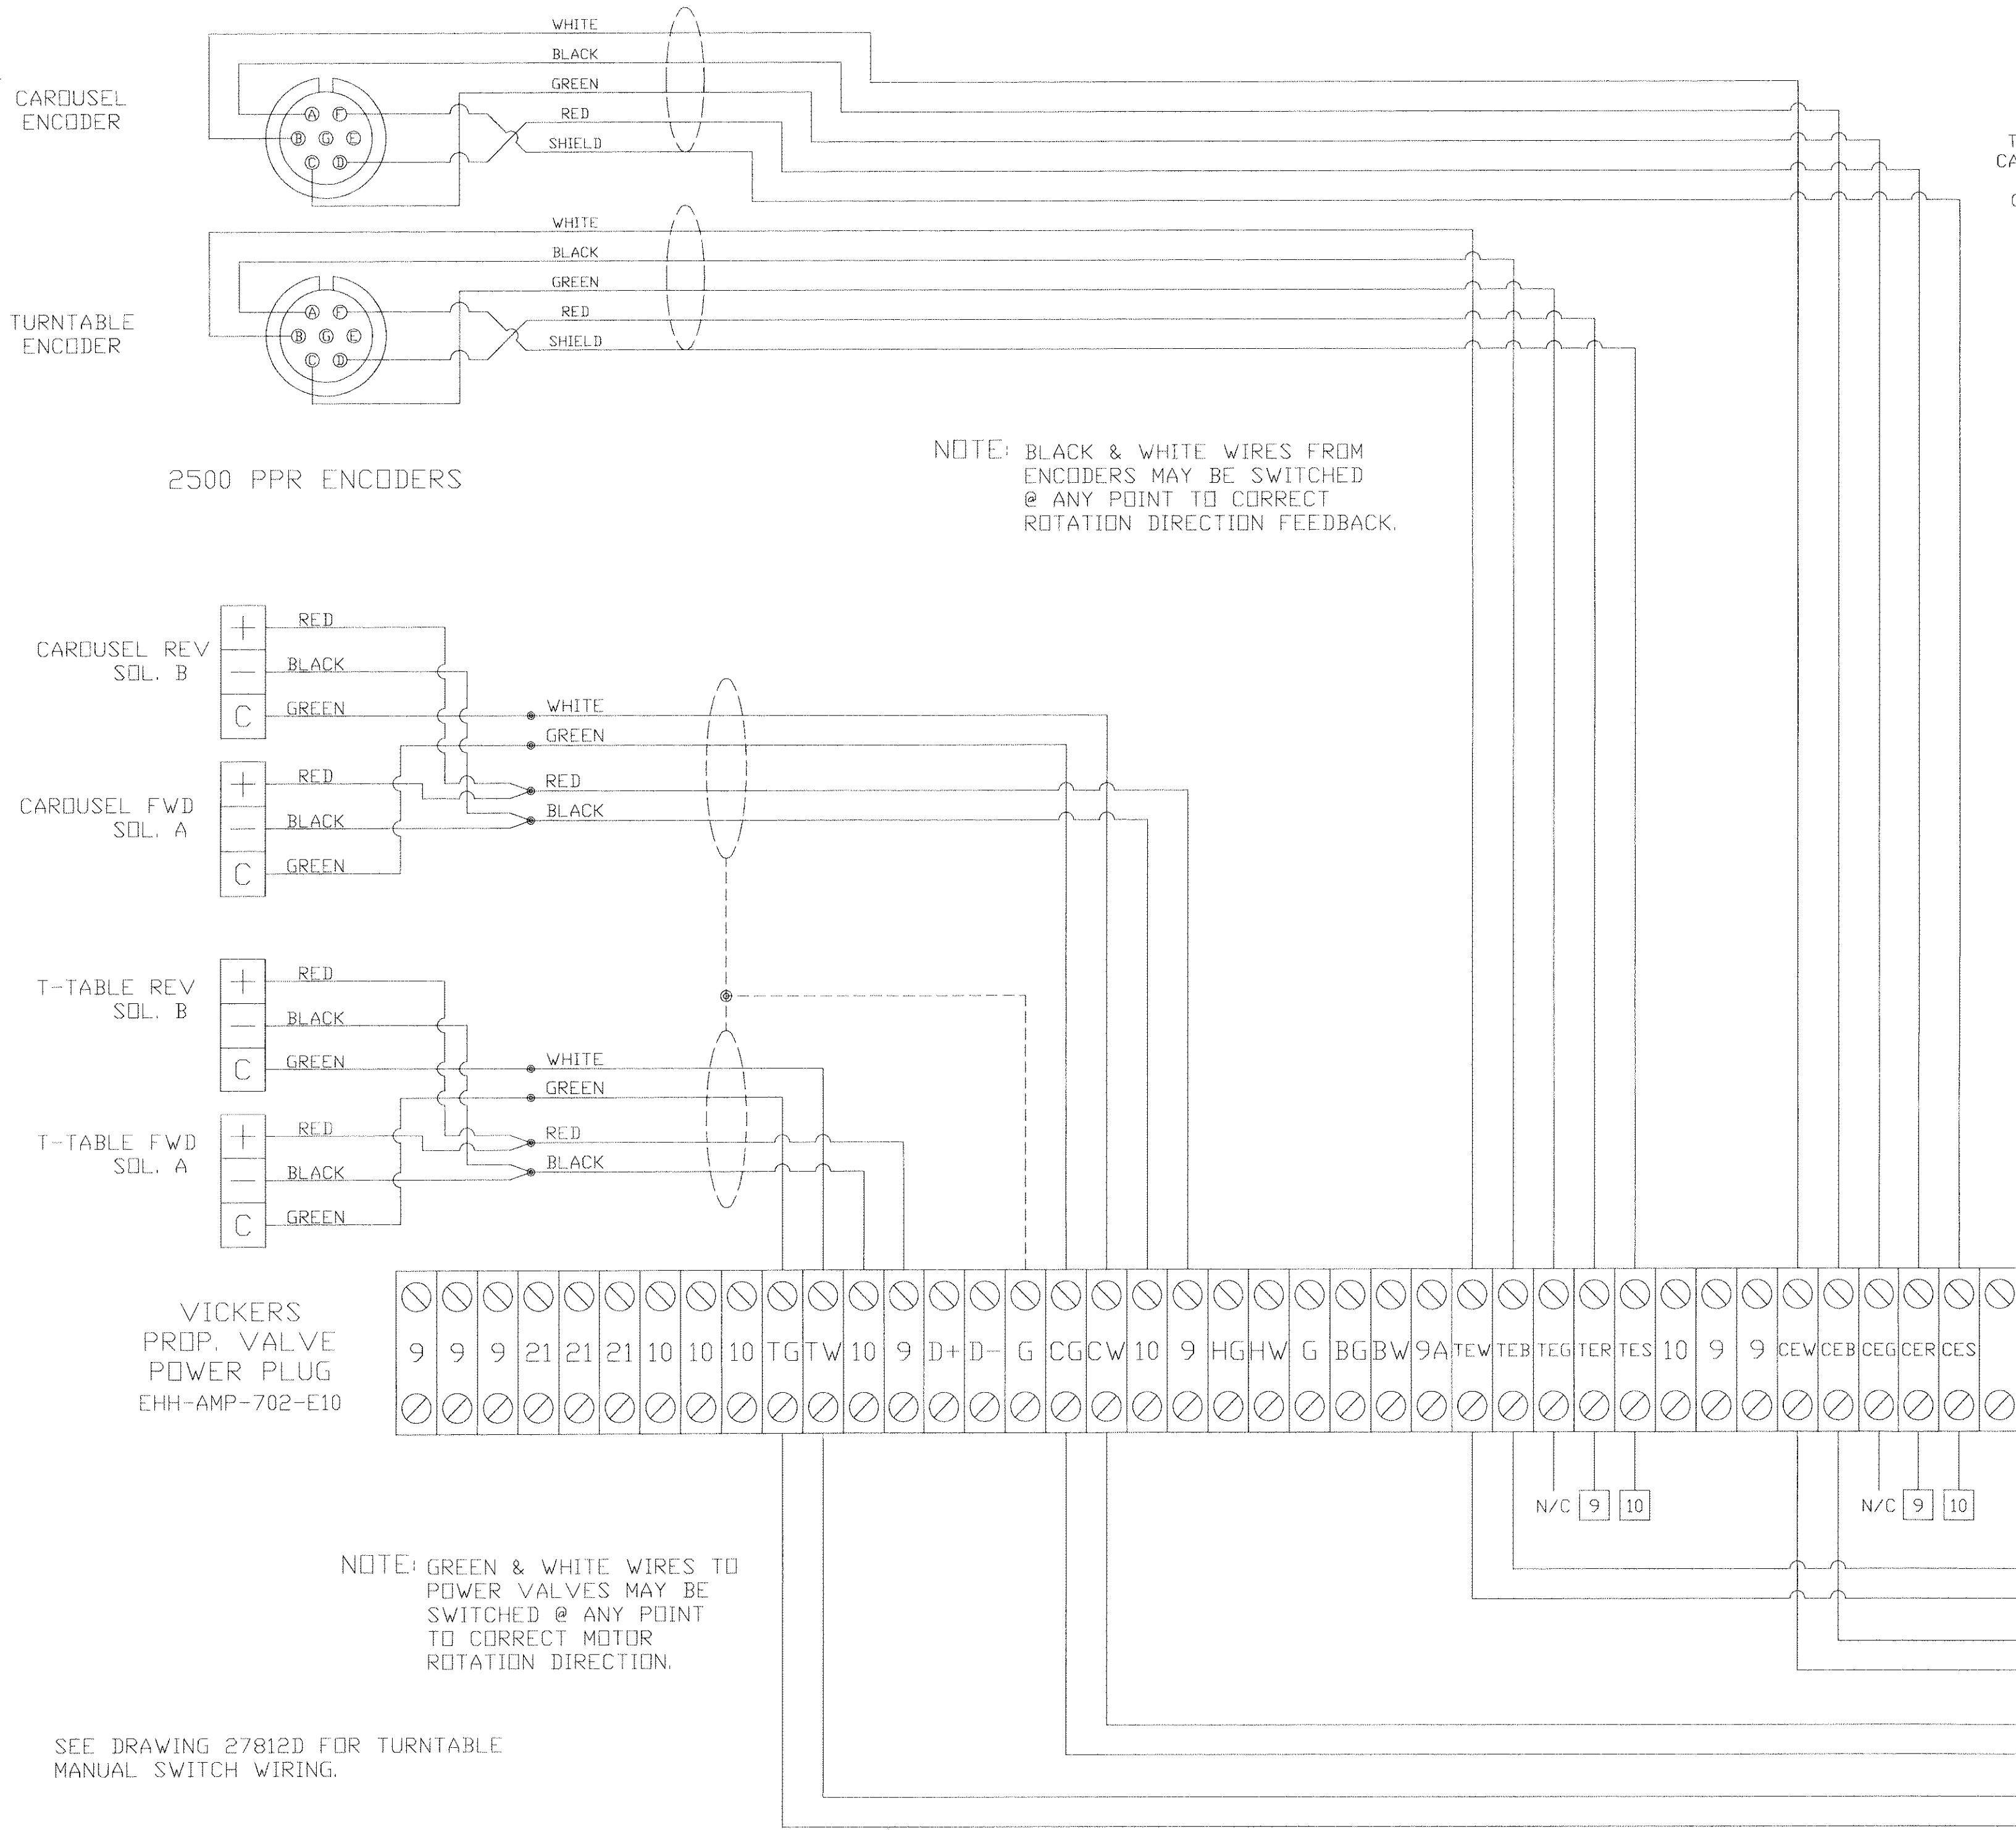


FIELD WIRING

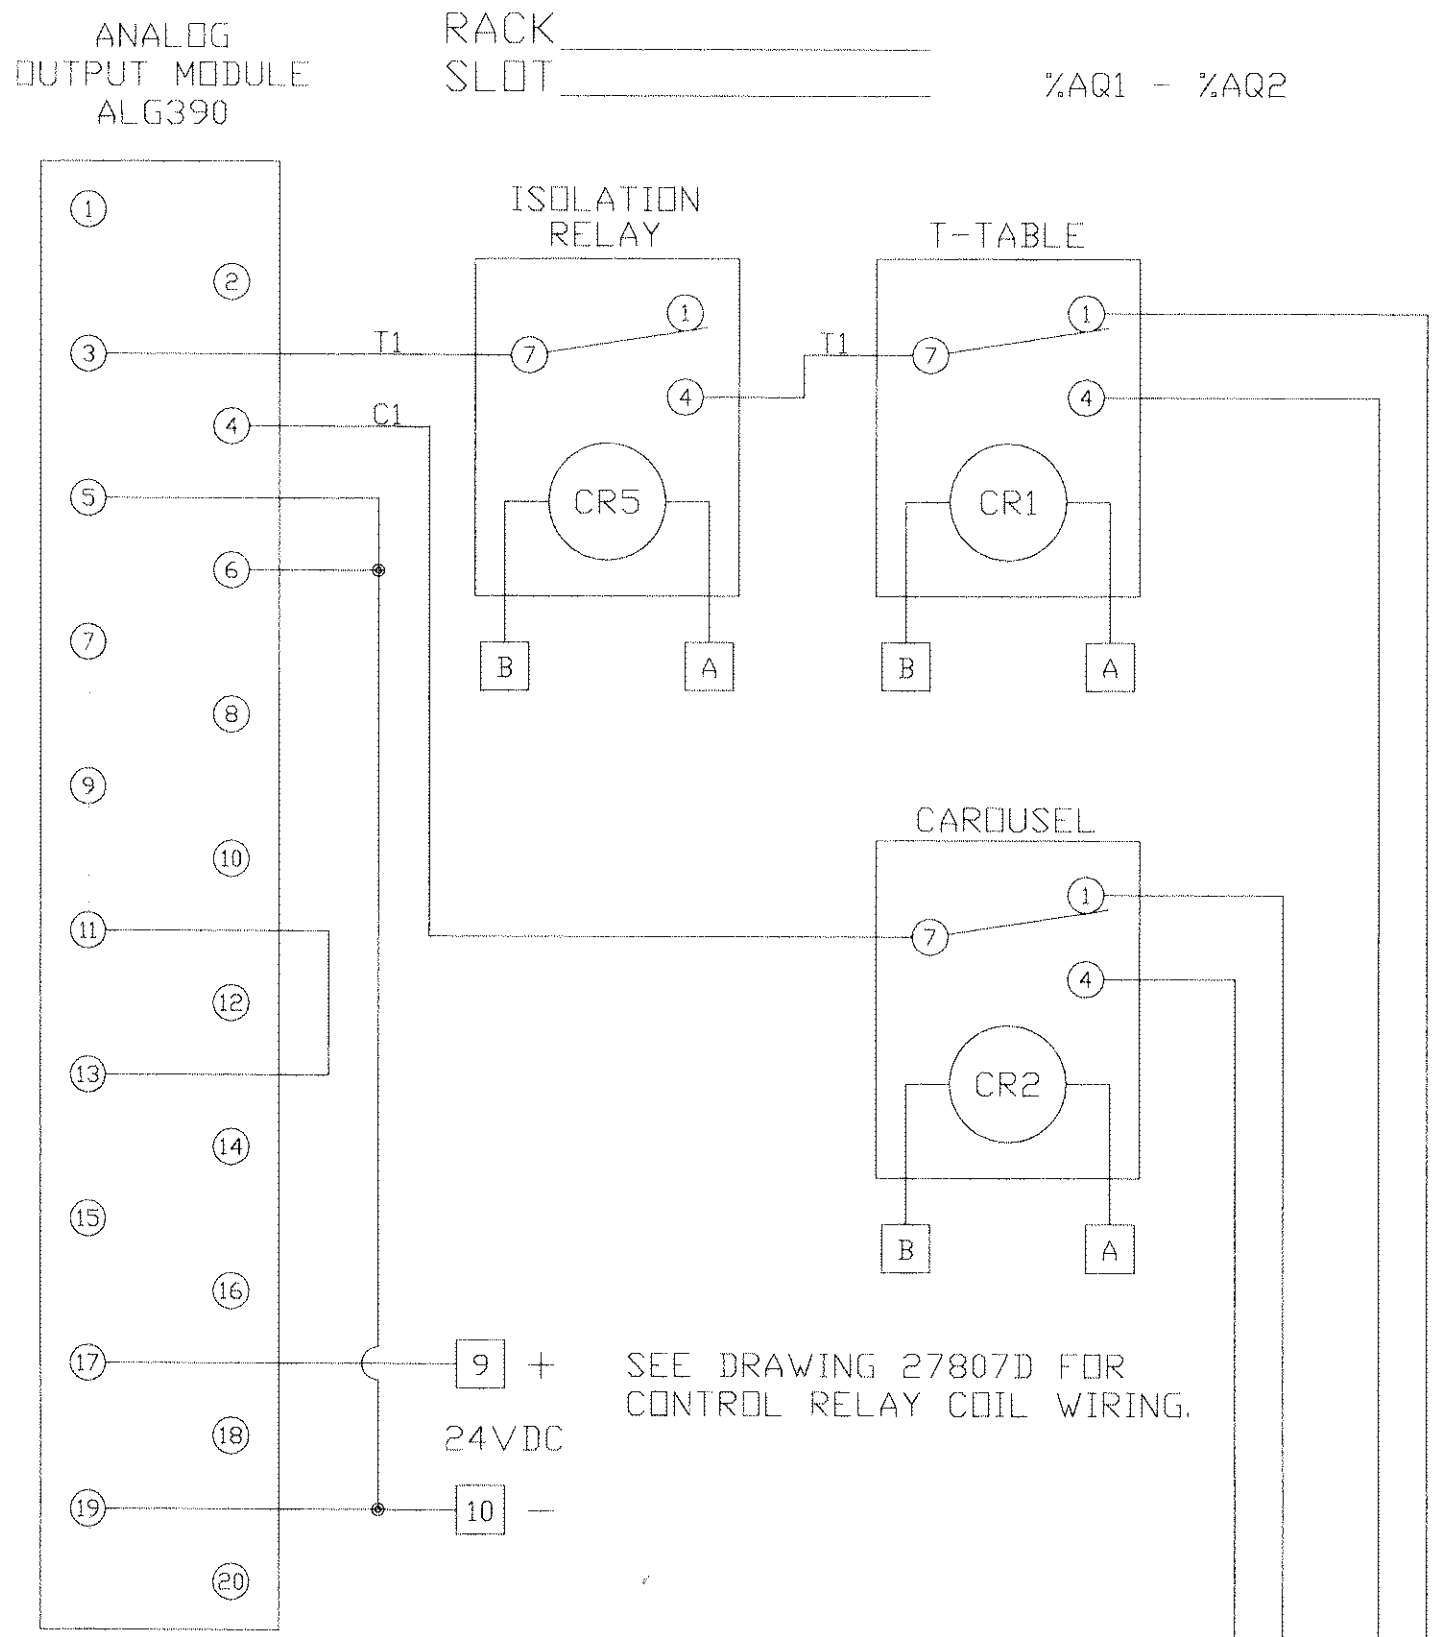

%A11 - %A115
%I129 - %I144
%Q129 - %Q144
T-TABLE POS %A14/5
CAROUSEL POS %A10/11
T-TABLE VEL %A12
CAROUSEL VEL %A13



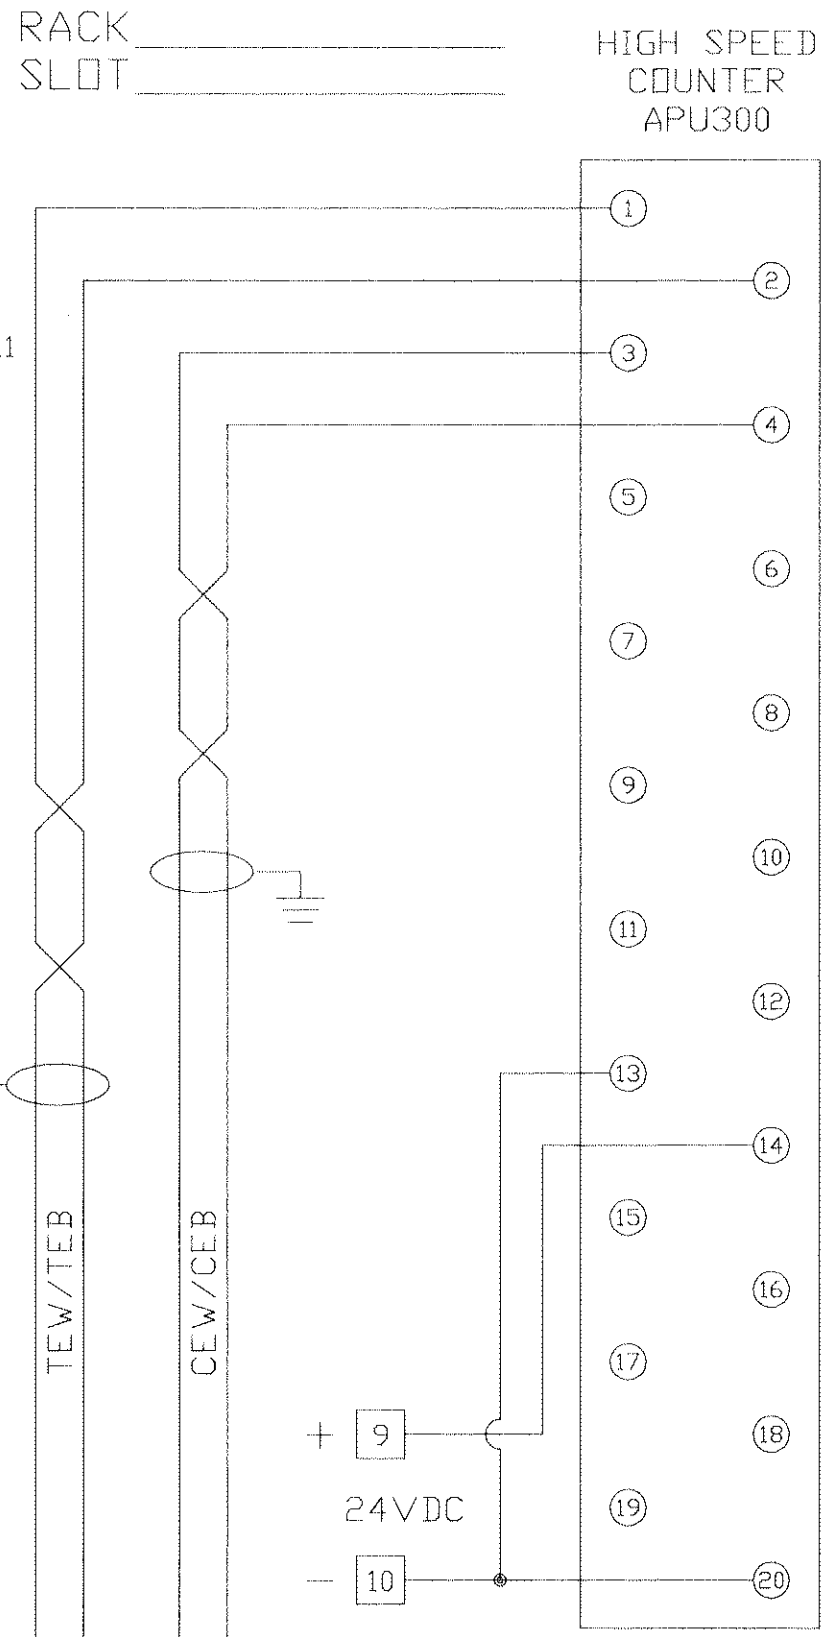


COLOR	WIRE COLOR CODE	FUNCTION	VOLTAGE
WHITE	NEUTRAL		120/220VAC
BROWN	PLC INPUT		120/220VAC, 24VDC
ORANGE	PLC OUTPUT		120/220VAC, 24VDC
BLUE	PLC I/O		5-50VDC
BLACK	1 PHASE		220-600VAC
BLACK	3 PHASE		220-600VAC
GREEN	GROUND		GROUND
RED	1 PHASE		120VAC
YELLOW	PANEL TO PANEL	(EXTERNALLY POWERED)	120/220VAC, 24VDC

HAWKEYE CONCRETE PRODUCTS CO. MEDIAPOLIS, IDWA									
PIPE PRO III T-TABLE AND P-HEAD CAROUSEL ENCODER AND PROPORTIONAL VALVE WIRING DIAGRAM									
TOLERANCES (UNLESS SPECIFIED)									
FRACTIONAL #1/16" DECIMAL					ANGULAR				
DISC					DRAWING NO. ISSUE				
SCALE	DATE	DRAWN	APPR. BY	FILE NO.					
N.T.S.	5/4/93	DEM		26-3					
27811D					B				

INPUT DEVICE VOLTAGE _____

OUTPUT DEVICE VOLTAGE _____

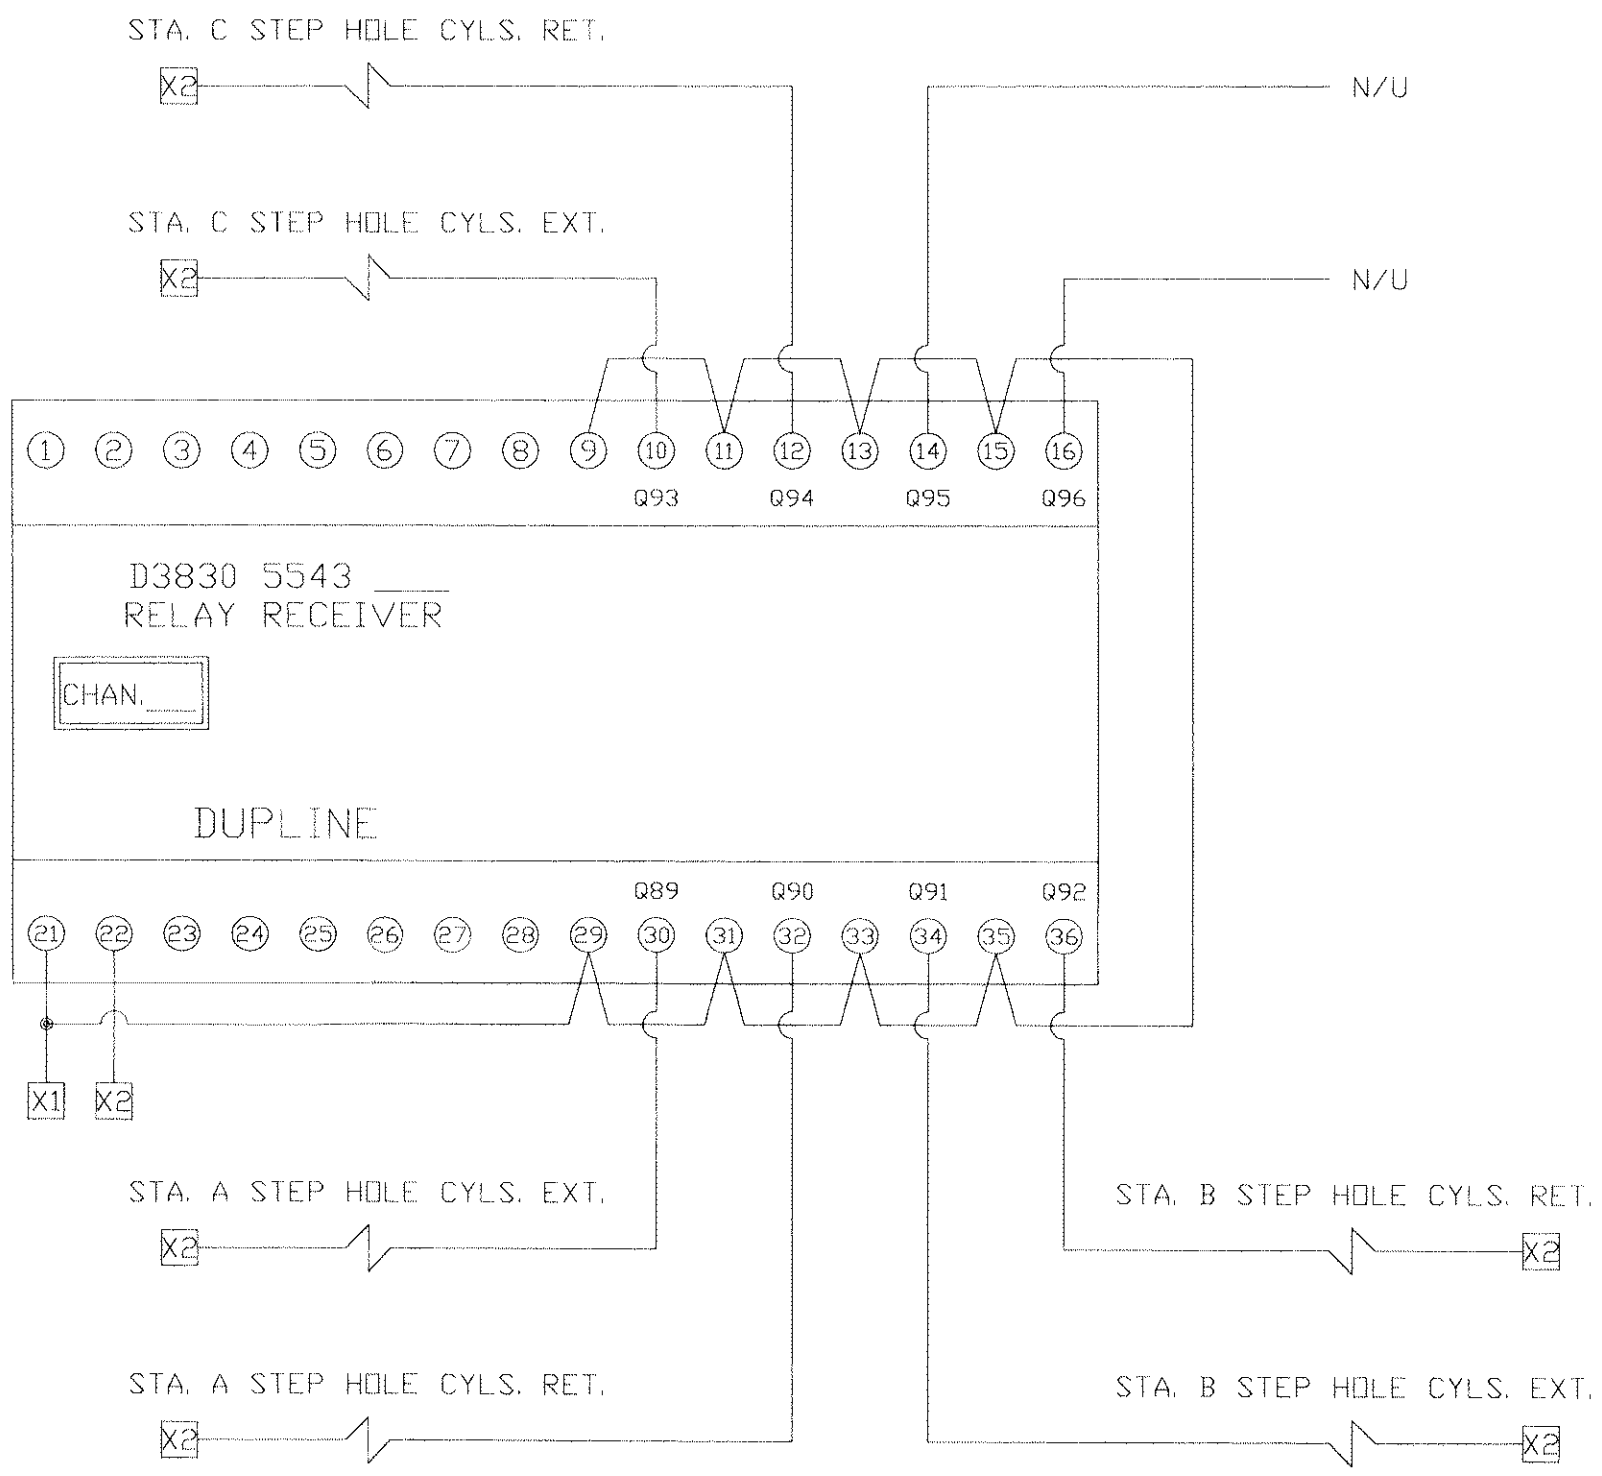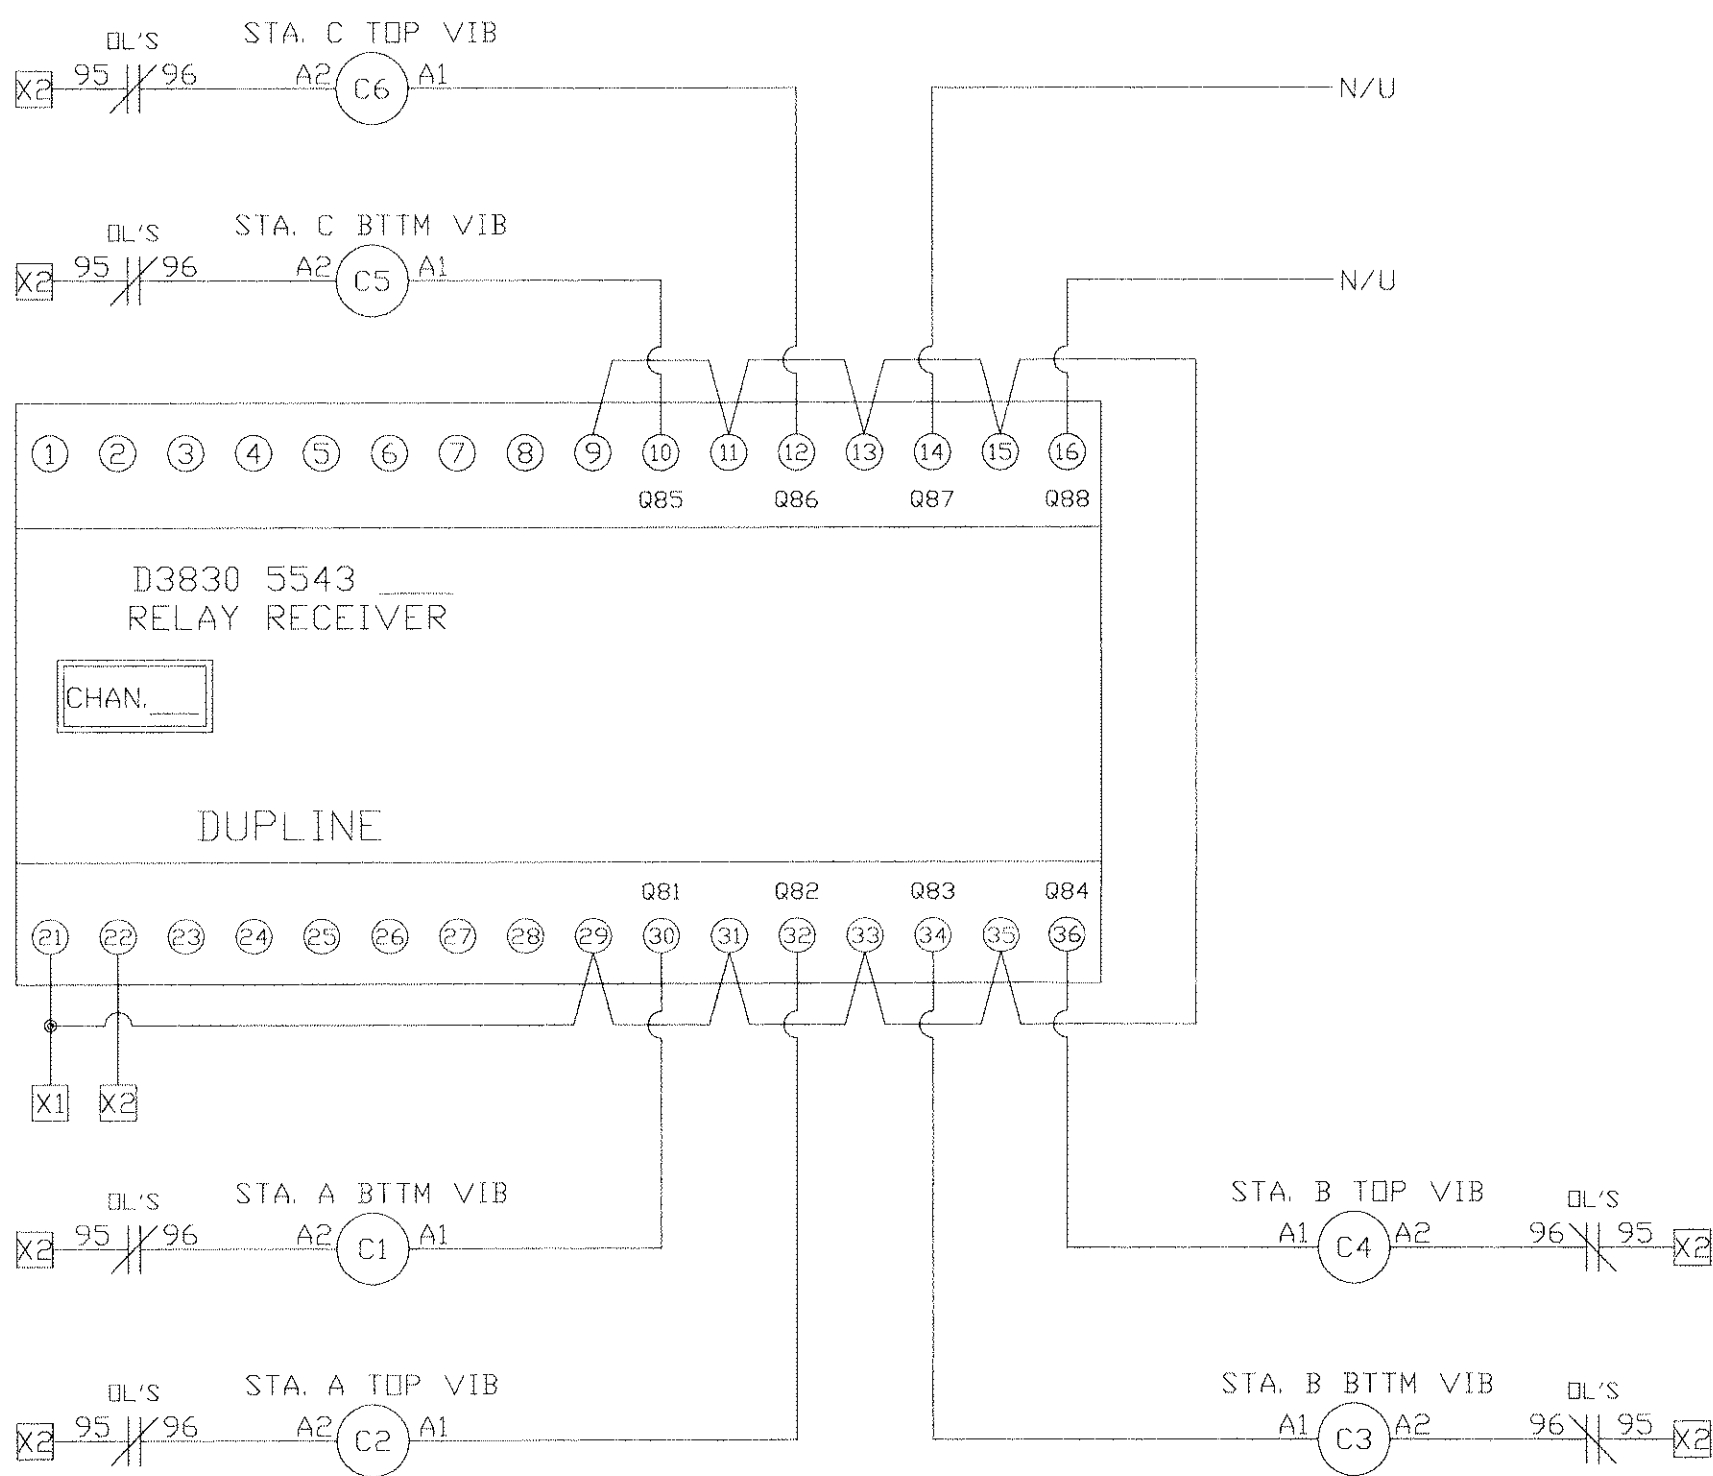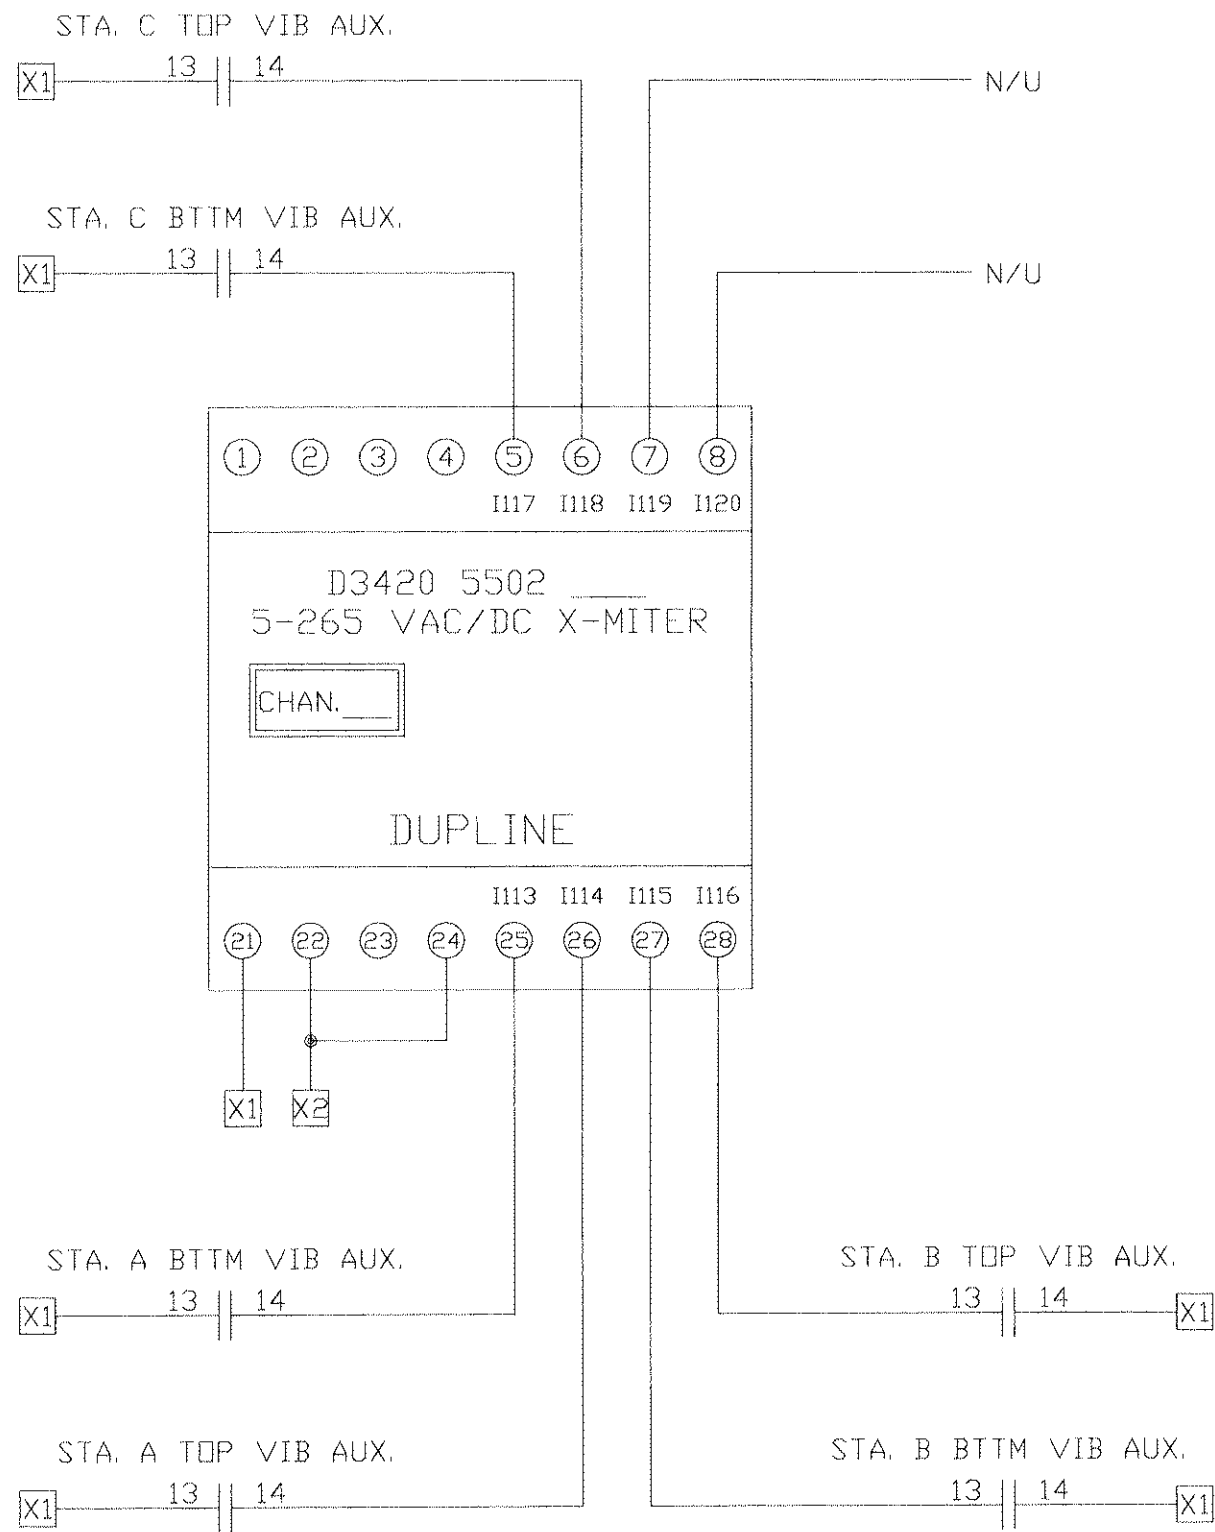


NOTE: STATION A CORE BOX WILL HAVE 7
OVERLOADS PER CONTACTOR.
OTHER STATIONS WILL HAVE 6
OVERLOADS PER CONTACTOR.

LEGEND


- | | |
|---|---|
| - TERMINAL IN PLC PANEL | - PILOT/ALARM LAMP |
| - TERMINAL IN MACH. OPERATOR CONSOLE | - RELAY/CONTACTOR |
| - TERMINAL IN HYD. PUMP STARTER PANEL | - HYDRAULIC OR PNEUMATIC SOLENOID VALVE |
| - TERMINAL IN A TURNABLE PANEL | - PROXIMITY SWITCH |
| - TERMINATION POINT AT PLC I/O MODULE | - LIMIT SWITCH (MECHANICAL) |
| - SWITCH (PUSH BUTTON, SELECTOR, KEY, ETC.) | - ALARM HORN |

COLOR	WIRE COLOR CODE FUNCTION	VOLTAGE
WHITE	NEUTRAL	120/220VAC
BROWN	PLC INPUT	120/220VAC, 24VDC
ORANGE	PLC OUTPUT	120/220VAC, 24VDC
BLUE	PLC I/O	5-50VDC
BLACK	1 PHASE	220-600VAC
BLACK	3 PHASE	220-600VAC
GREEN	GROUND	GROUND
RED	1 PHASE	120VAC
YELLOW	PANEL TO PANEL (EXTERNALLY POWERED)	120/220VAC, 24VDC

HAWKEYE CONCRETE PRODUCTS CO. MEDIAPOLIS, IOWA						
PIPE PRO III DUPLINE TURNTABLE FIELD WIRING						
INPUTS Z1113-Z1120 OUTPUTS ZQ81-ZQ97						
TOLERANCES (UNLESS SPECIFIED)						
FRACTIONAL ±1/16" DECIMAL				ANGULAR		DISC
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	DRAWING NO.	ISSUE
N.T.S.	3/18/93	DEM		26-3	27809D	A

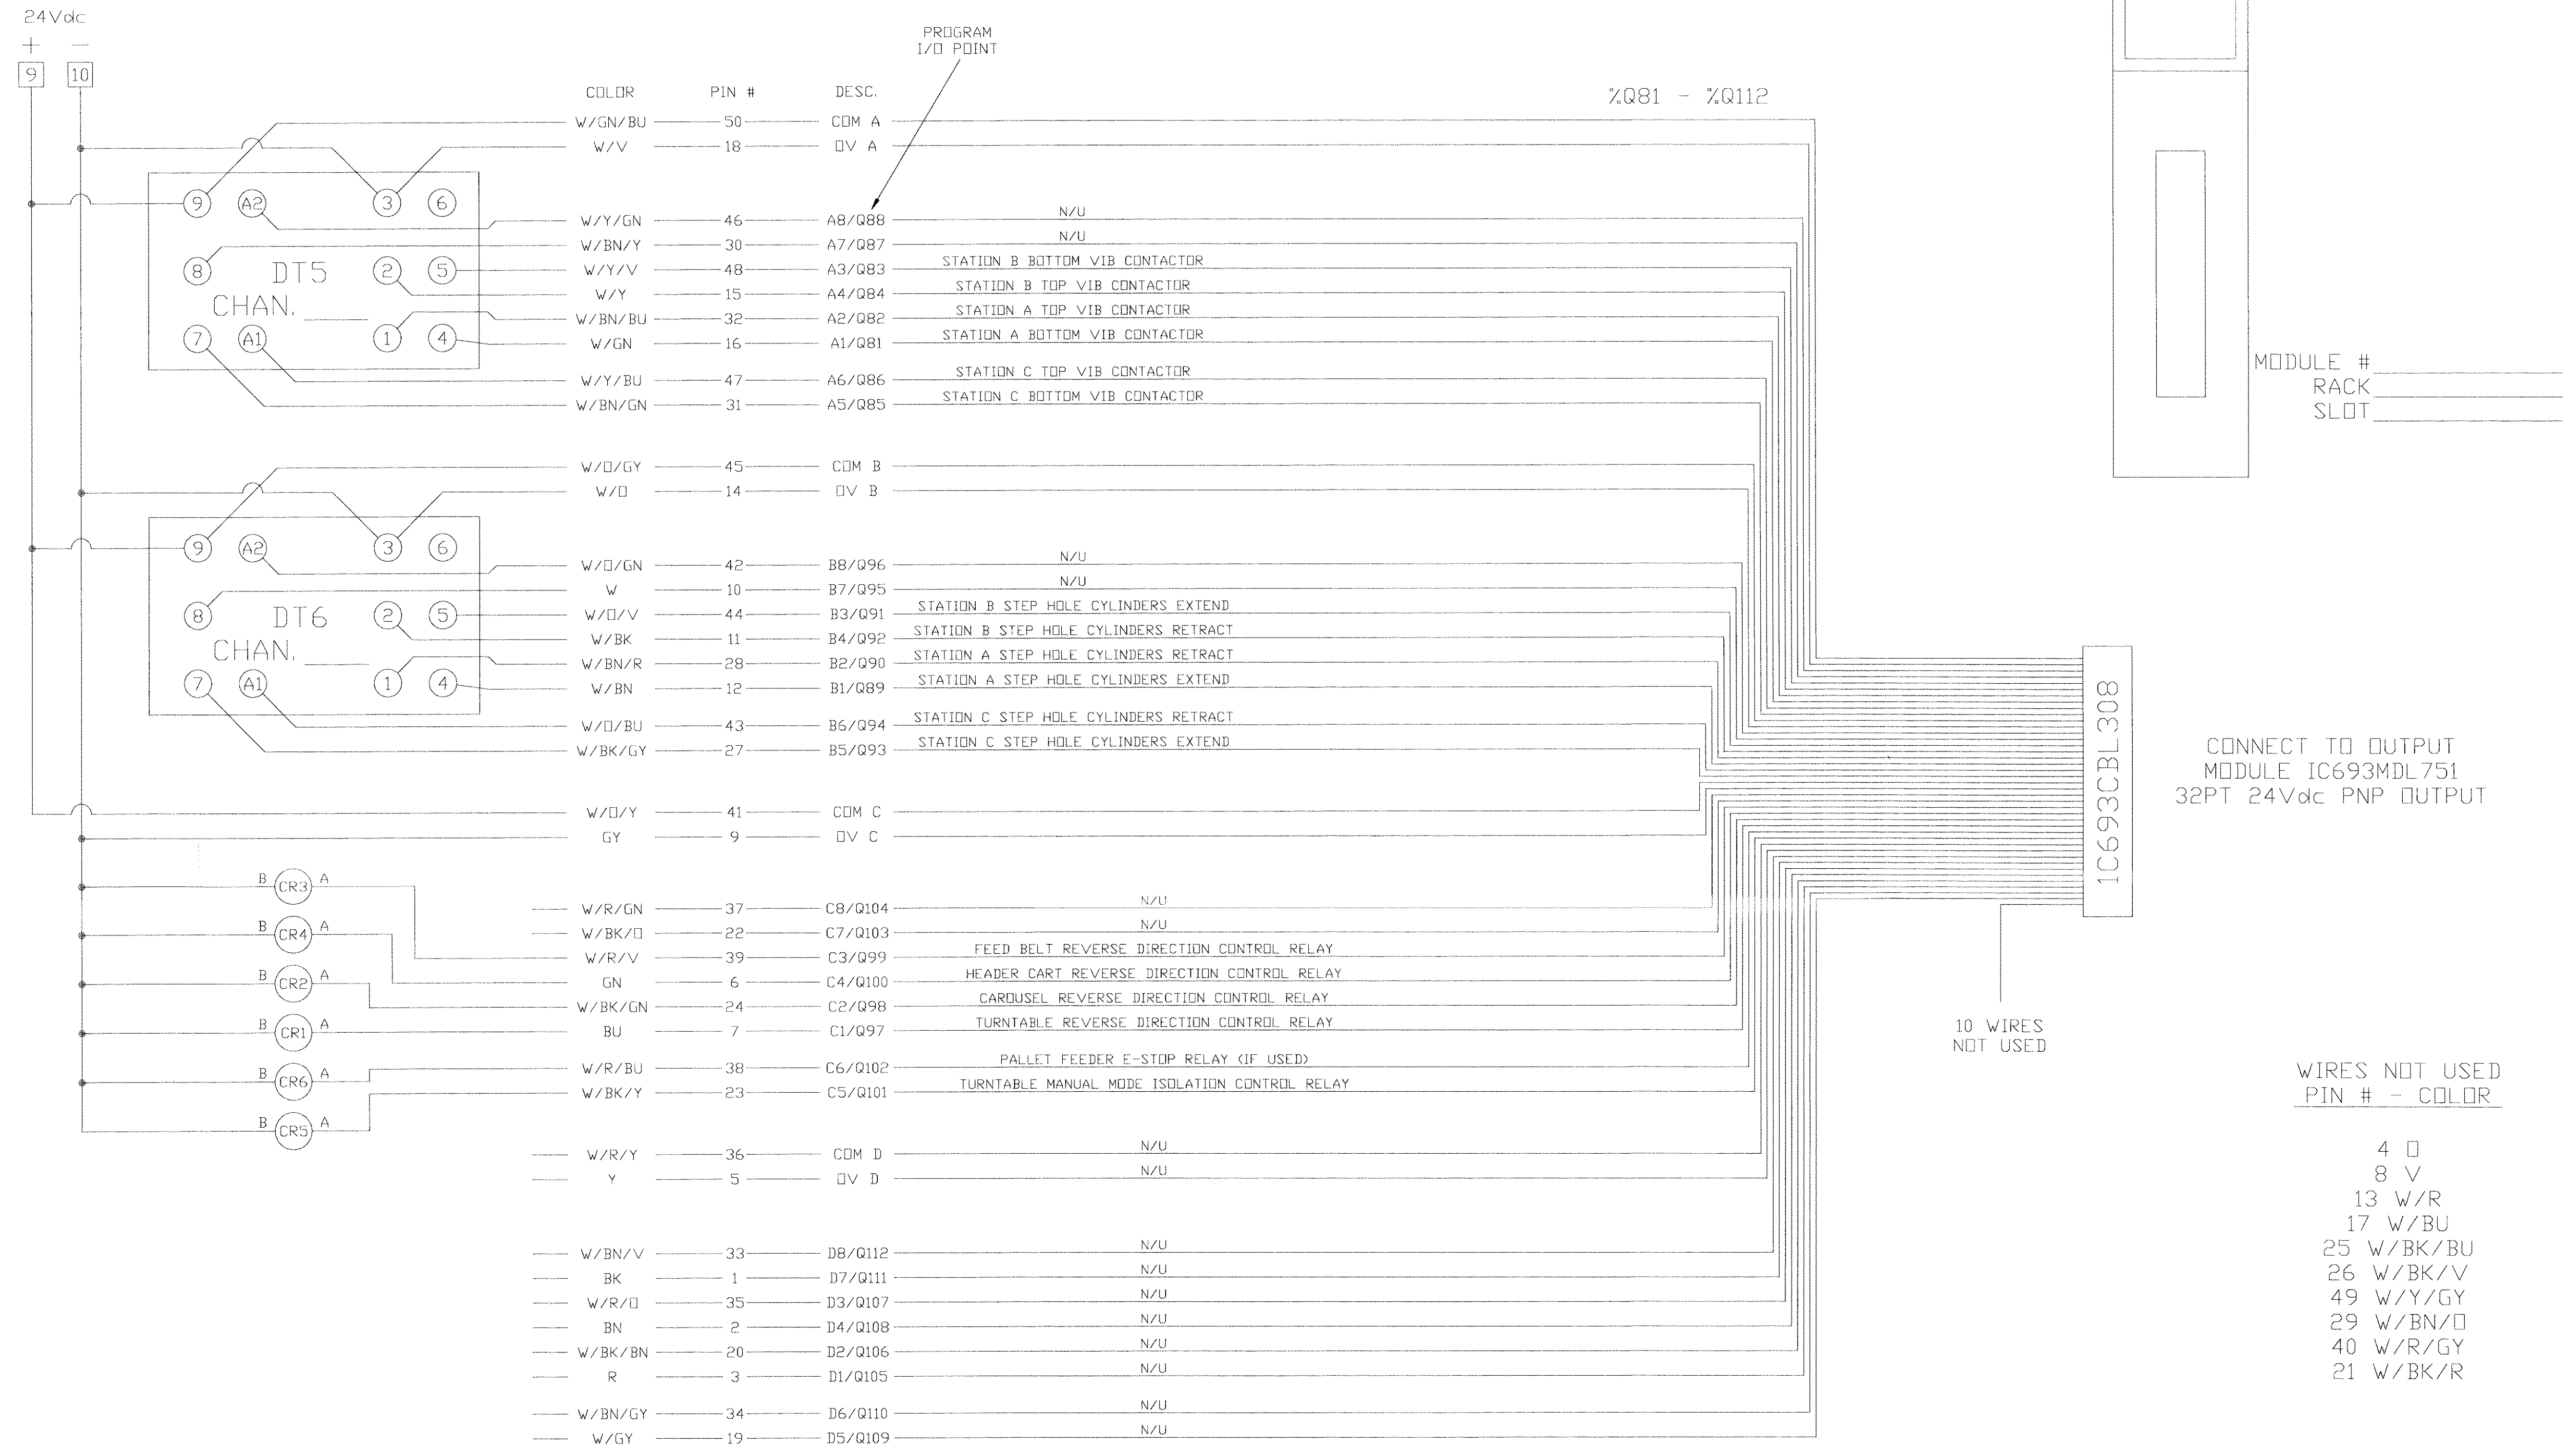


LEGEND

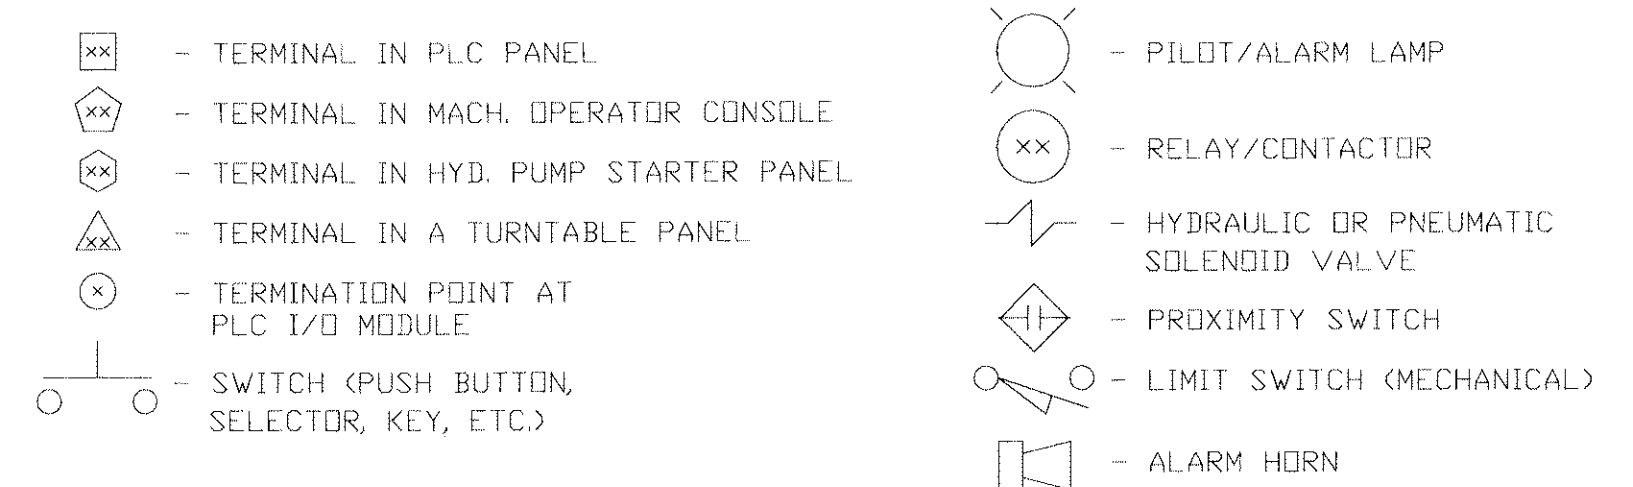


COLOR	FUNCTION	VOLTAGE
WHITE	NEUTRAL	120/220VAC
BROWN	PLC INPUT	120/220VAC, 24VDC
ORANGE	PLC OUTPUT	120/220VAC, 24VDC
BLUE	PLC I/O	5-50VDC
BLACK	1 PHASE	220-600VAC
BLACK	3 PHASE	220-600VAC
GREEN	GROUND	GROUND
RED	1 PHASE	120VAC
YELLOW	PANEL TO PANEL (EXTERNALLY POWERED)	120/220VAC, 24VDC

HAWKEYE CONCRETE PRODUCTS CO. MEDIAPOLIS, IOWA							
PIPE PRO III DUPLINE TRANSMITER DIAGRAM (DUPLINE DEVICES IN PLC PANEL) %Q81 - %Q112							
TOLERANCES (UNLESS SPECIFIED)							
FRACTIONAL ±1/16" DECIMAL				ANGULAR		DISC	
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	DRAWING NO.	ISSUE	
N.T.S.	5/4/93	DEM		26-3	27807D	B	


P-HEAD CAROUSEL

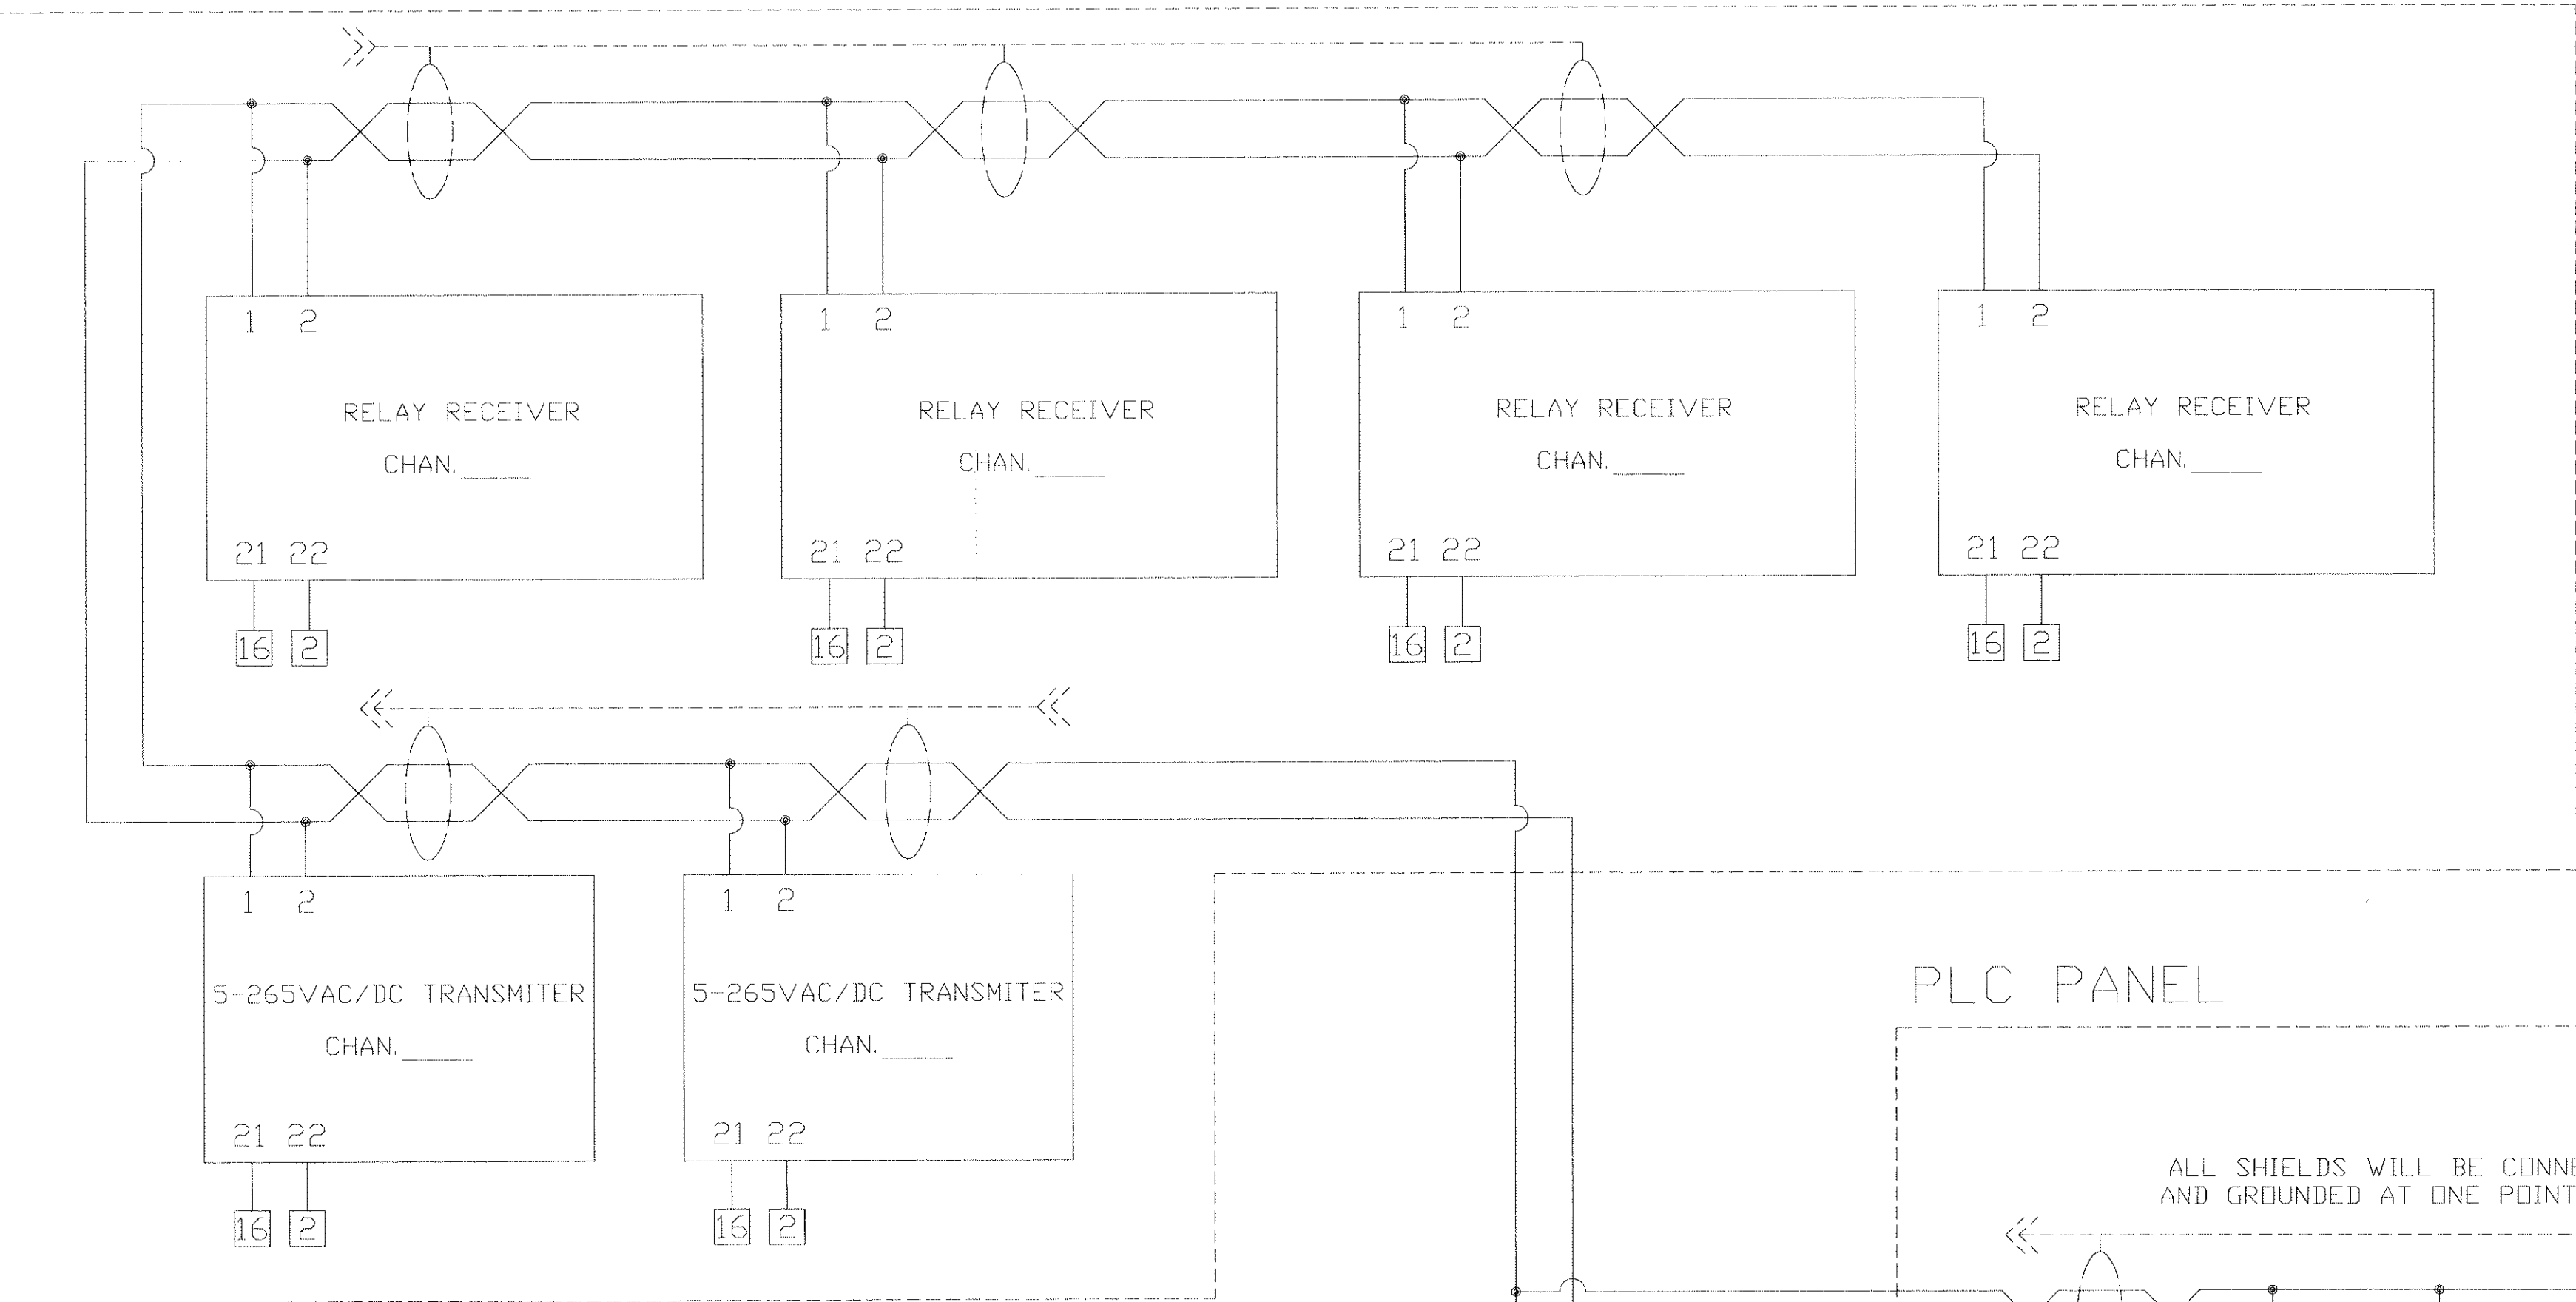

PLC PANEL

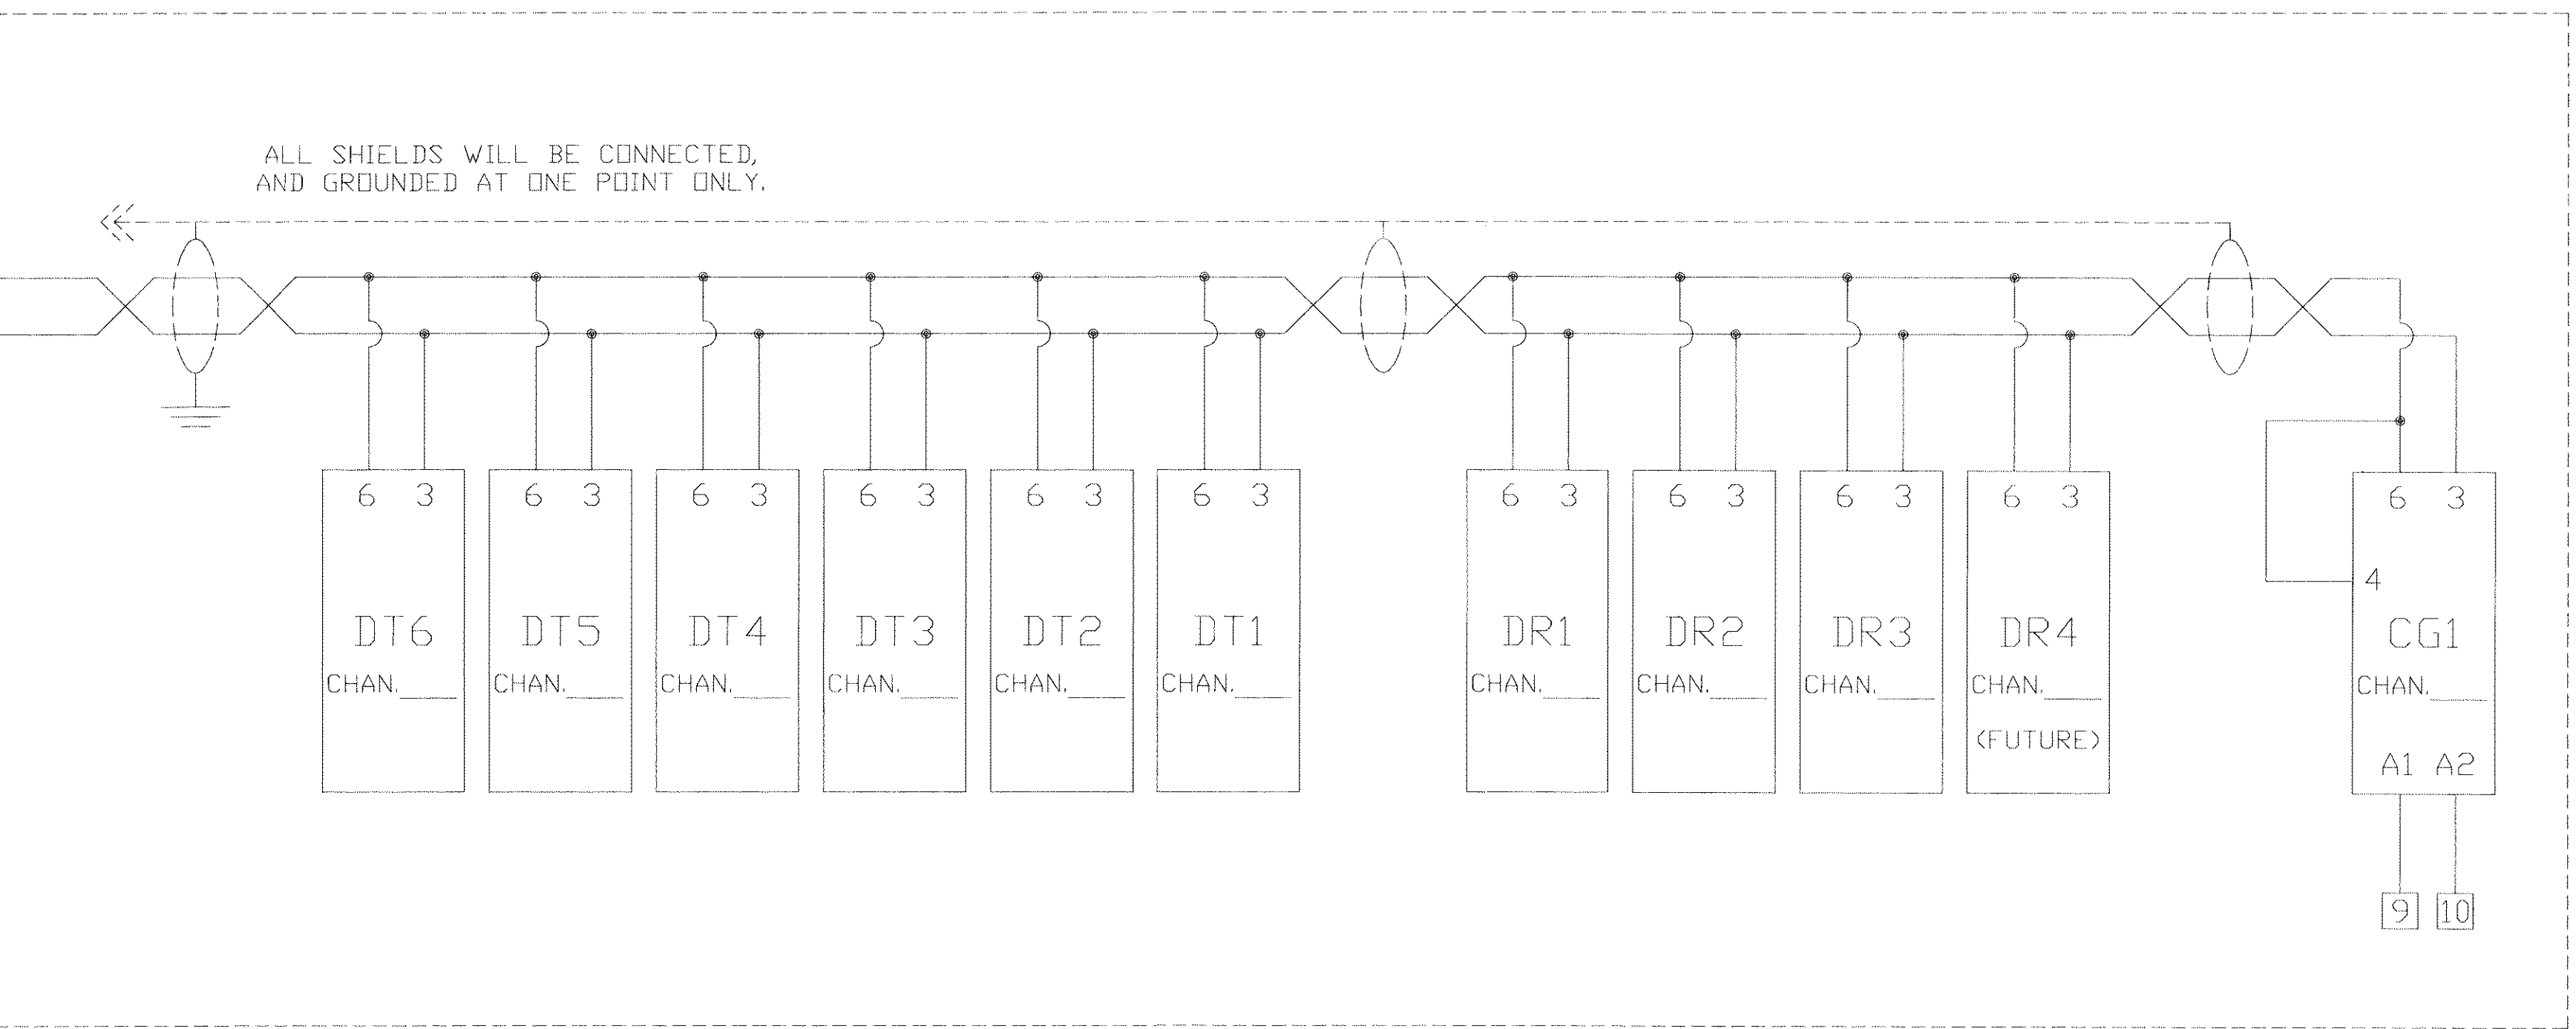

TURNTABLE

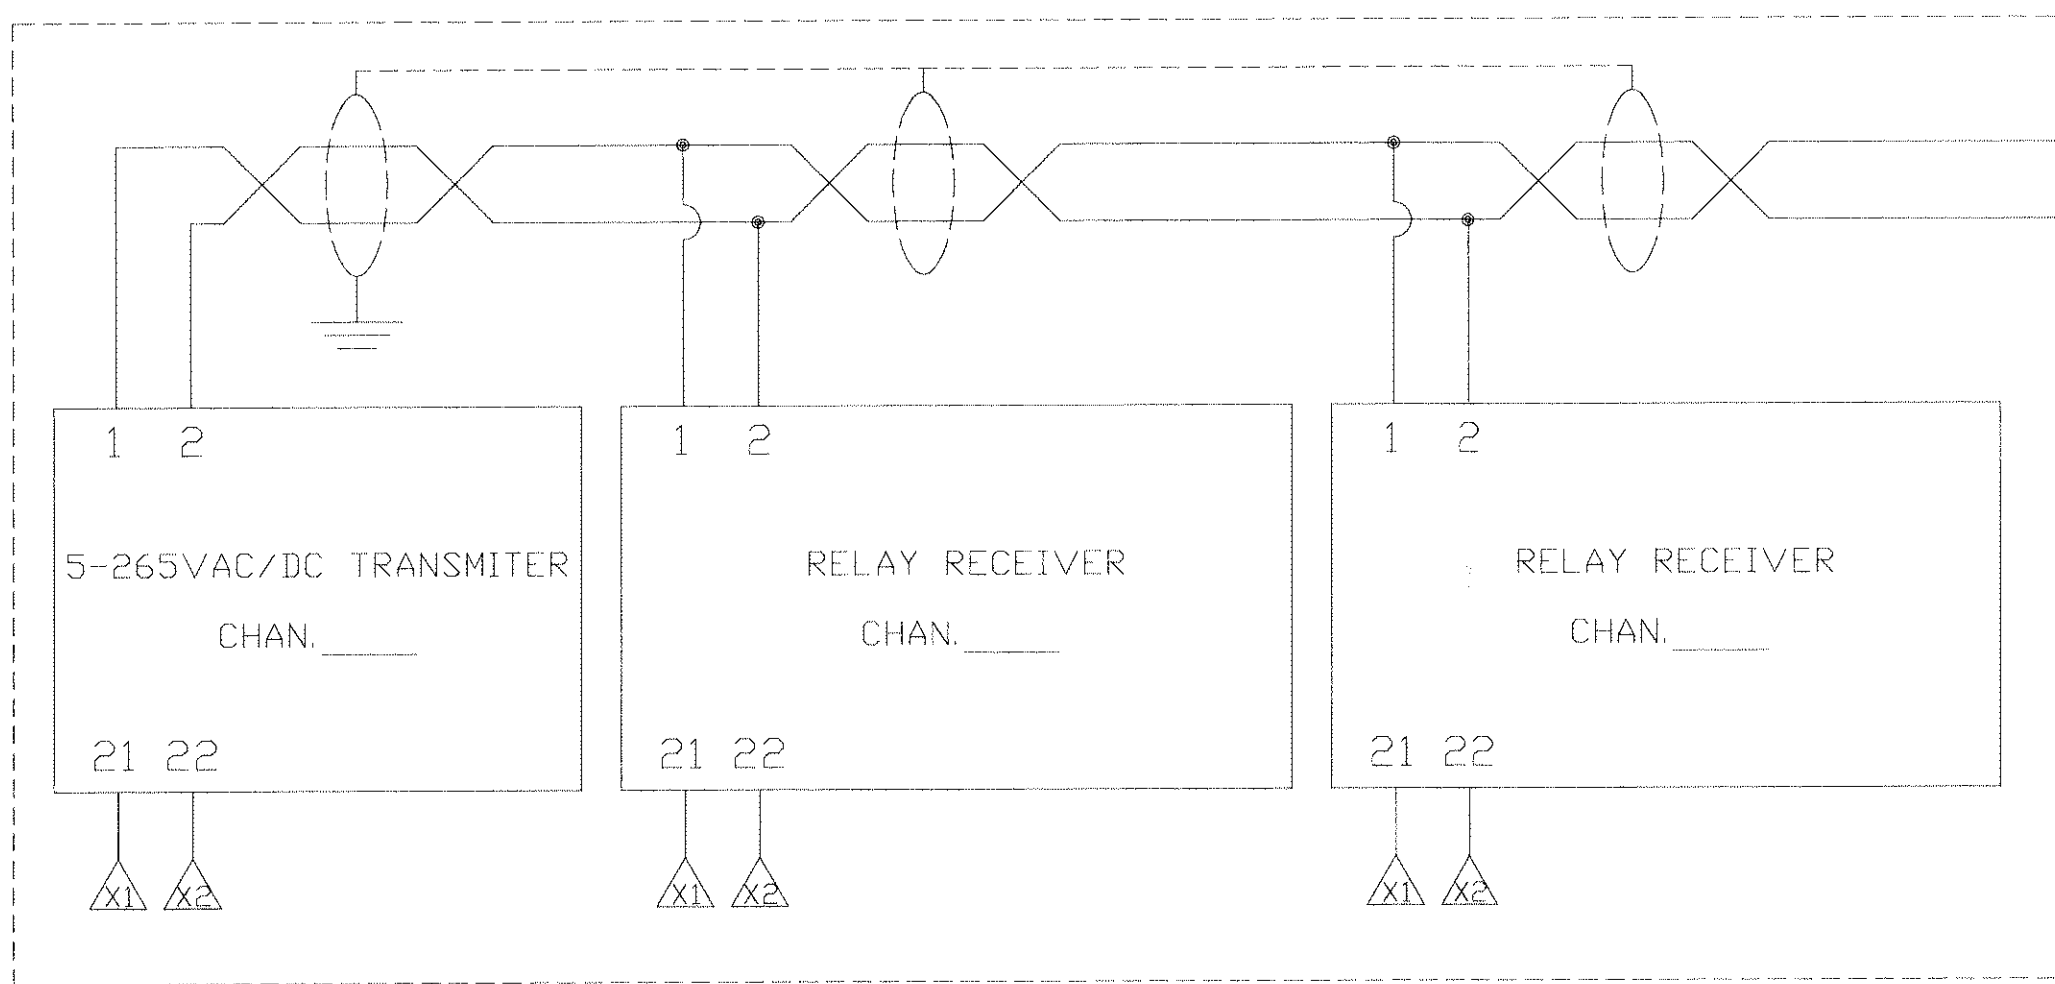

DUPLINE COMM. CABLE IS TO BE
18AWG JACKETED/SHIELDED TWISTED
PAIR BELDEN OR EQUAL

ORDER OF DEVICE CONNECTION IS NOT IMPORTANT

WIRE COLOR CODE		
COLOR	FUNCTION	VOLTAGE
WHITE	NEUTRAL	120/220VAC
BROWN	PLC INPUT	120/220VAC, 24VDC
ORANGE	PLC OUTPUT	120/220VAC, 24VDC
BLUE	PLC I/O	5-50VDC
BLACK	1 PHASE	220-600VAC
BLACK	3 PHASE	220-600VAC
GREEN	GROUND	GROUND
RED	1 PHASE	120VAC
YELLOW	PANEL TO PANEL	120/220VAC, 24VDC
	(EXTERNALLY POWERED)	

LEGEND

	- TERMINAL IN PLC PANEL		- PILOT/ALARM LAMP
	- TERMINAL IN MACH. OPERATOR CONSOLE		- RELAY/CONTACTOR
	- TERMINAL IN HYD. PUMP STARTER PANEL		- HYDRAULIC OR PNEUMATIC SOLENOID VALVE
	- TERMINAL IN A TURNABLE PANEL		- PROXIMITY SWITCH
	- TERMINATION POINT AT PLC I/O MODULE		- LIMIT SWITCH (MECHANICAL)
	- SWITCH (PUSH BUTTON, SELECTOR, KEY, ETC.)		- ALARM HORN

HAWKEYE CONCRETE PRODUCTS CO.					
MEDIAPOLIS, IOWA					
PIPE PRO III DUPLINE DATA COMM. CABLE WIRING					
TOLERANCES (UNLESS SPECIFIED)					DISC
FRACTIONAL ±1/16" DECIMAL		ANGULAR			
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	DRAWING NO.
N.T.S.	3/18/93	DEM		26-3	27810D
					ISSUE
					A


RACK _____
SLOT _____

ANALOG
OUTPUT MODULE
ALG390


%AQ3 - %AQ4

NOTE: WHITE & GREEN WIRES TO THE POWER PLUGS
MAY BE SWITCHED @ ANY POINT TO
CORRECT MOTOR ROTATION DIRECTION.

VICKERS
PROP. VALVE
POWER PLUG
EHH-AMP-702-E10

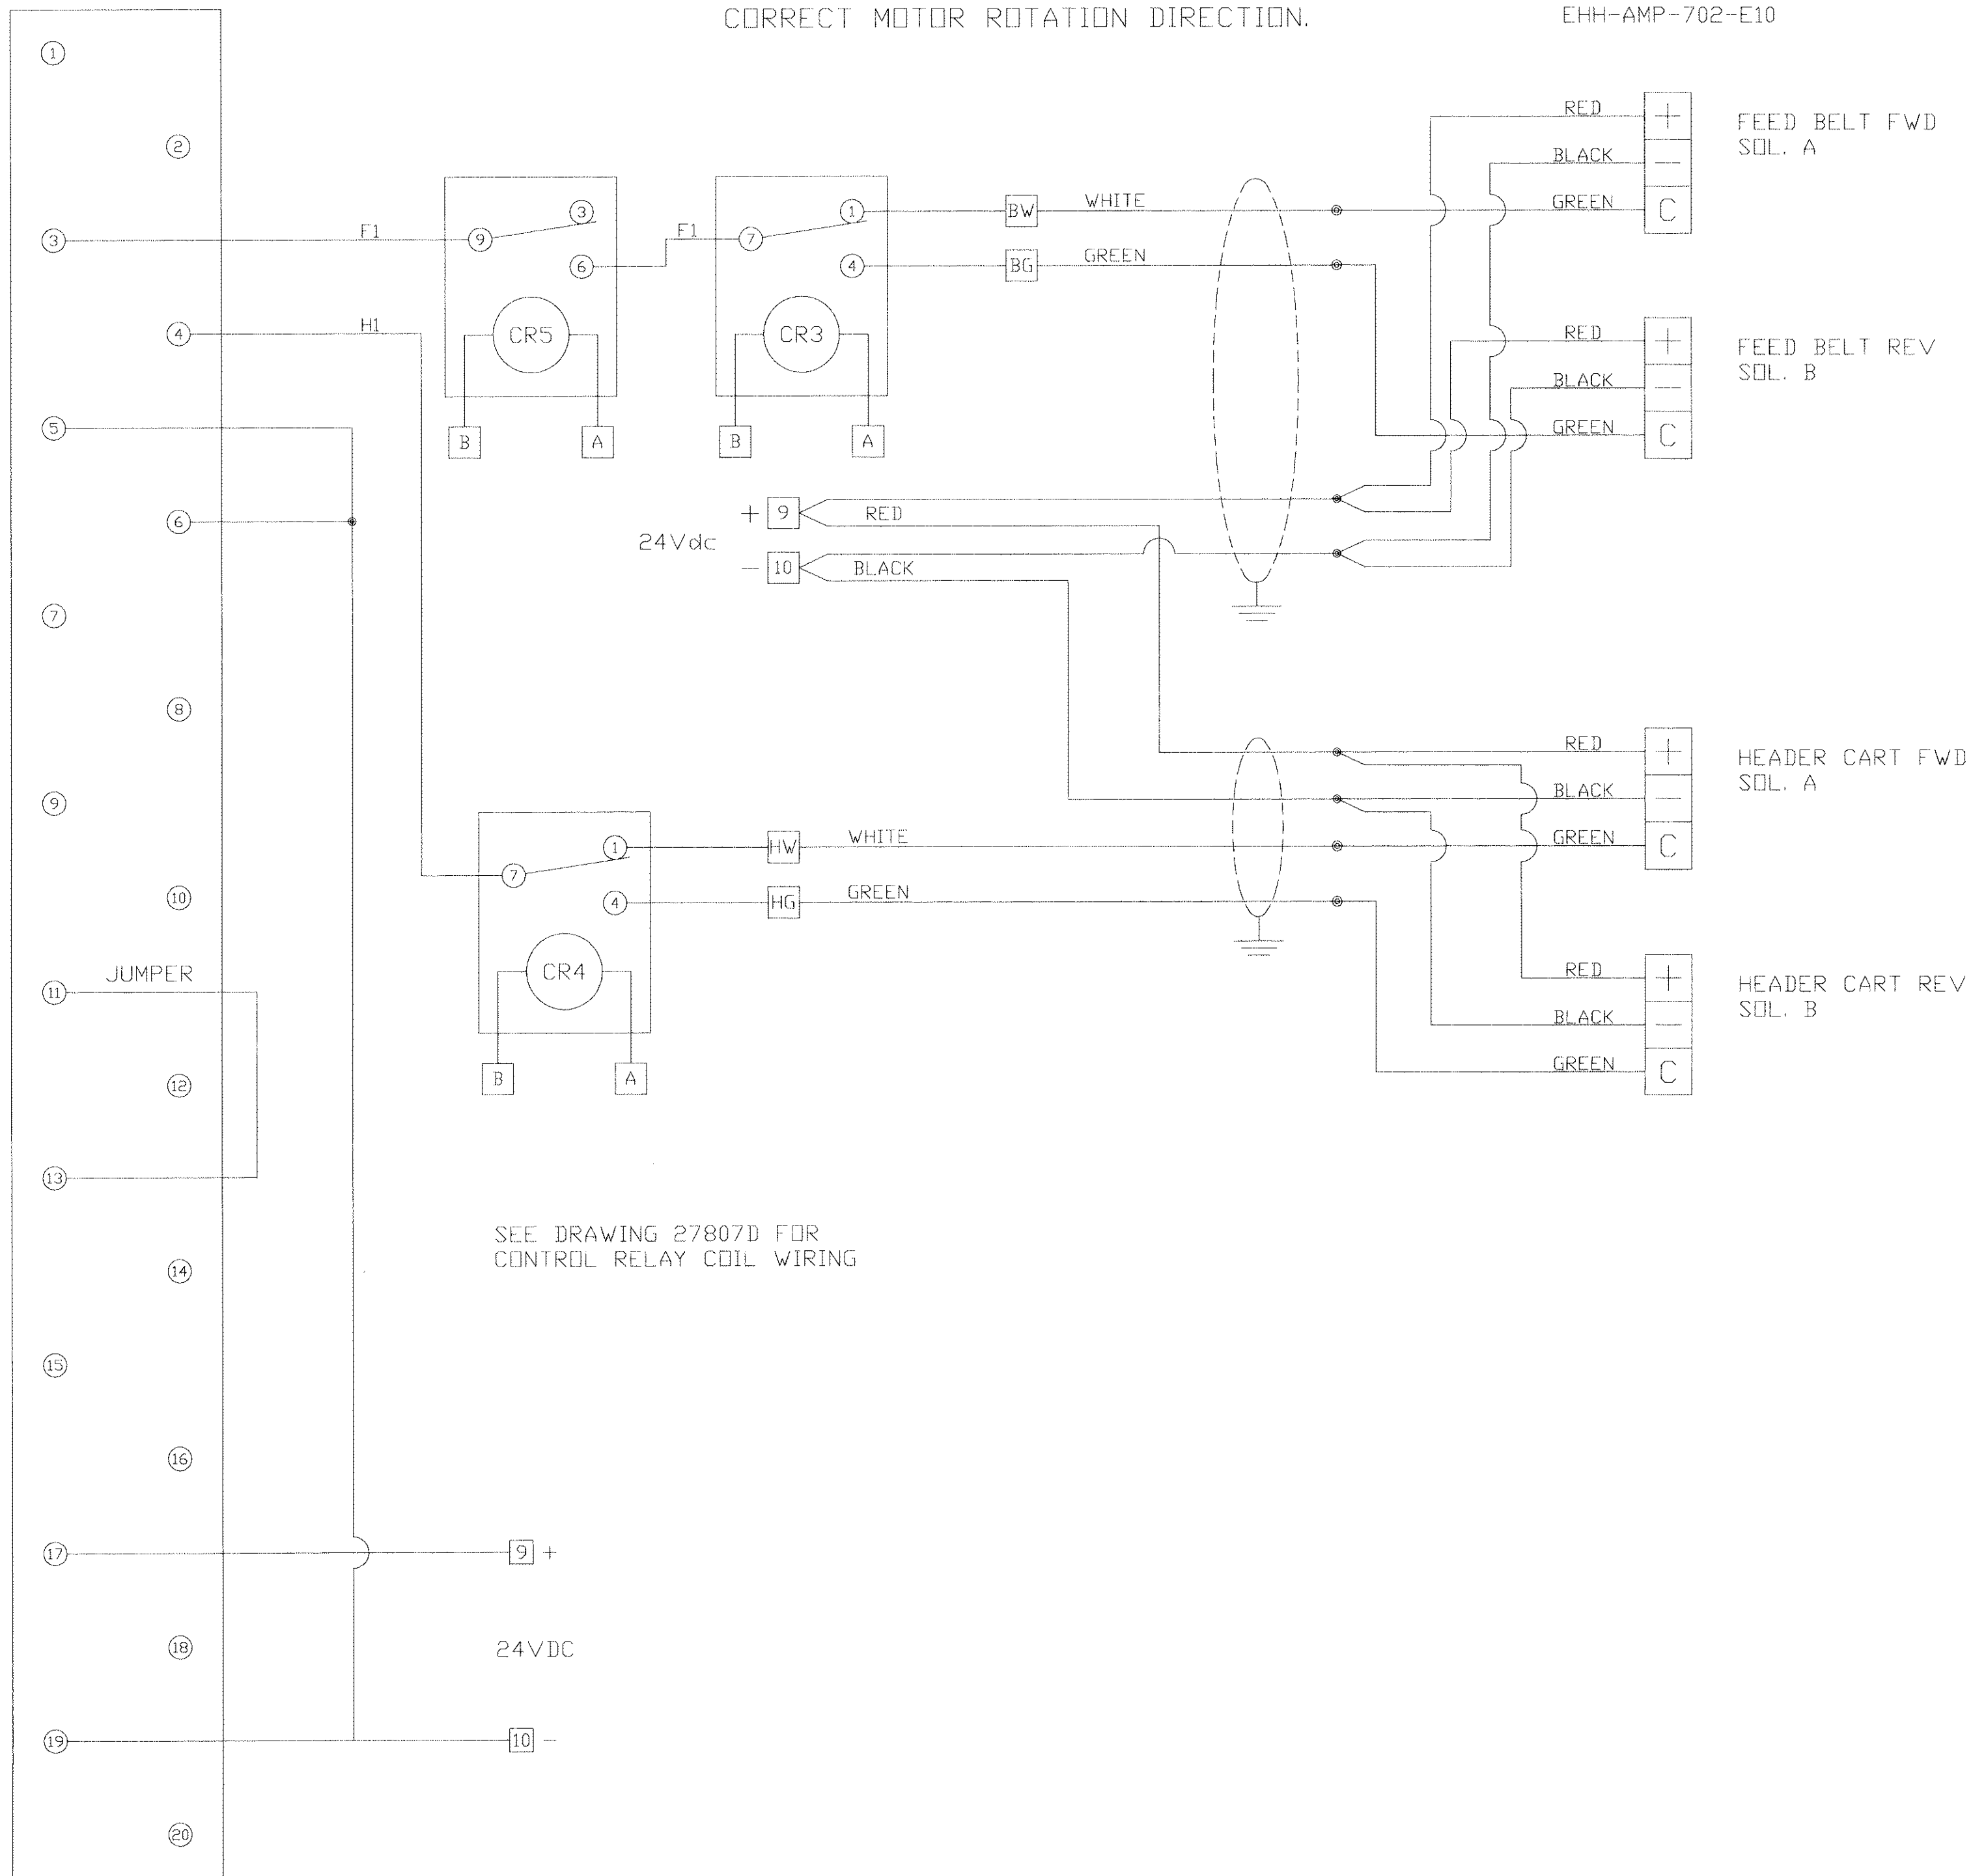

MANUAL SWITCH WIRING

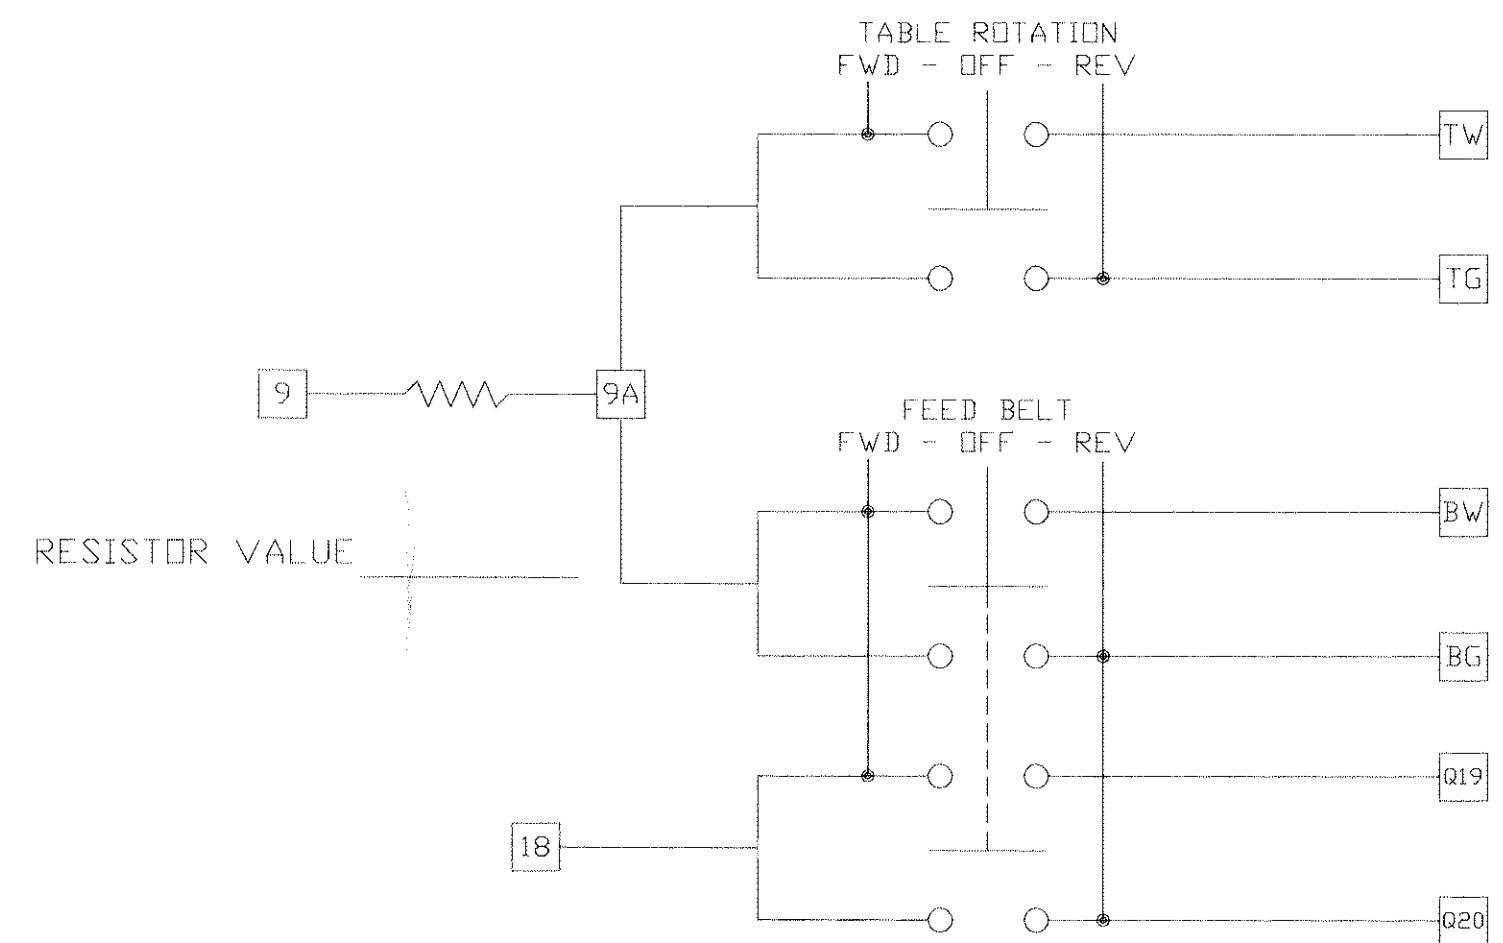



SEE DRAWING 27807D FOR
CONTROL RELAY COIL WIRING

LEGEND

- | | | | |
|--|---|--|---|
| | - TERMINAL IN PLC PANEL | | - PILOT/ALARM LAMP |
| | - TERMINAL IN MACH. OPERATOR CONSOLE | | - RELAY/CONTACTOR |
| | - TERMINAL IN HYD. PUMP STARTER PANEL | | - HYDRAULIC OR PNEUMATIC SOLENOID VALVE |
| | - TERMINAL IN A TURNABLE PANEL | | - PROXIMITY SWITCH |
| | - TERMINATION POINT AT PLC I/O MODULE | | - LIMIT SWITCH (MECHANICAL) |
| | - SWITCH (PUSH BUTTON, SELECTOR, KEY, ETC.) | | - ALARM HORN |

WIRE COLOR CODE		
COLOR	FUNCTION	VOLTAGE
WHITE	NEUTRAL	120/220VAC
BROWN	PLC INPUT	120/220VAC, 24VDC
ORANGE	PLC OUTPUT	120/220VAC, 24VDC
BLUE	PLC I/O	5-50VDC
BLACK	1 PHASE	220-600VAC
BLACK	3 PHASE	220-600VAC
GREEN	GROUND	GROUND
RED	1 PHASE	120VAC
YELLOW	PANEL TO PANEL (EXTERNALLY POWERED)	120/220VAC, 24VDC


HAWKEYE CONCRETE PRODUCTS CO.					
MEDIAPOLIS, IOWA					
PIPE PRO III FEED BELT AND HEADER CART					
ANALOG OUTPUT WIRING %AQ3 TO %AQ4					
TOLERANCES (UNLESS SPECIFIED)					DISC
FRACTIONAL #1/16" DECIMAL			ANGULAR		
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	DRAWING NO.
N.T.S.	3/18/93	DEM		26-3	27812D
					ISSUE
					A

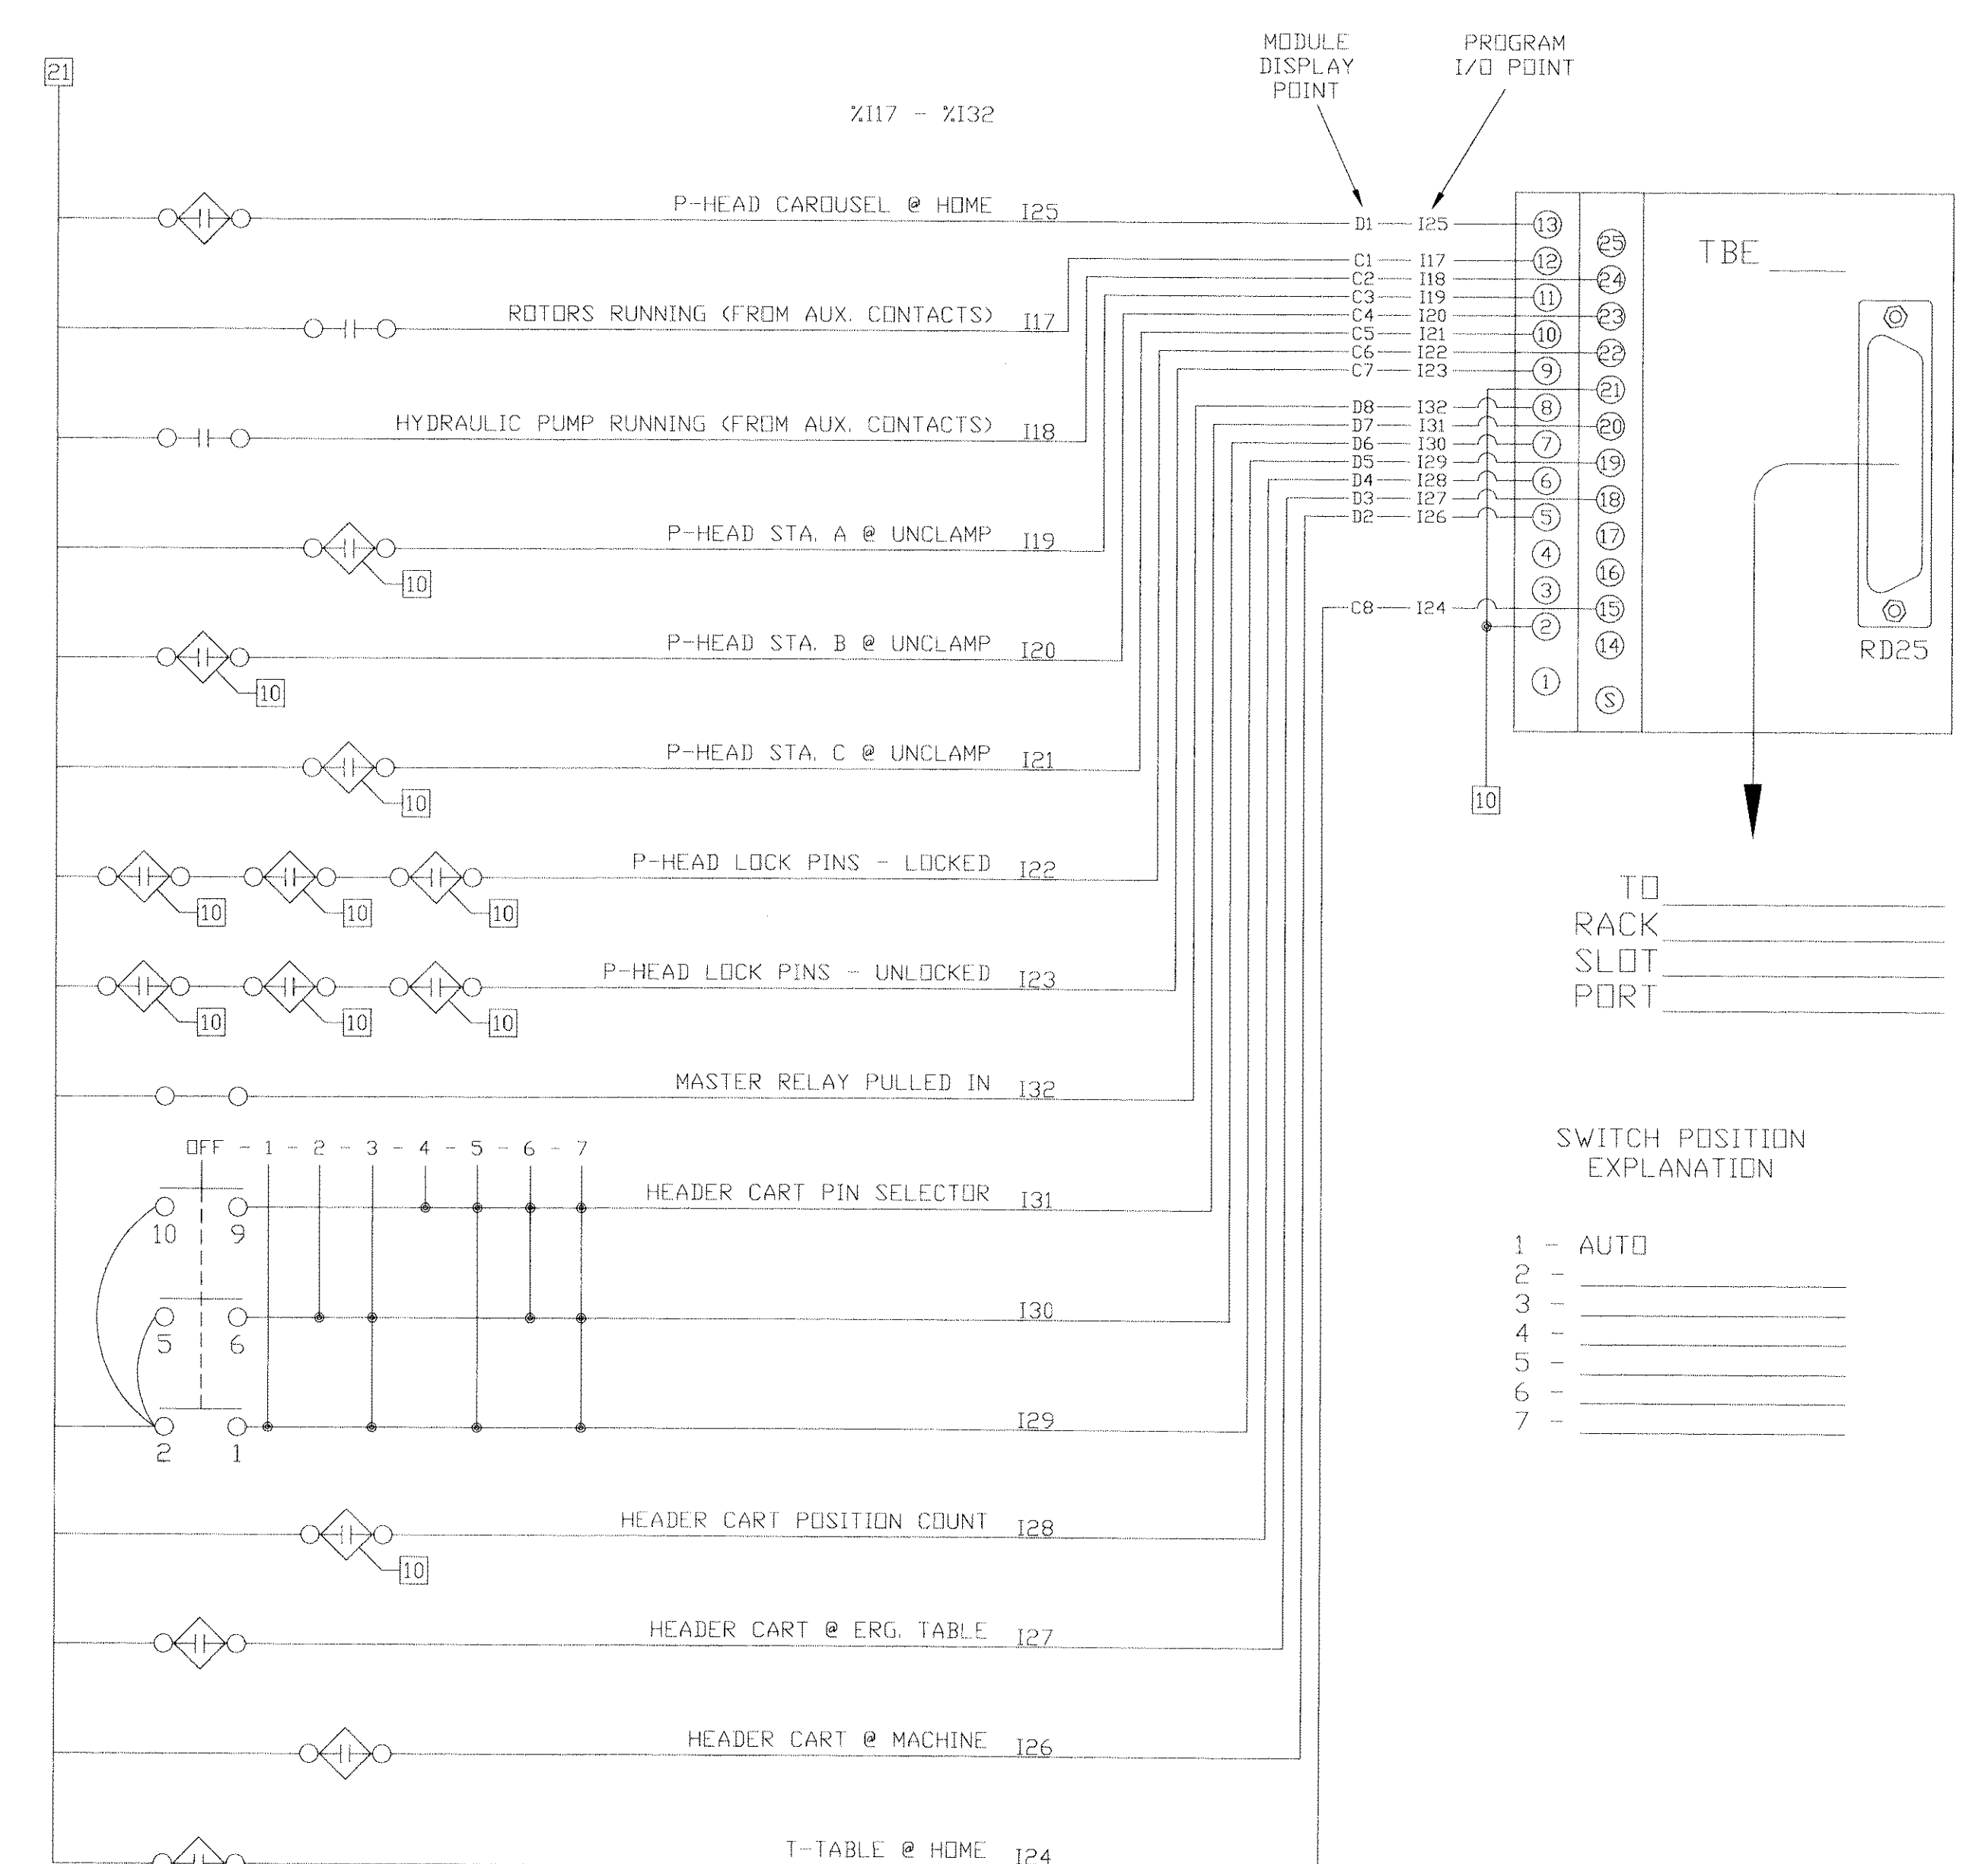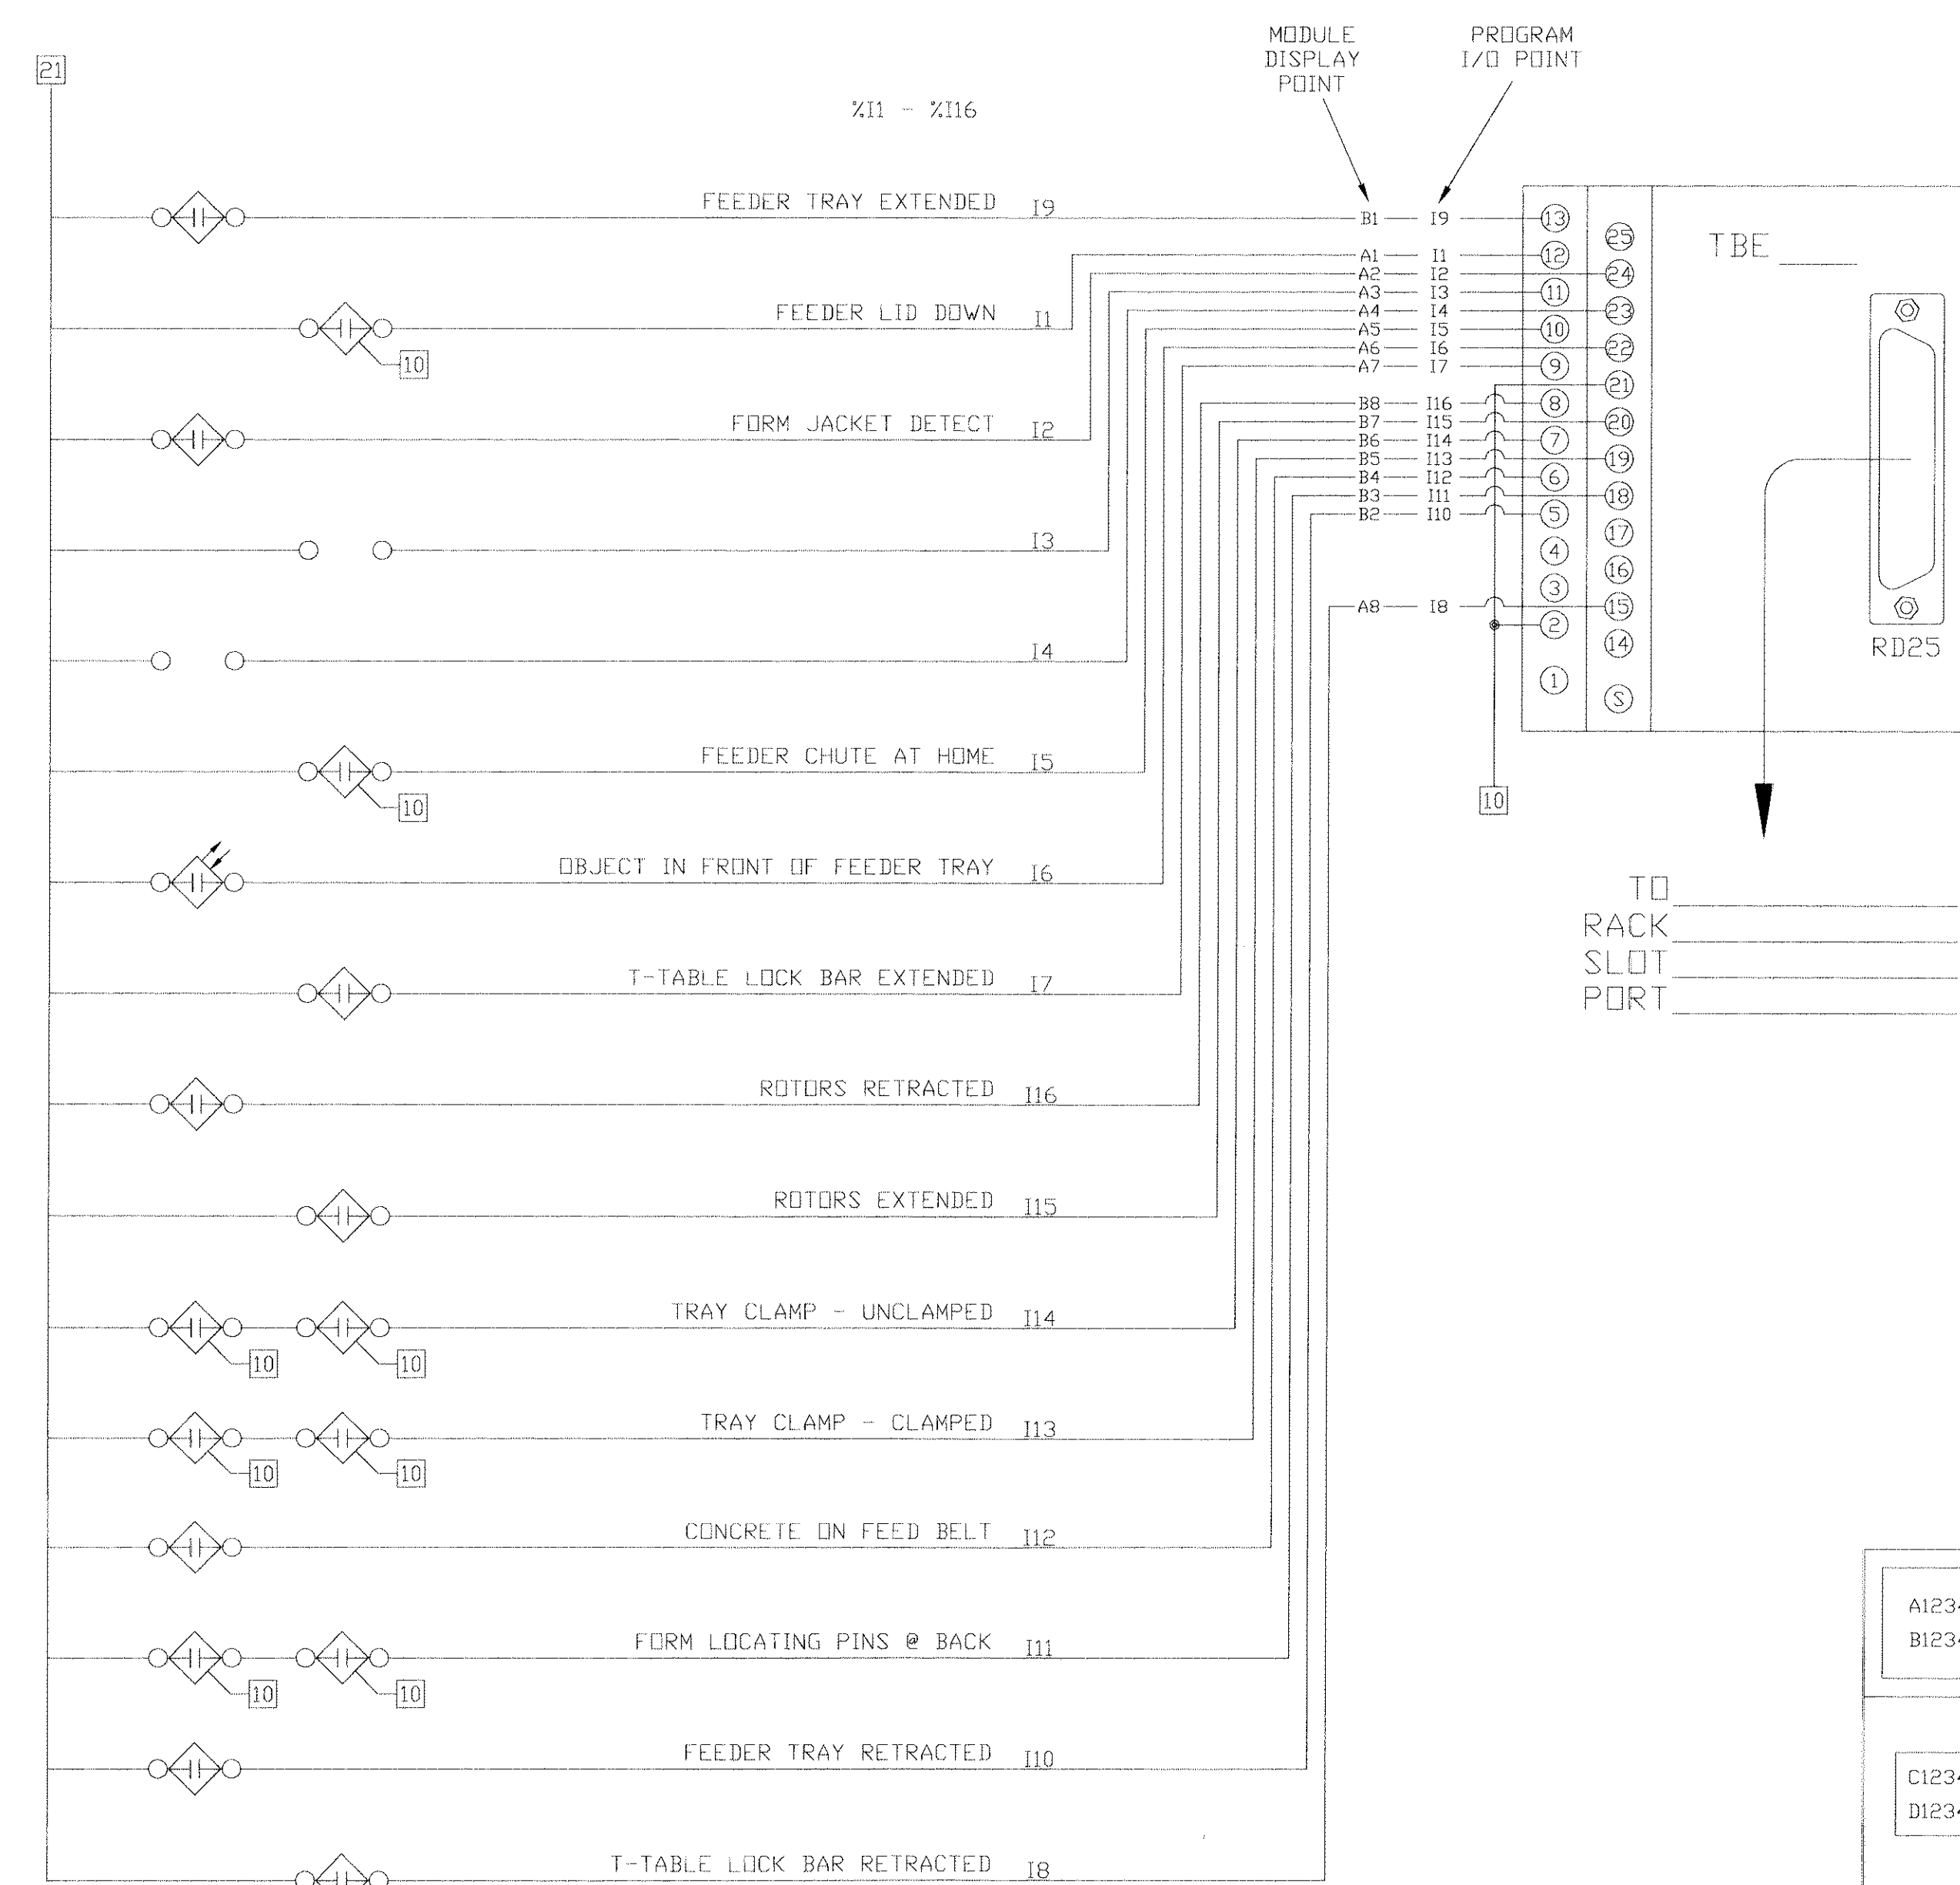

TO RACK
SLOT
PORT

SWITCH POSITION
EXPLANATION


1 - AUTO
2 -
3 -
4 -
5 -
6 -
7 -

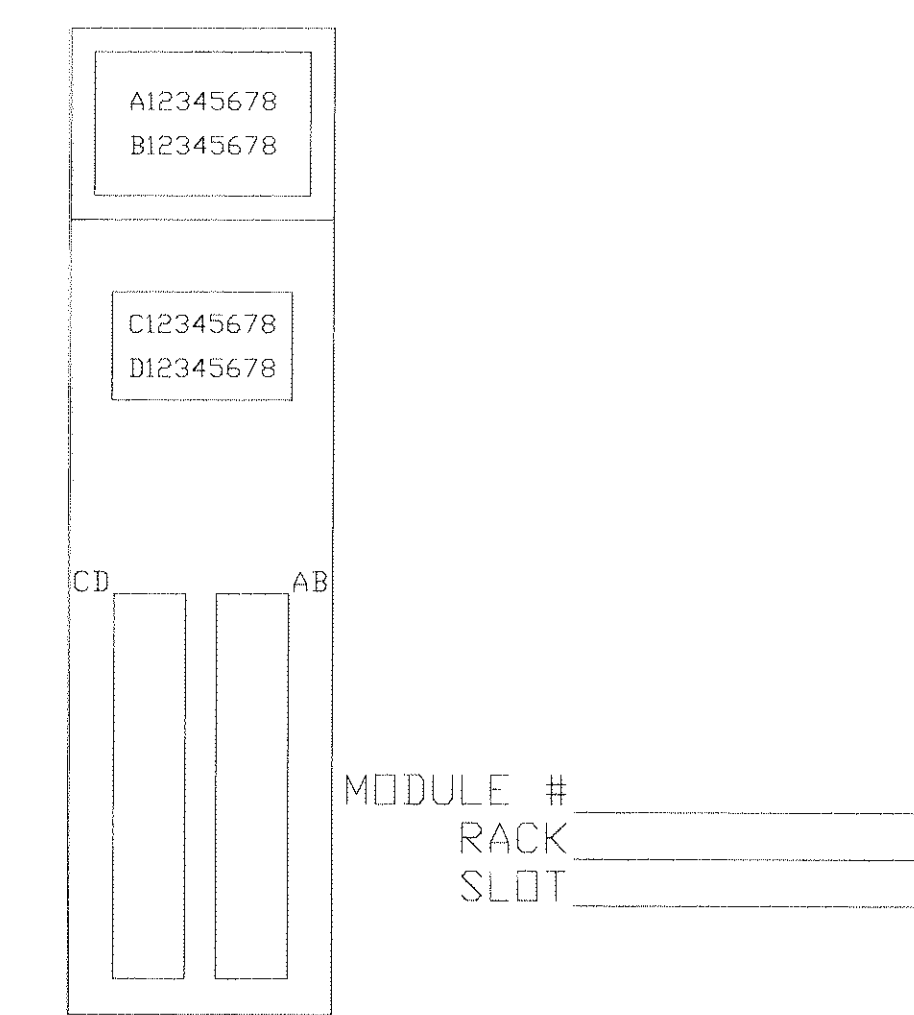



INPUT WIRING VOLTAGE _____

LEGEND	
	- TERMINAL IN PLC PANEL
	- TERMINAL IN MACH. OPERATOR CONSOLE
	- TERMINAL IN HYD. PUMP STARTER PANEL
	- TERMINAL IN A TURNABLE PANEL
	- TERMINATION POINT AT PLC I/O MODULE
	- SWITCH (PUSH BUTTON, SELECTOR, KEY, ETC.)
	- PILOT/ALARM LAMP
	- RELAY/CONTACTOR
	- HYDRAULIC OR PNEUMATIC SOLENOID VALVE
	- PROXIMITY SWITCH
	- LIMIT SWITCH (MECHANICAL)
	- ALARM HORN


WIRE COLOR CODE		
COLOR	FUNCTION	VOLTAGE
WHITE	NEUTRAL	120/220VAC
BROWN	PLC INPUT	120/220VAC, 24VDC
ORANGE	PLC OUTPUT	120/220VAC, 24VDC
BLUE	PLC I/O	5-50VDC
BLACK	1 PHASE	220-600VAC
BLACK	3 PHASE	220-600VAC
GREEN	GROUND	GROUND
RED	1 PHASE	120VAC
YELLOW	PANEL TO PANEL	120/220VAC, 24VDC (EXTERNALLY POWERED)

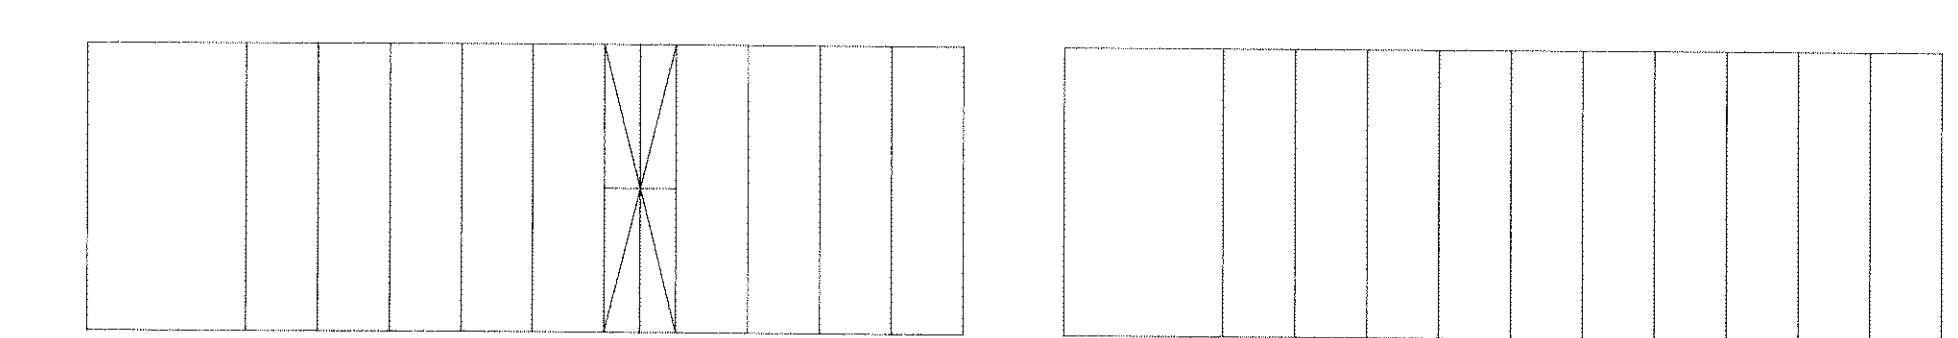

HAWKEYE CONCRETE PRODUCTS CO. MEDIAPOLIS, IOWA					
PIPE PRO III INPUT WIRING %I1 TO %I32					
TOLERANCES (UNLESS SPECIFIED)					DISC
FRACTIONAL 1/16" DECIMAL		ANGULAR		DRAWING NO. ISSUE	
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	
N.T.S.	5/4/93	DEM		26-3	27800D B

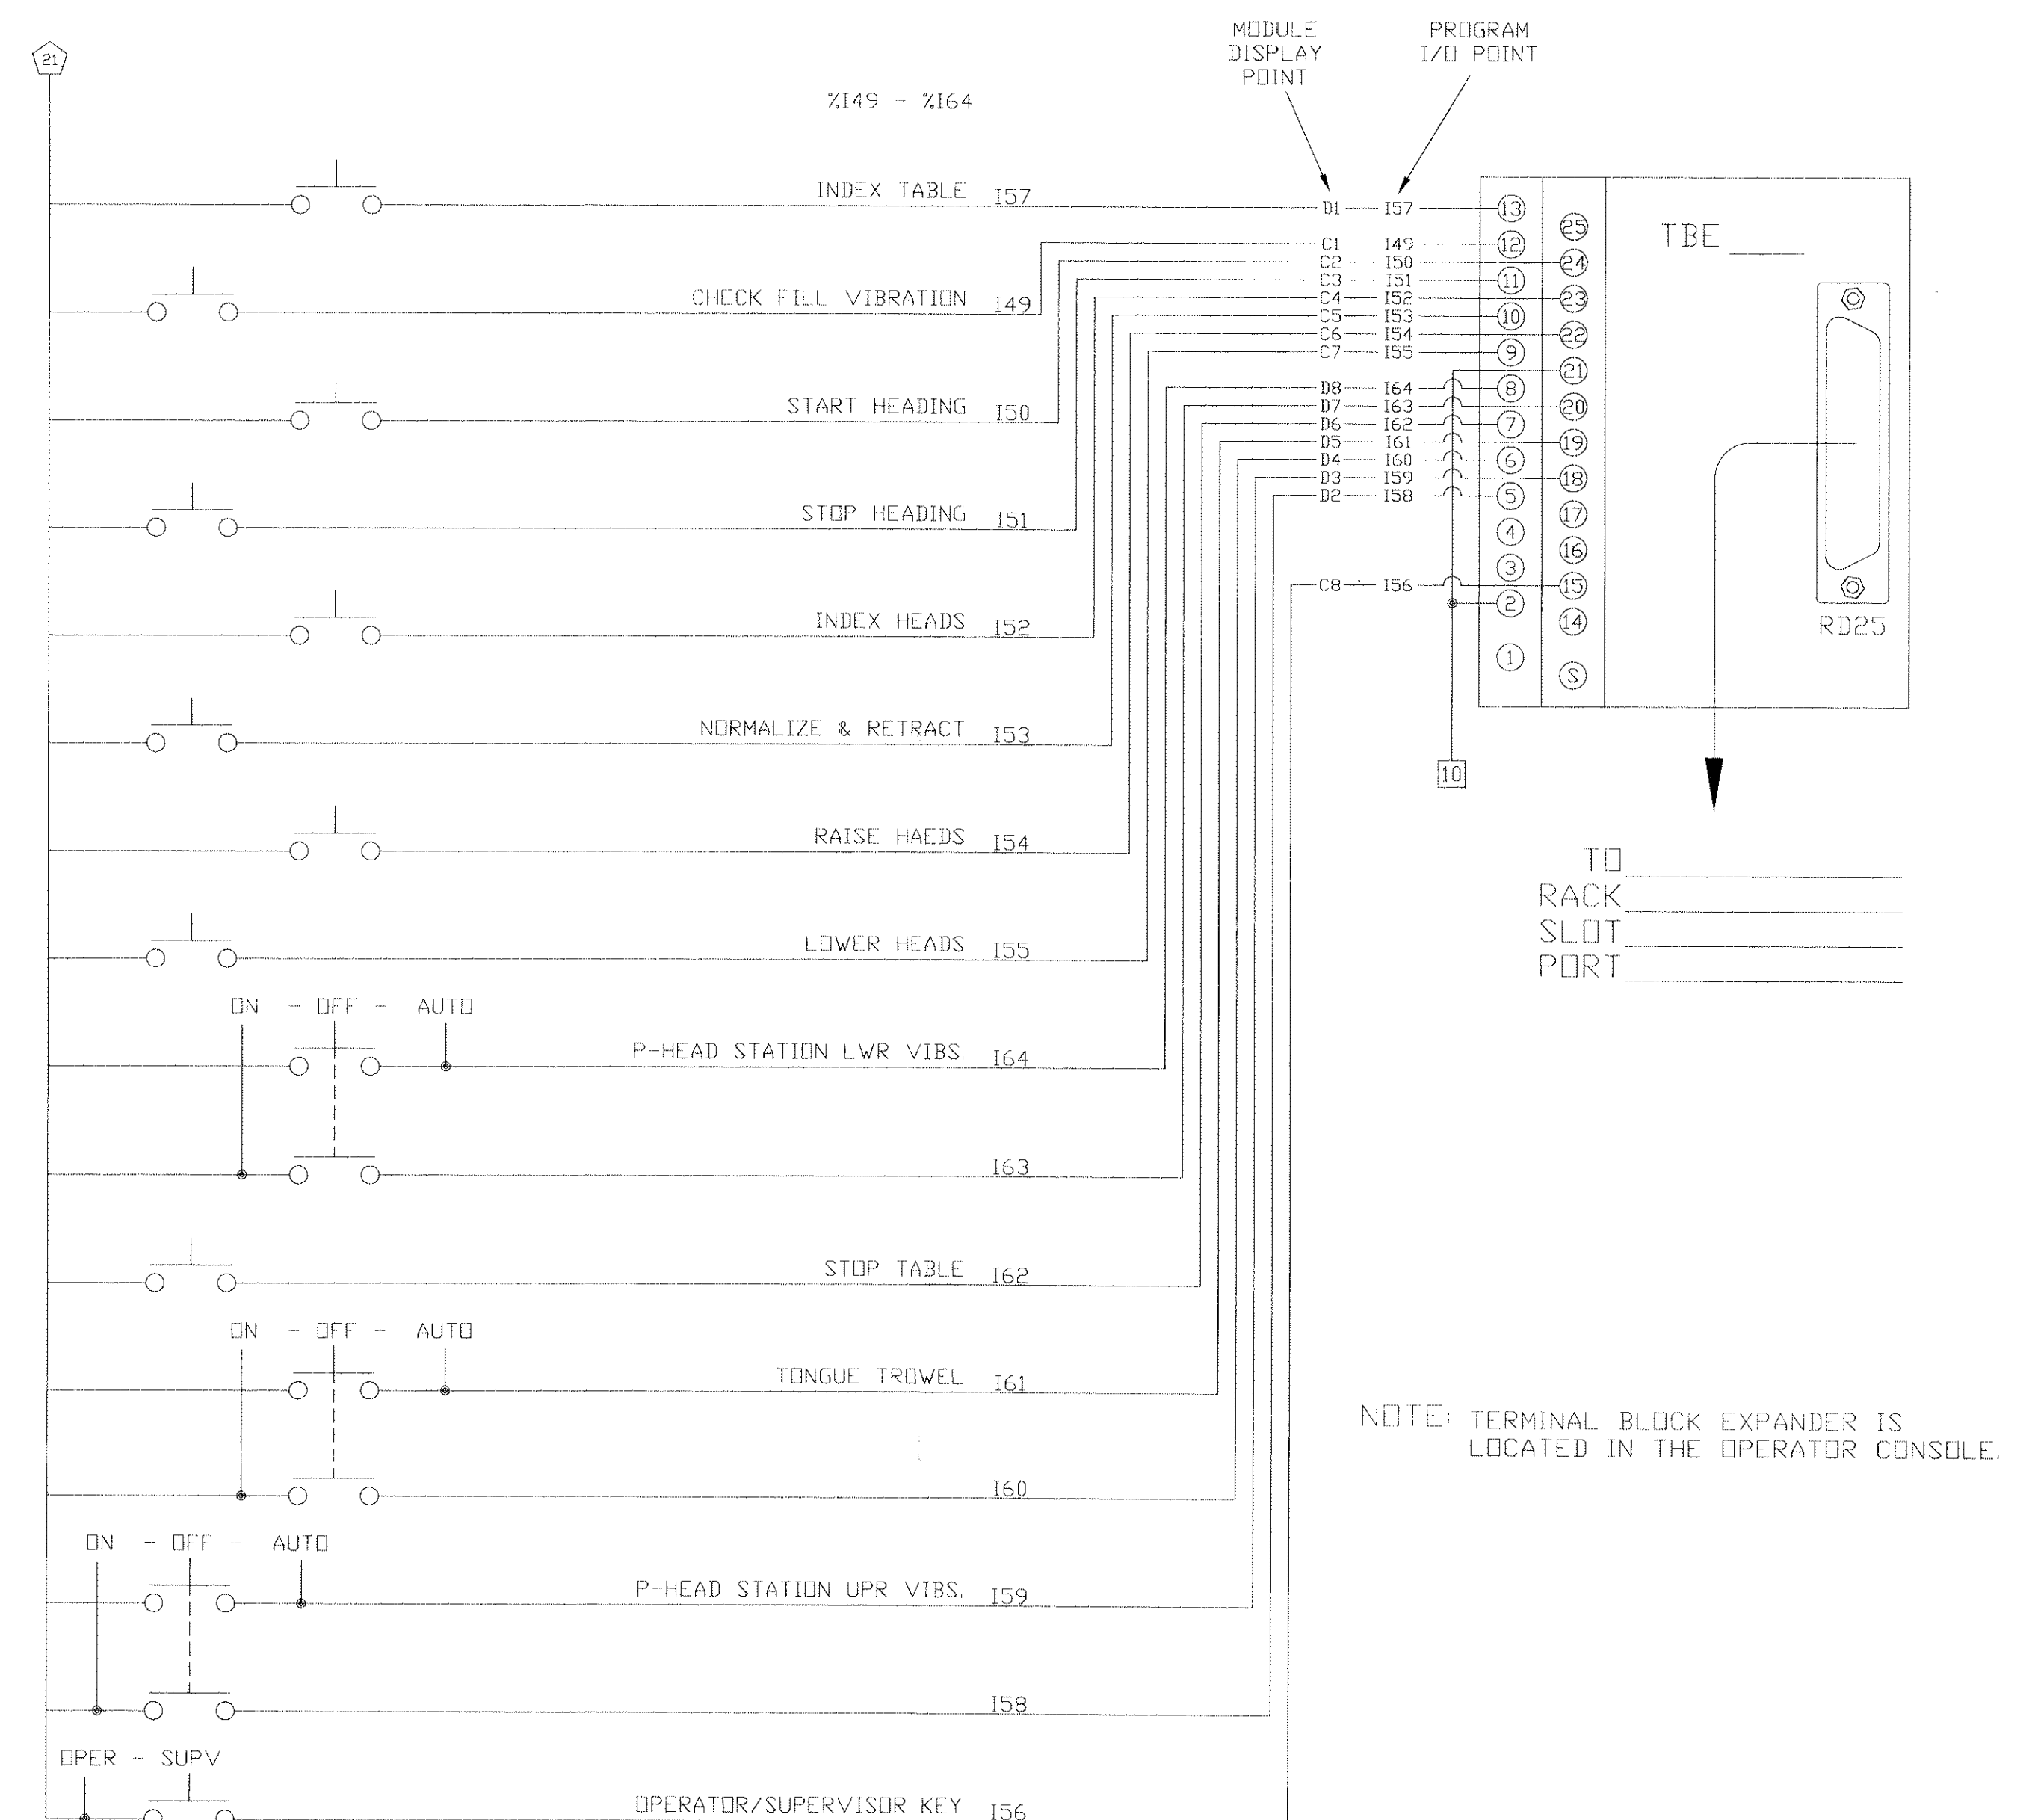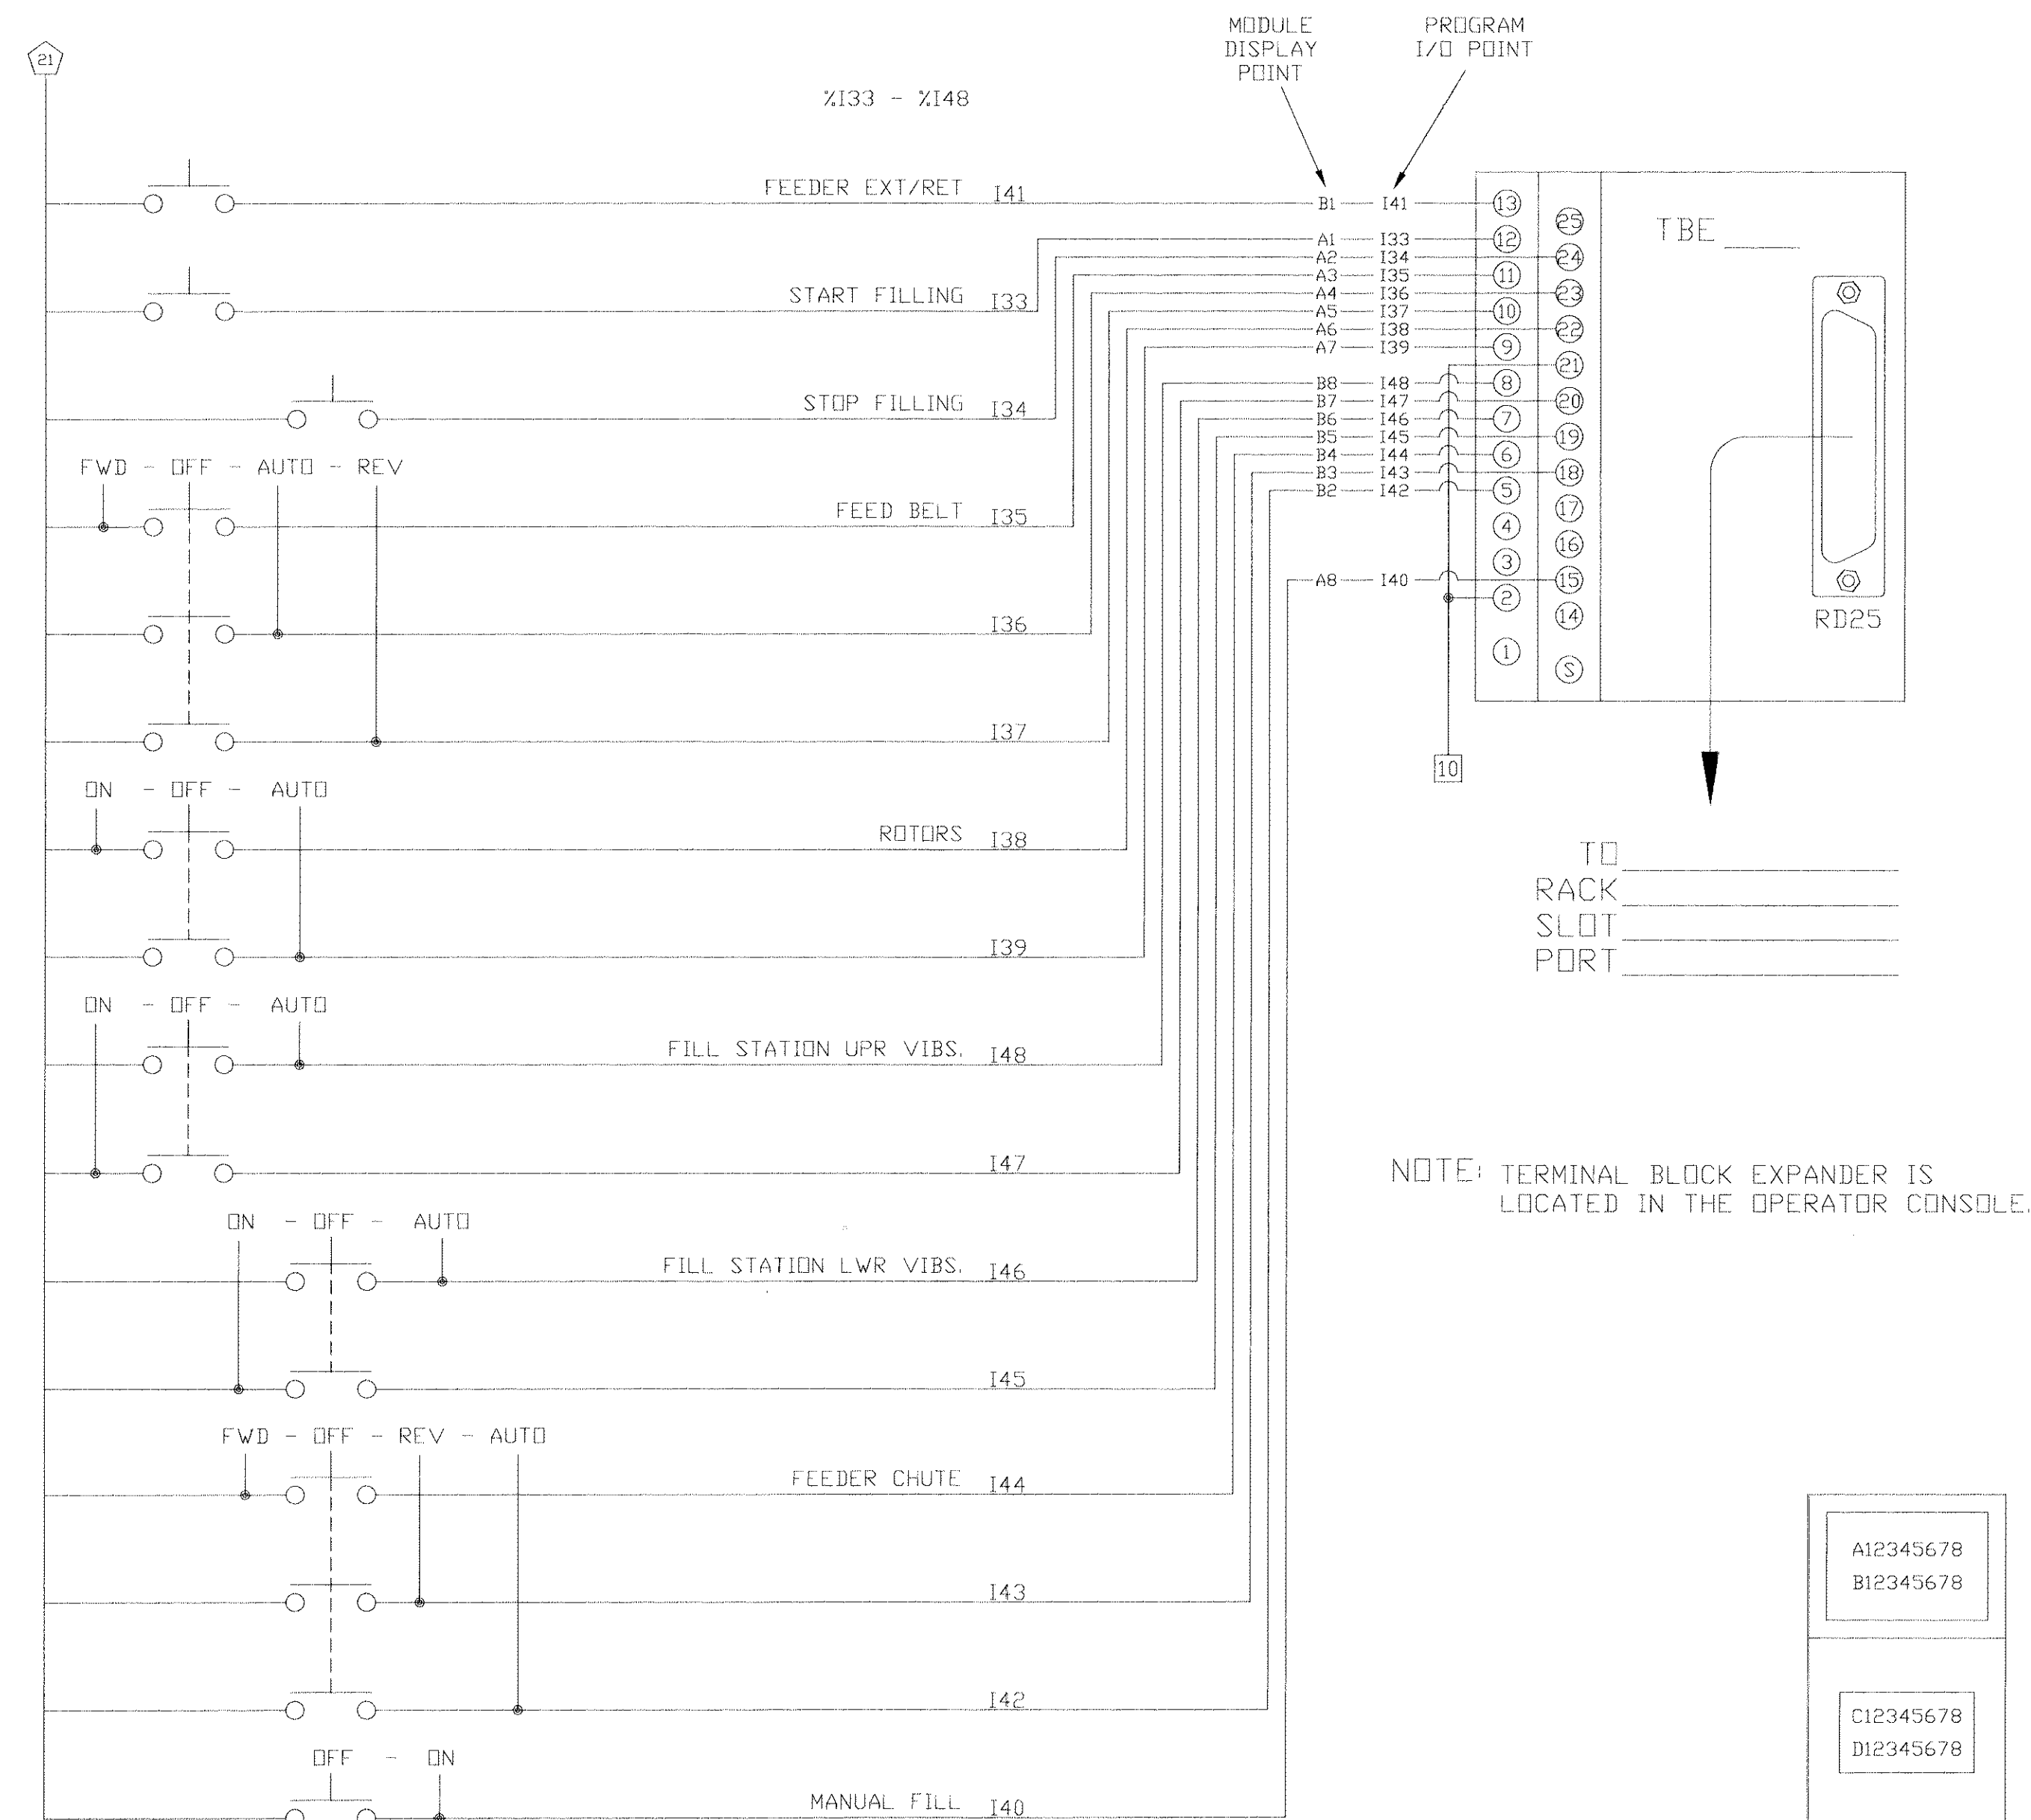

INPUT WIRING VOLTAGE _____

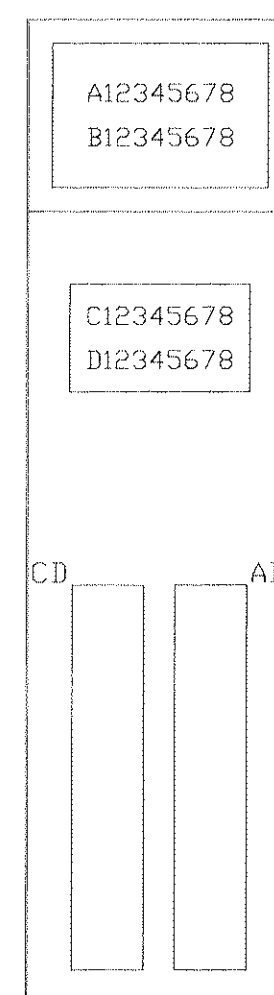



MODULE # _____
RACK _____
SLOT _____

LEGEND

- ⊠ - TERMINAL IN PLC PANEL
- ⊠ - TERMINAL IN MACH. OPERATOR CONSOLE
- ⊠ - TERMINAL IN HYD. PUMP STARTER PANEL
- ⊠ - TERMINAL IN A TURNTABLE PANEL
- ⊠ - TERMINATION POINT AT PLC I/O MODULE
- ⊠ - SWITCH (PUSH BUTTON, SELECTOR, KEY, ETC.)
- ⊠ - PILOT/ALARM LAMP
- ⊠ - RELAY/CONTACTOR
- ⊠ - HYDRAULIC OR PNEUMATIC SOLENOID VALVE
- ⊠ - PROXIMITY SWITCH
- ⊠ - LIMIT SWITCH (MECHANICAL)
- ⊠ - ALARM HORN

COLOR	WIRE COLOR CODE	FUNCTION	VOLTAGE
WHITE	NEUTRAL		120/220VAC
BROWN	PLC INPUT		120/220VAC, 24VDC
ORANGE	PLC OUTPUT		120/220VAC, 24VDC
BLUE	PLC I/O		5-50VDC
BLACK	1 PHASE		220-600VAC
BLACK	3 PHASE		220-600VAC
GREEN	GROUND		GROUND
RED	1 PHASE		120VAC
YELLOW	PANEL TO PANEL		120/220VAC, 24VDC
	(EXTERNALLY POWERED)		

HAWKEYE CONCRETE PRODUCTS CO.						
MEDIAPOLIS, IOWA						
PIPE PRO III INPUT WIRING %I33 TO %I64						
OPERATOR CONSOLE SWITCHES & PB's						
TOLERANCES (UNLESS SPECIFIED)					DISC	
FRACTIONAL ±1/16" DECIMAL			ANGULAR		DRAWING NO.	ISSUE
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	27801D	A
N.T.S.	3/18/93	DEM		26-3		

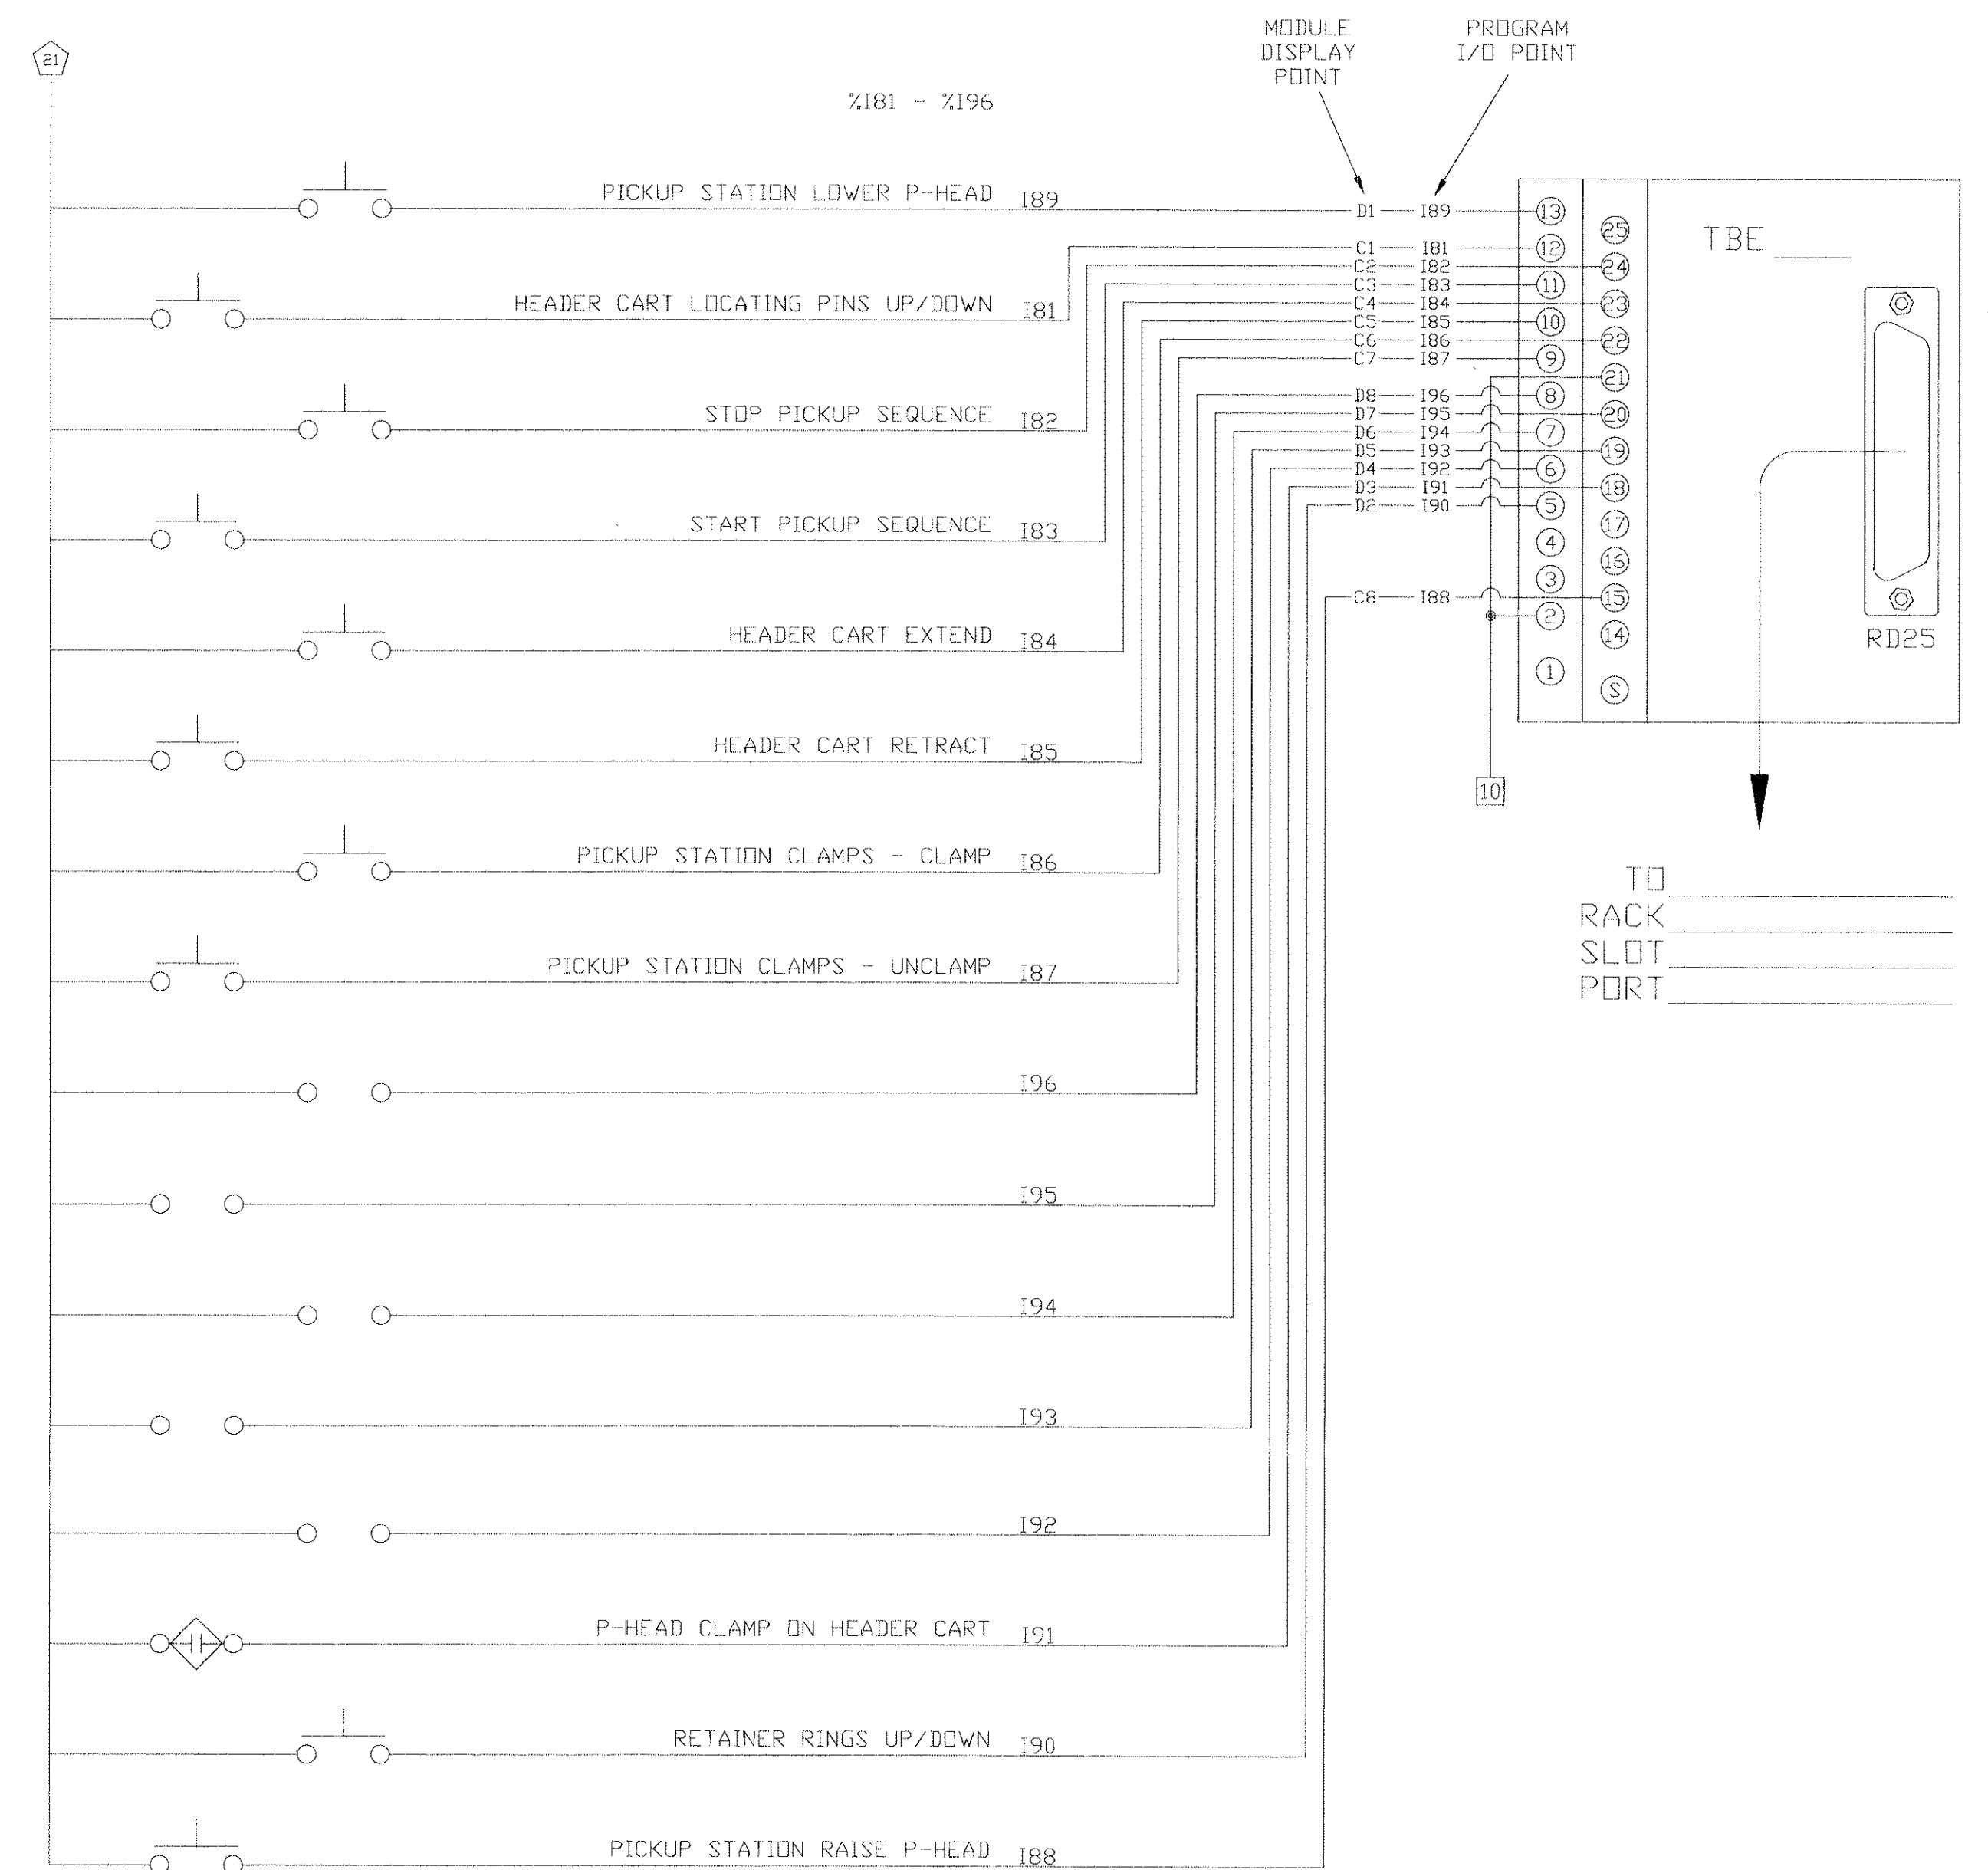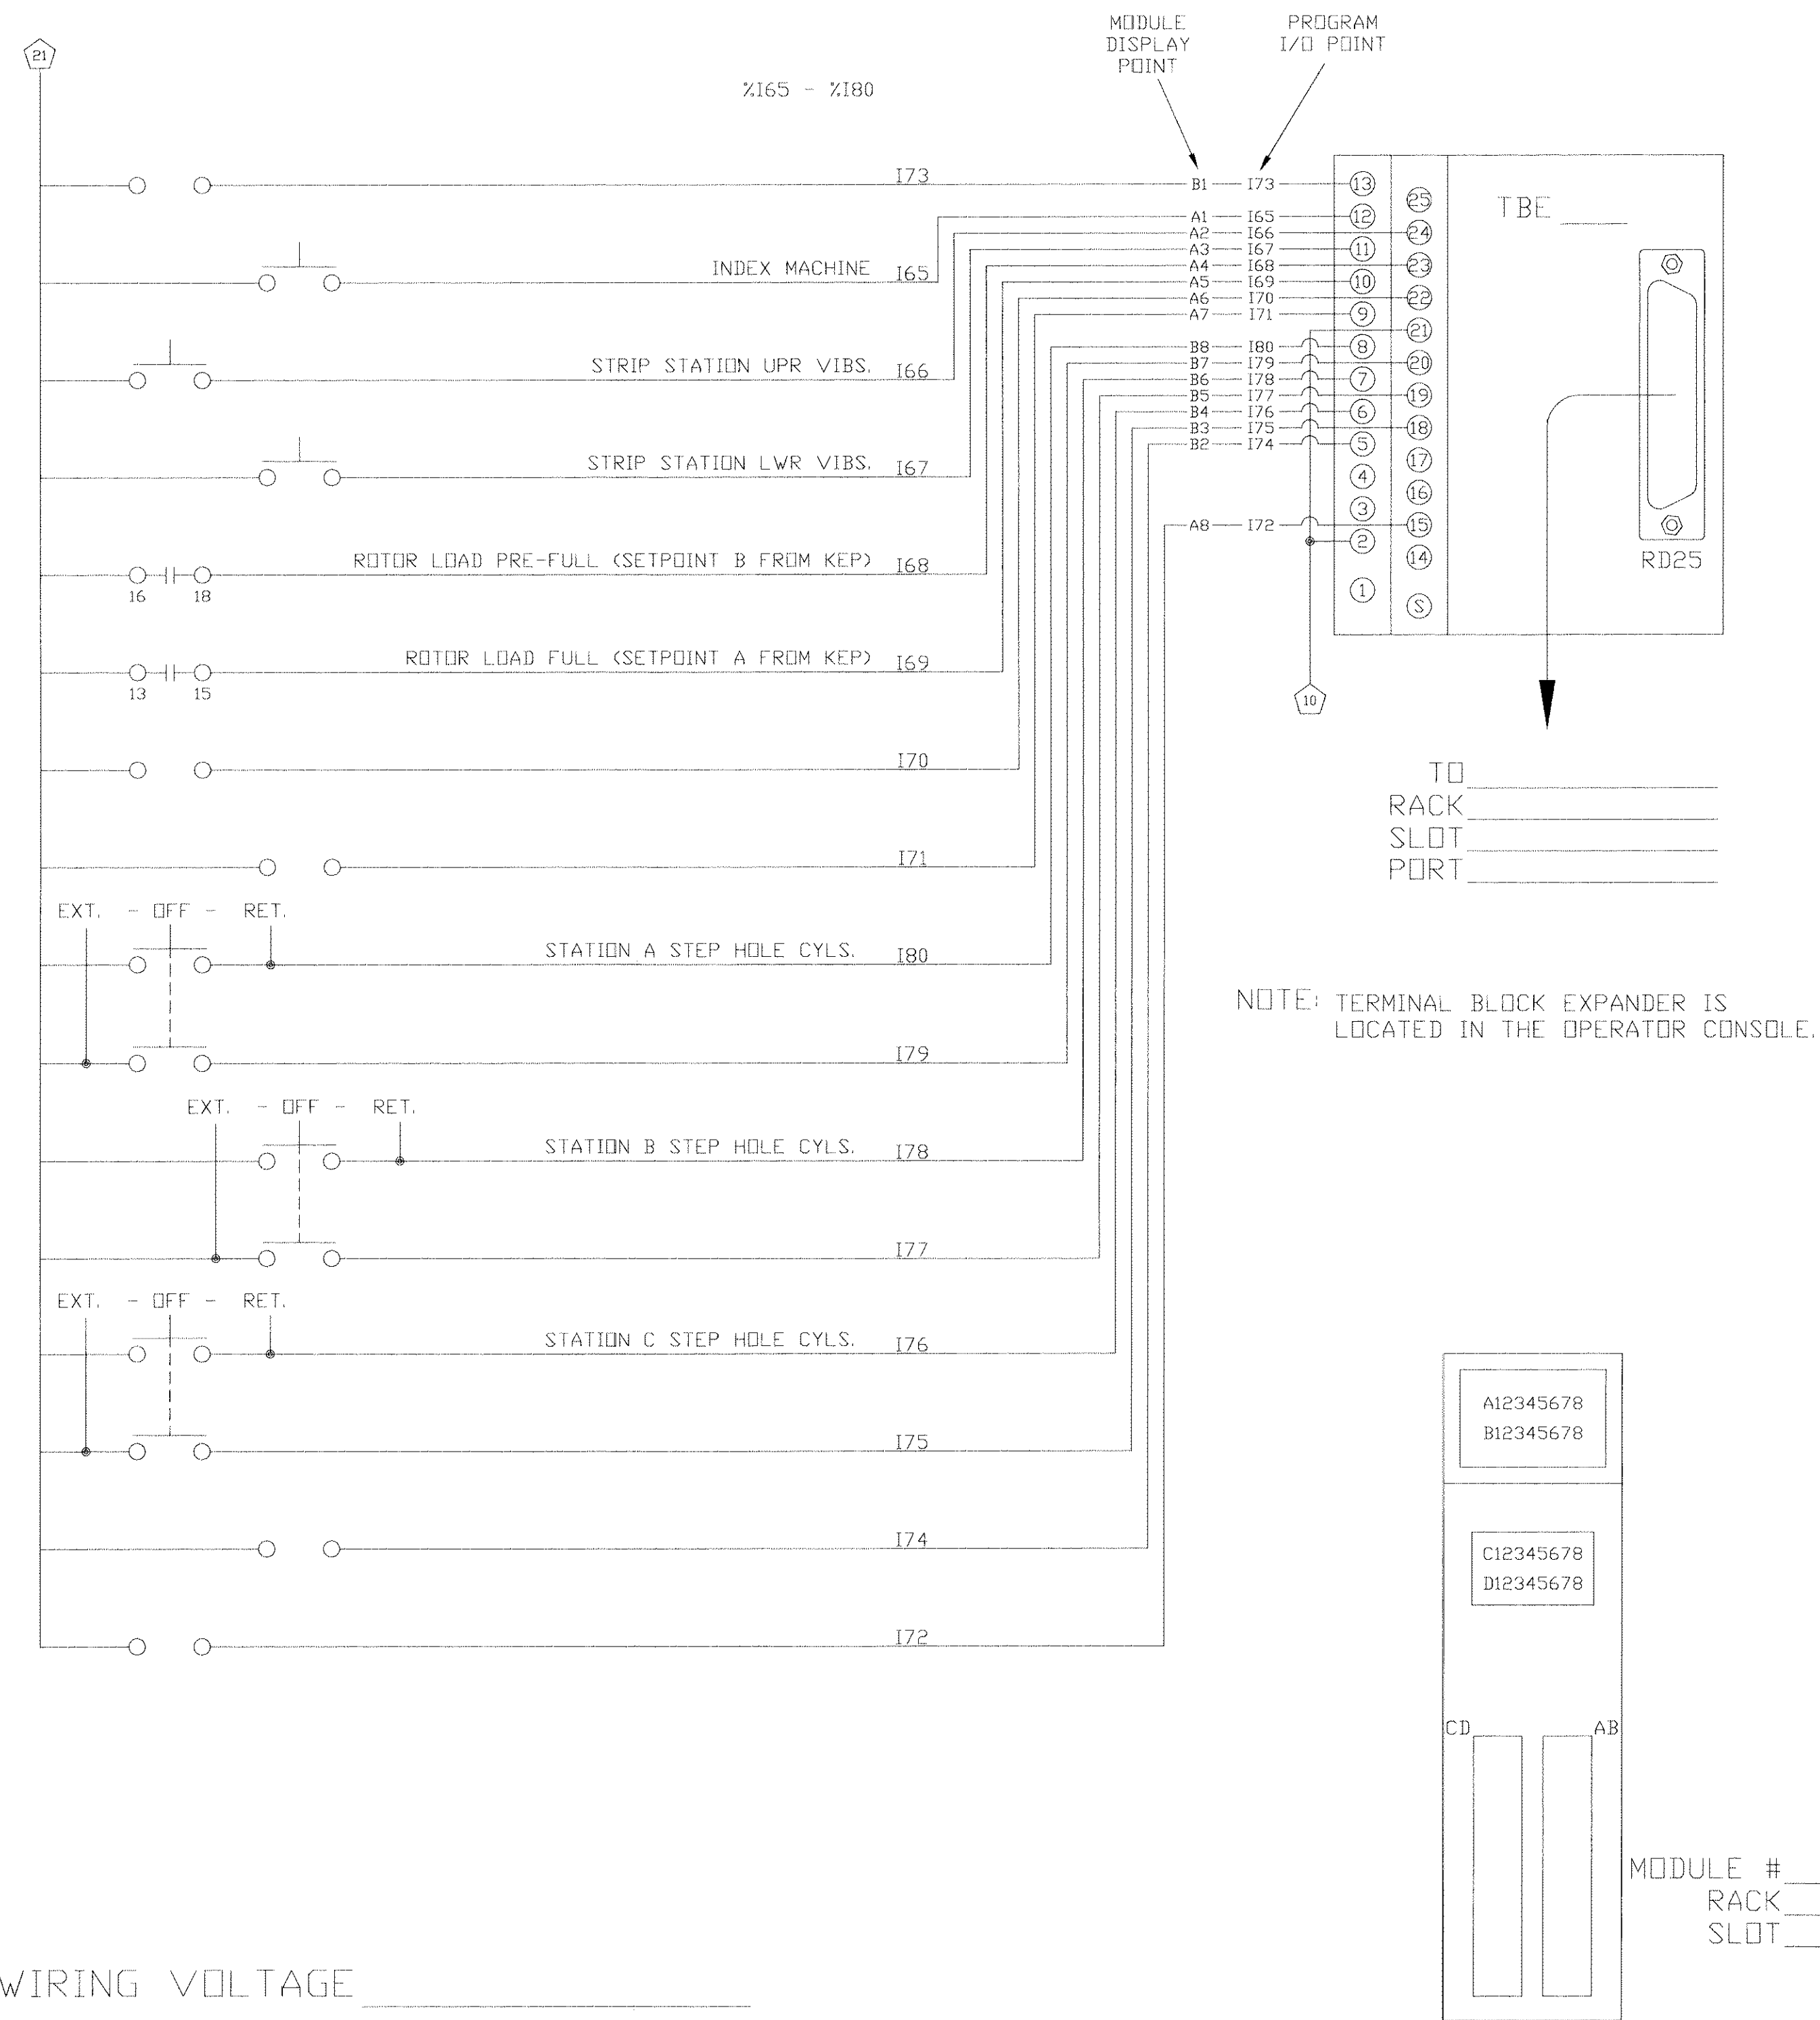

INPUT WIRING VOLTAGE _____

LEGEND


	- TERMINAL IN PLC PANEL		- PILOT/ALARM LAMP
	- TERMINAL IN MACH. OPERATOR CONSOLE		- RELAY/CONTACTOR
	- TERMINAL IN HYD. PUMP STARTER PANEL		- HYDRAULIC OR PNEUMATIC SOLENOID VALVE
	- TERMINAL IN A TURNABLE PANEL		- PROXIMITY SWITCH
	- TERMINATION POINT AT PLC I/O MODULE		- LIMIT SWITCH (MECHANICAL)
	- SWITCH (PUSH BUTTON, SELECTOR, KEY, ETC.)		- ALARM HORN

COLOR	WIRE COLOR CODE	FUNCTION	VOLTAGE
WHITE	NEUTRAL		120/220VAC
BROWN	PLC INPUT		120/220VAC, 24VDC
ORANGE	PLC OUTPUT		120/220VAC, 24VDC
BLUE	PLC I/O		5-50VDC
BLACK	1 PHASE		220-600VAC
BLACK	3 PHASE		220-600VAC
GREEN	GROUND		GROUND
RED	1 PHASE		120VAC
YELLOW	PANEL TO PANEL		120/220VAC, 24VDC
	(EXTERNALLY POWERED)		

HAWKEYE CONCRETE PRODUCTS CO.
MEDIAPOLIS, IDWA

PIPE PRO III INPUT WIRING %165 TO %196
OPERATOR PUSHBUTTONS & FIELD DEVICES


TOLERANCES (UNLESS SPECIFIED)					DISC	
FRACTIONAL	DATE	DRAWN	APPR. BY	FILE NO.	DRAWING NO.	ISSUE
N.T.S.	3/18/93	DEM		26-3	27802D	A

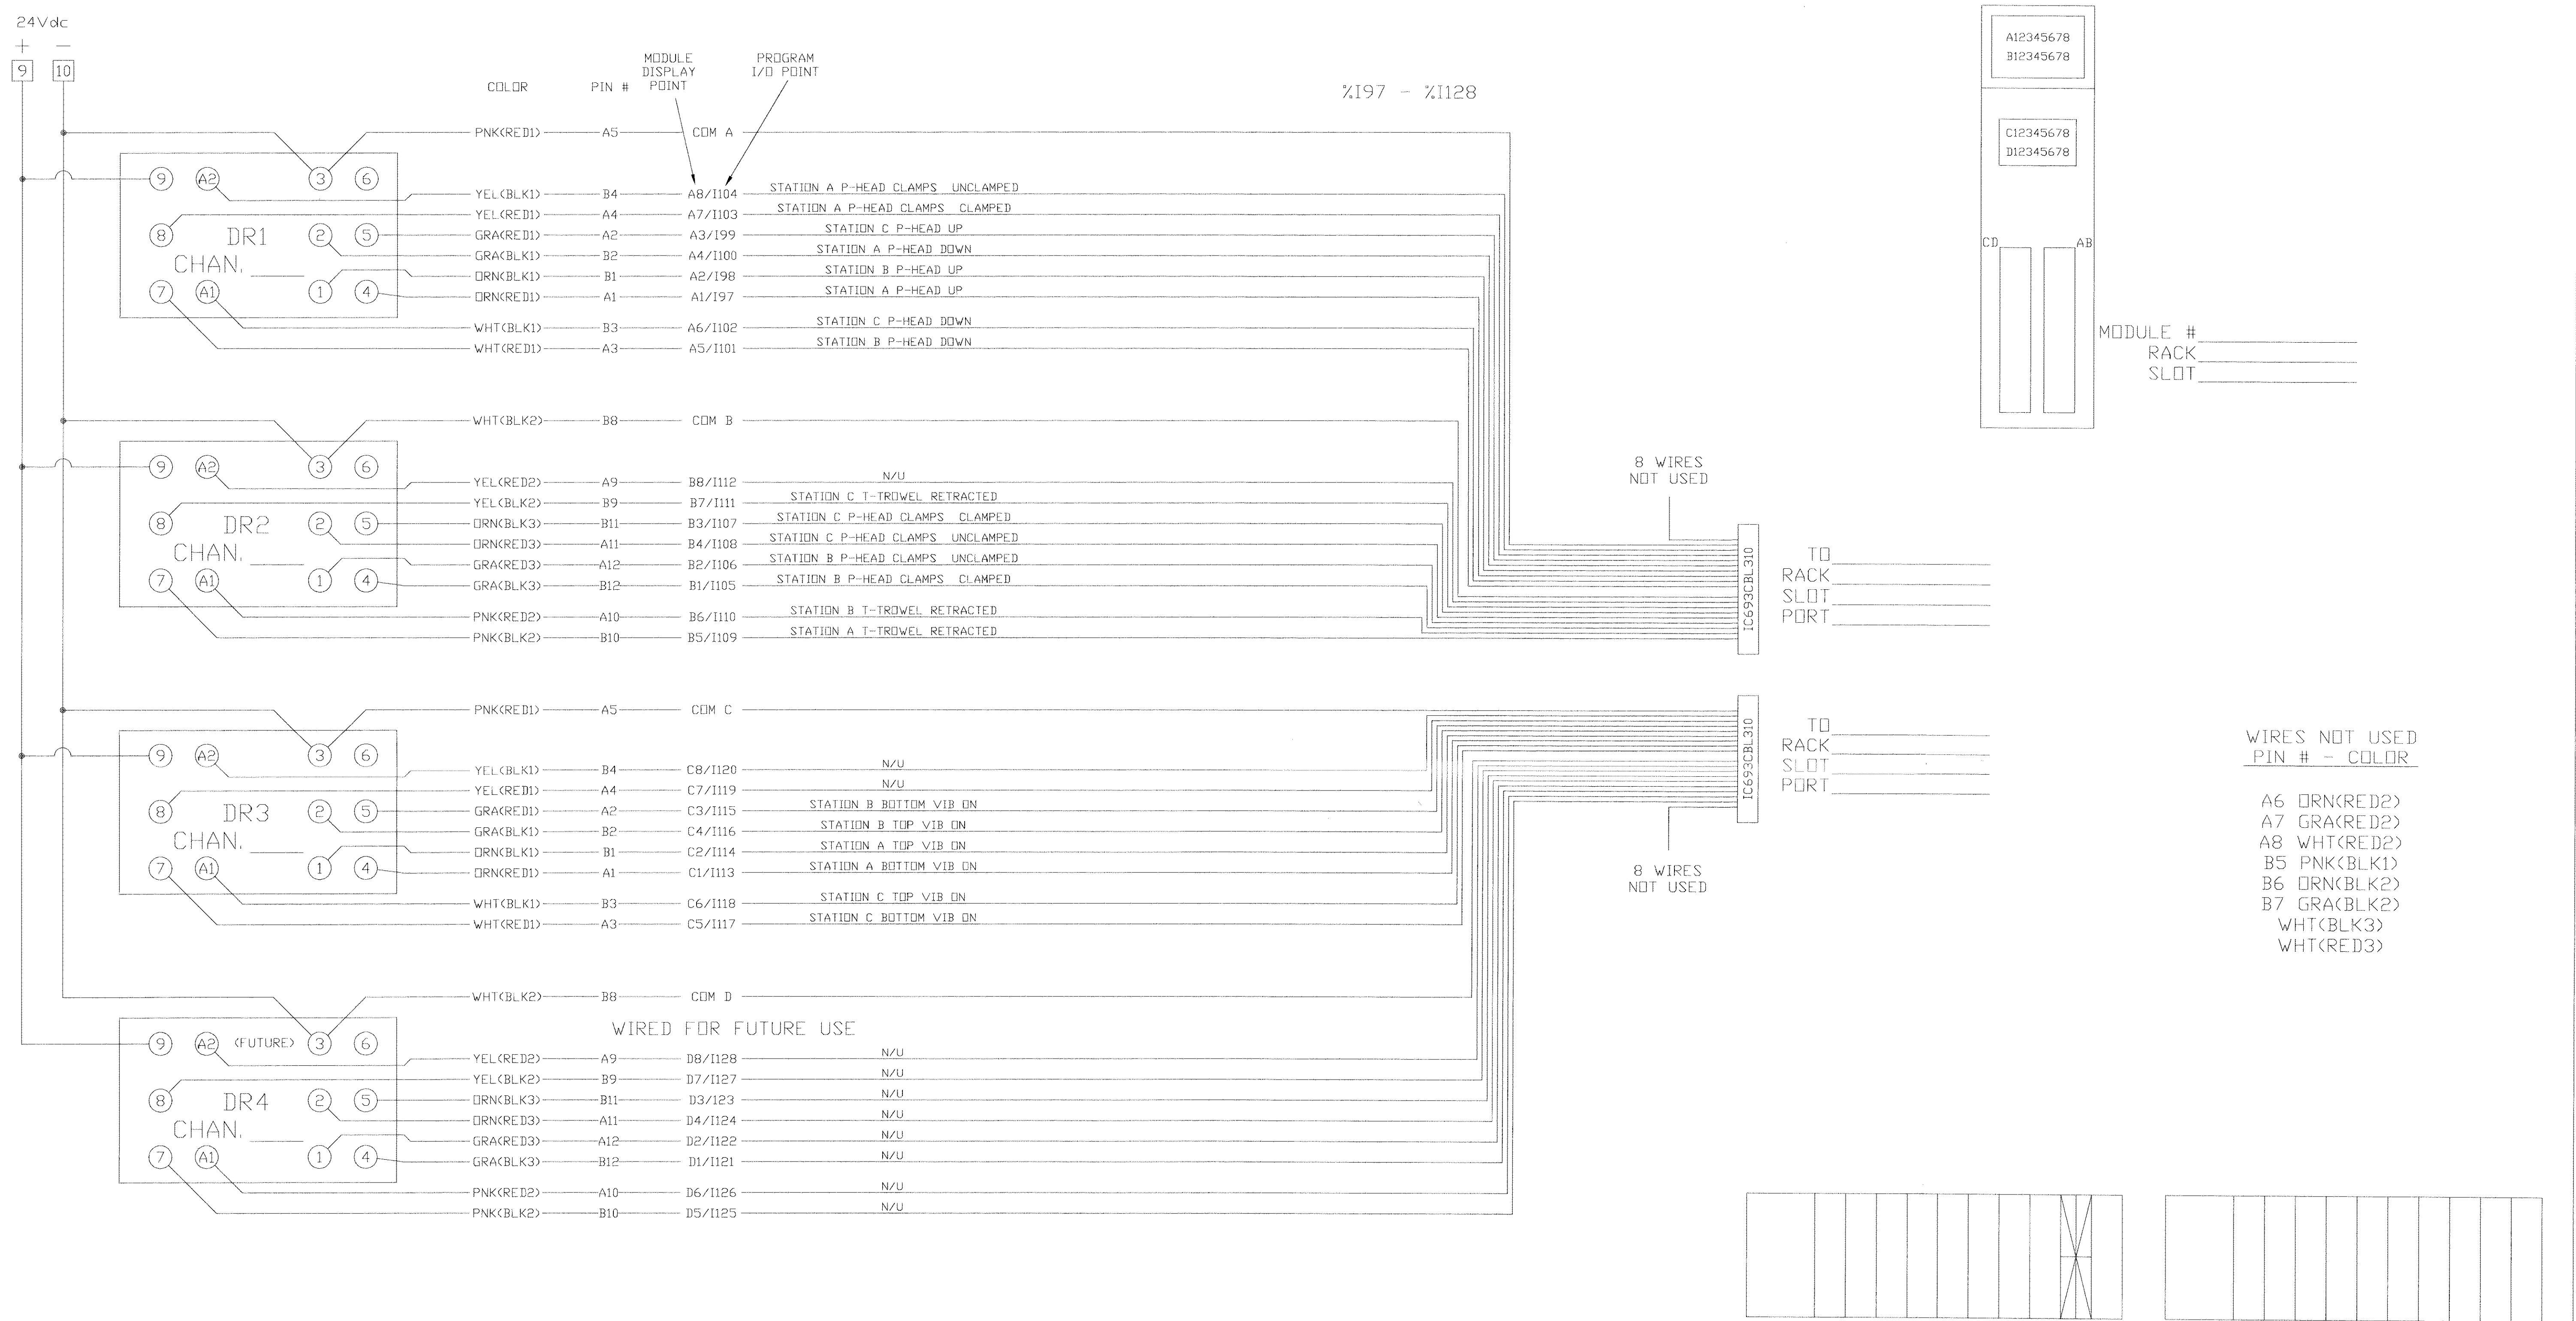

LEGEND




	- TERMINAL IN PLC PANEL		- PILOT/ALARM LAMP
	- TERMINAL IN MACH. OPERATOR CONSOLE		- RELAY/CONTACTOR
	- TERMINAL IN HYD. PUMP STARTER PANEL		- HYDRAULIC OR PNEUMATIC SOLENOID VALVE
	- TERMINAL IN A TURNTABLE PANEL		- PROXIMITY SWITCH
	- TERMINATION POINT AT PLC I/O MODULE		- LIMIT SWITCH (MECHANICAL)
	- SWITCH (PUSH BUTTON, SELECTOR, KEY, ETC.)		- ALARM HORN

WIRE COLOR CODE		
COLOR	FUNCTION	VOLTAGE
WHITE	NEUTRAL	120/220VAC
BROWN	PLC INPUT	120/220VAC, 24VDC
ORANGE	PLC OUTPUT	120/220VAC, 24VDC
BLUE	PLC I/O	5-50VDC
BLACK	1 PHASE	220-600VAC
BLACK	3 PHASE	220-600VAC
GREEN	GROUND	GROUND
RED	1 PHASE	120VAC
YELLOW	PANEL TO PANEL (EXTERNALLY POWERED)	120/220VAC, 24VDC

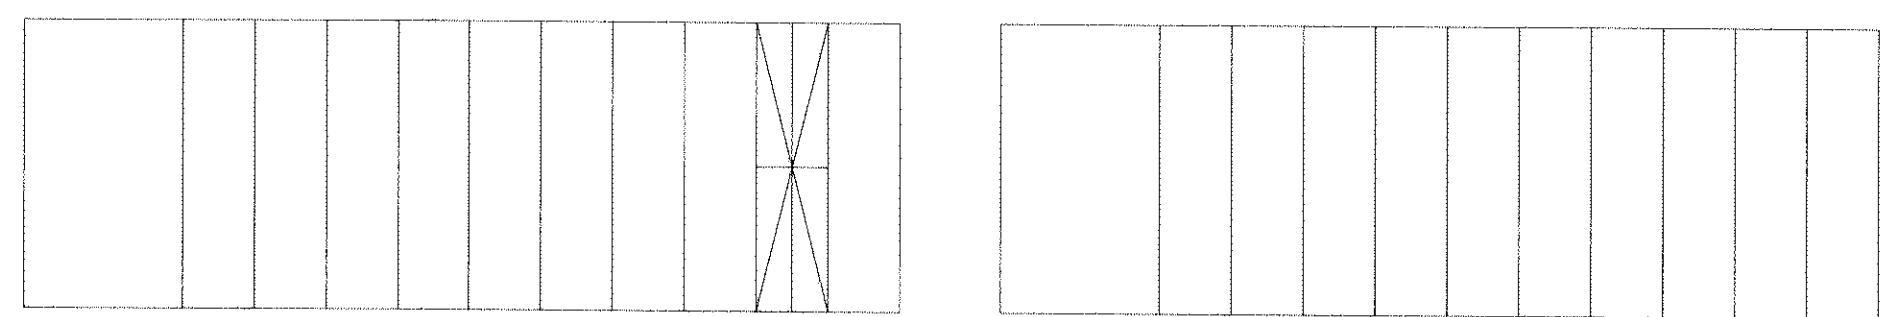

HAWKEYE CONCRETE PRODUCTS CO. MEDIAPOLIS, IOWA						
PIPE PRO III DUPLINE RECEIVER DIAGRAM (DUPLINE DEVICES IN PLC PANEL) %I97 TO %I128						
TOLERANCES (UNLESS SPECIFIED)					DISC	
FRACTIONAL 1/16" DECIMAL			ANGULAR			
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	DRAWING NO.	ISSUE
N.T.S.	3/18/93	DEM		26-3	27803D	A

MANUAL SWITCH
DIAGRAM

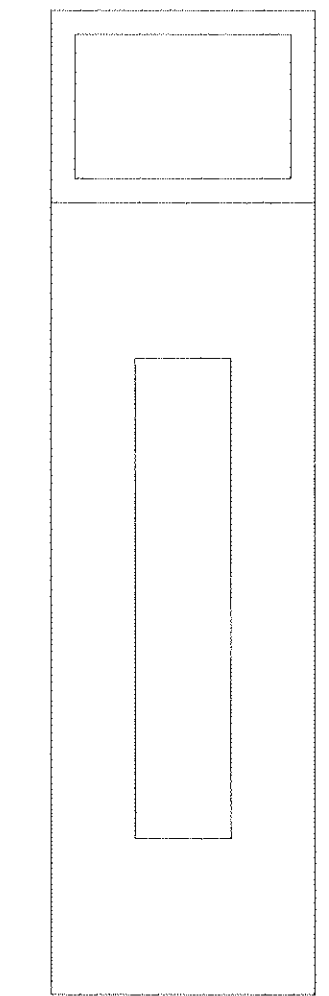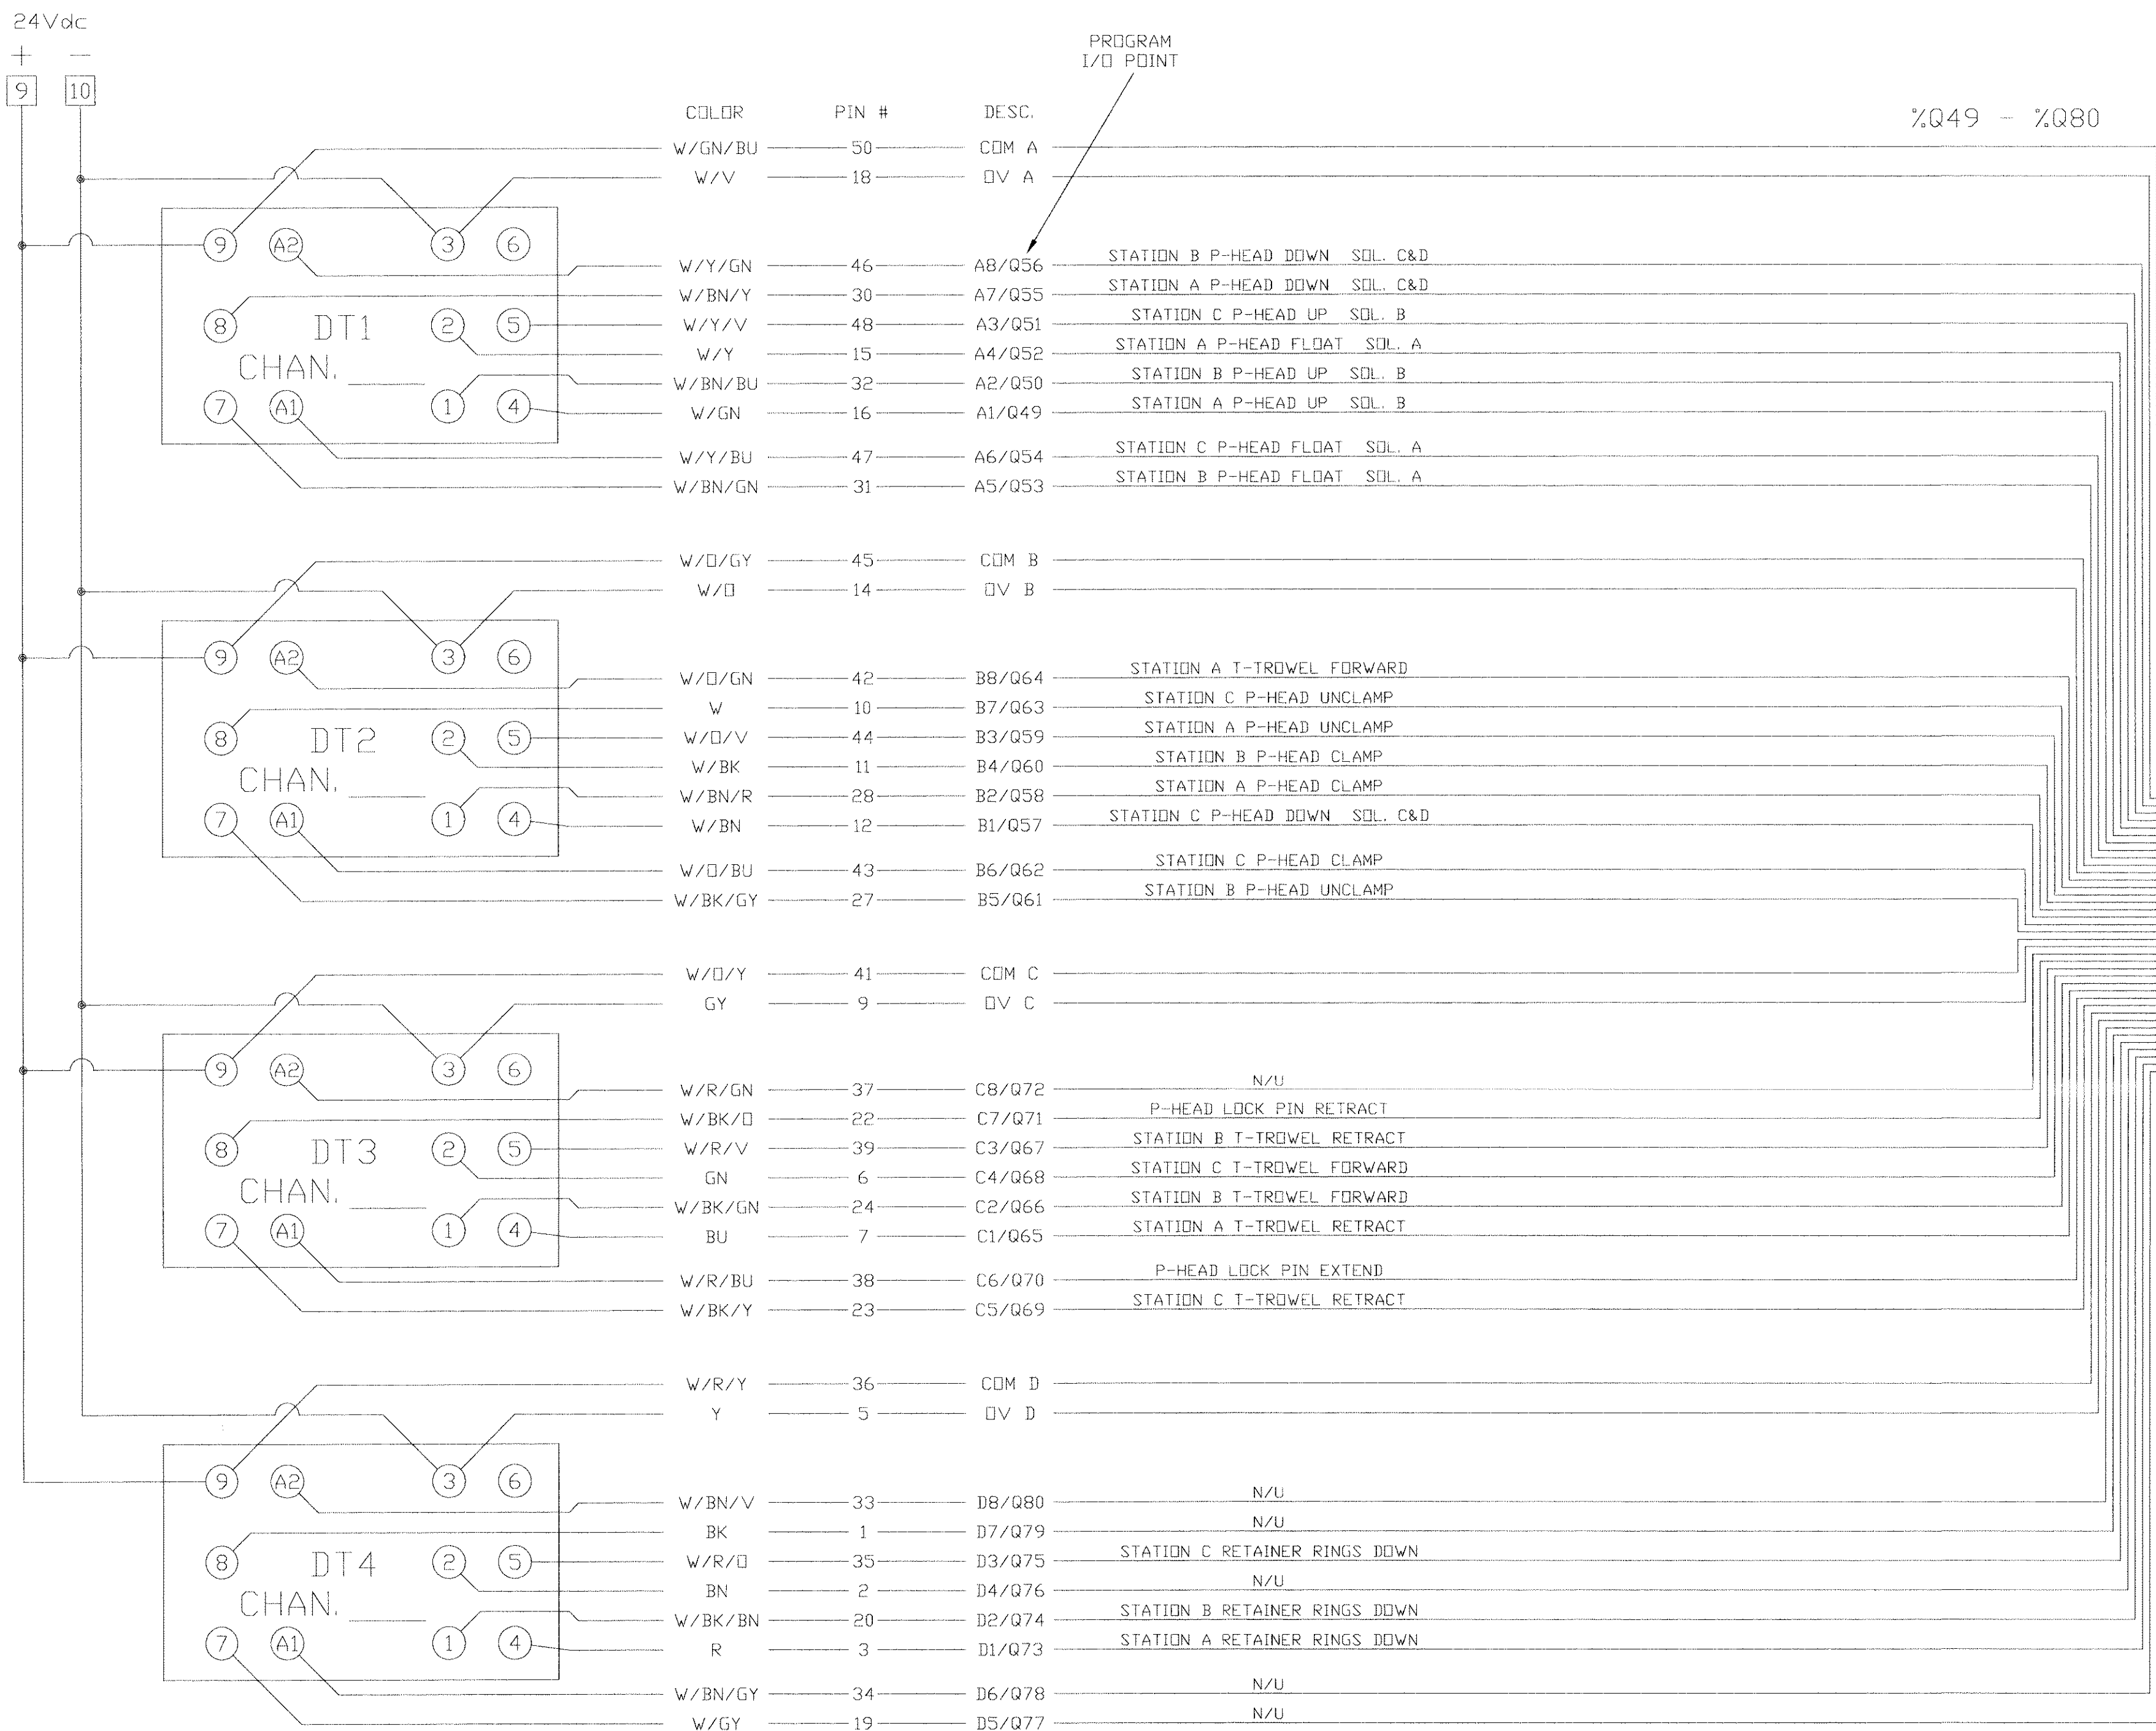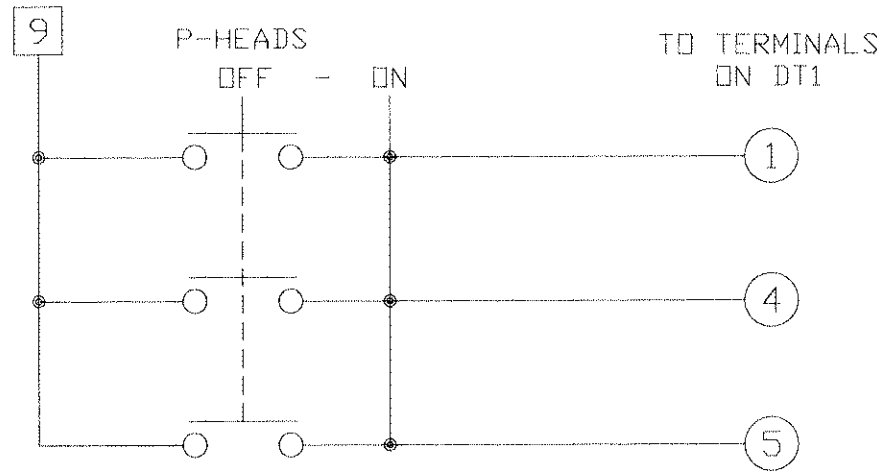

1C693CBL308

CONNECT TO OUTPUT
MODULE 1C693MDL751
32PT 24Vdc PNP OUTPUT


10 WIRES
NOT USED

WIRES NOT USED
PIN # - COLOR



- 4 □
- 8 V
- 13 W/R
- 17 W/BU
- 25 W/BK/BU
- 26 W/BK/V
- 49 W/Y/GY
- 29 W/BN/O
- 40 W/R/GY
- 21 W/BK/R

LEGEND

NOTE: ALL LOW VOLTAGE WIRING SHOWN
ABOVE SHALL BE 18AWG MTW BLUE

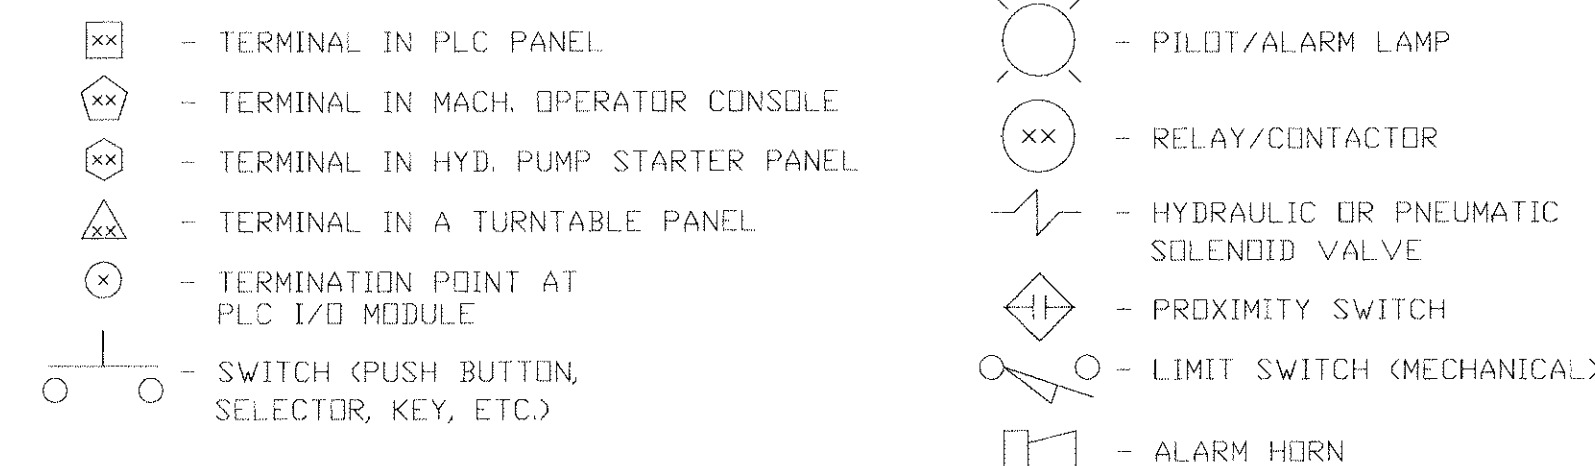


WIRE COLOR CODE		
COLOR	FUNCTION	VOLTAGE
WHITE	NEUTRAL	120/220VAC
BROWN	PLC INPUT	120/220VAC, 24VDC
ORANGE	PLC OUTPUT	120/220VAC, 24VDC
BLUE	PLC I/O	5-50VDC
BLACK	1 PHASE	220-600VAC
BLACK	3 PHASE	220-600VAC
GREEN	GROUND	GROUND
RED	1 PHASE	120VAC
YELLOW	PANEL TO PANEL (EXTERNALLY POWERED)	120/220VAC, 24VDC

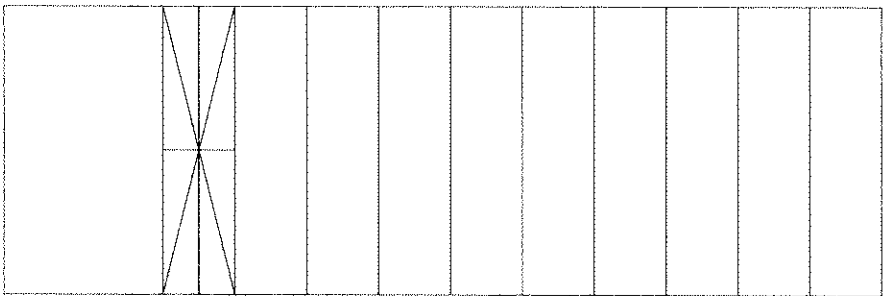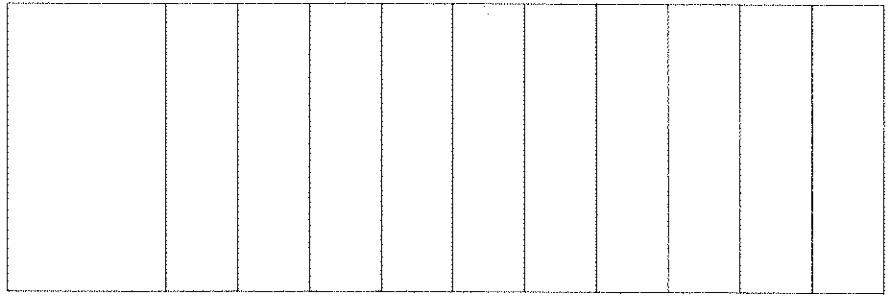

HAWKEYE CONCRETE PRODUCTS CO.						
MEDIAPOLIS, IDWA						
PIPE PRO III DUPLINE TRANSMITER DIAGRAM						
(DUPLINE DEVICES IN PLC PANEL) %Q49 - %Q80						
TOLERANCES (UNLESS SPECIFIED)						
FRACTIONAL #1/16" DECIMAL			ANGULAR		DISC	
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	DRAWING NO.	ISSUE
N.T.S.	5/4/93	DEM		26-3	27806D	B

MODULE # _____
RACK _____
SLOT _____

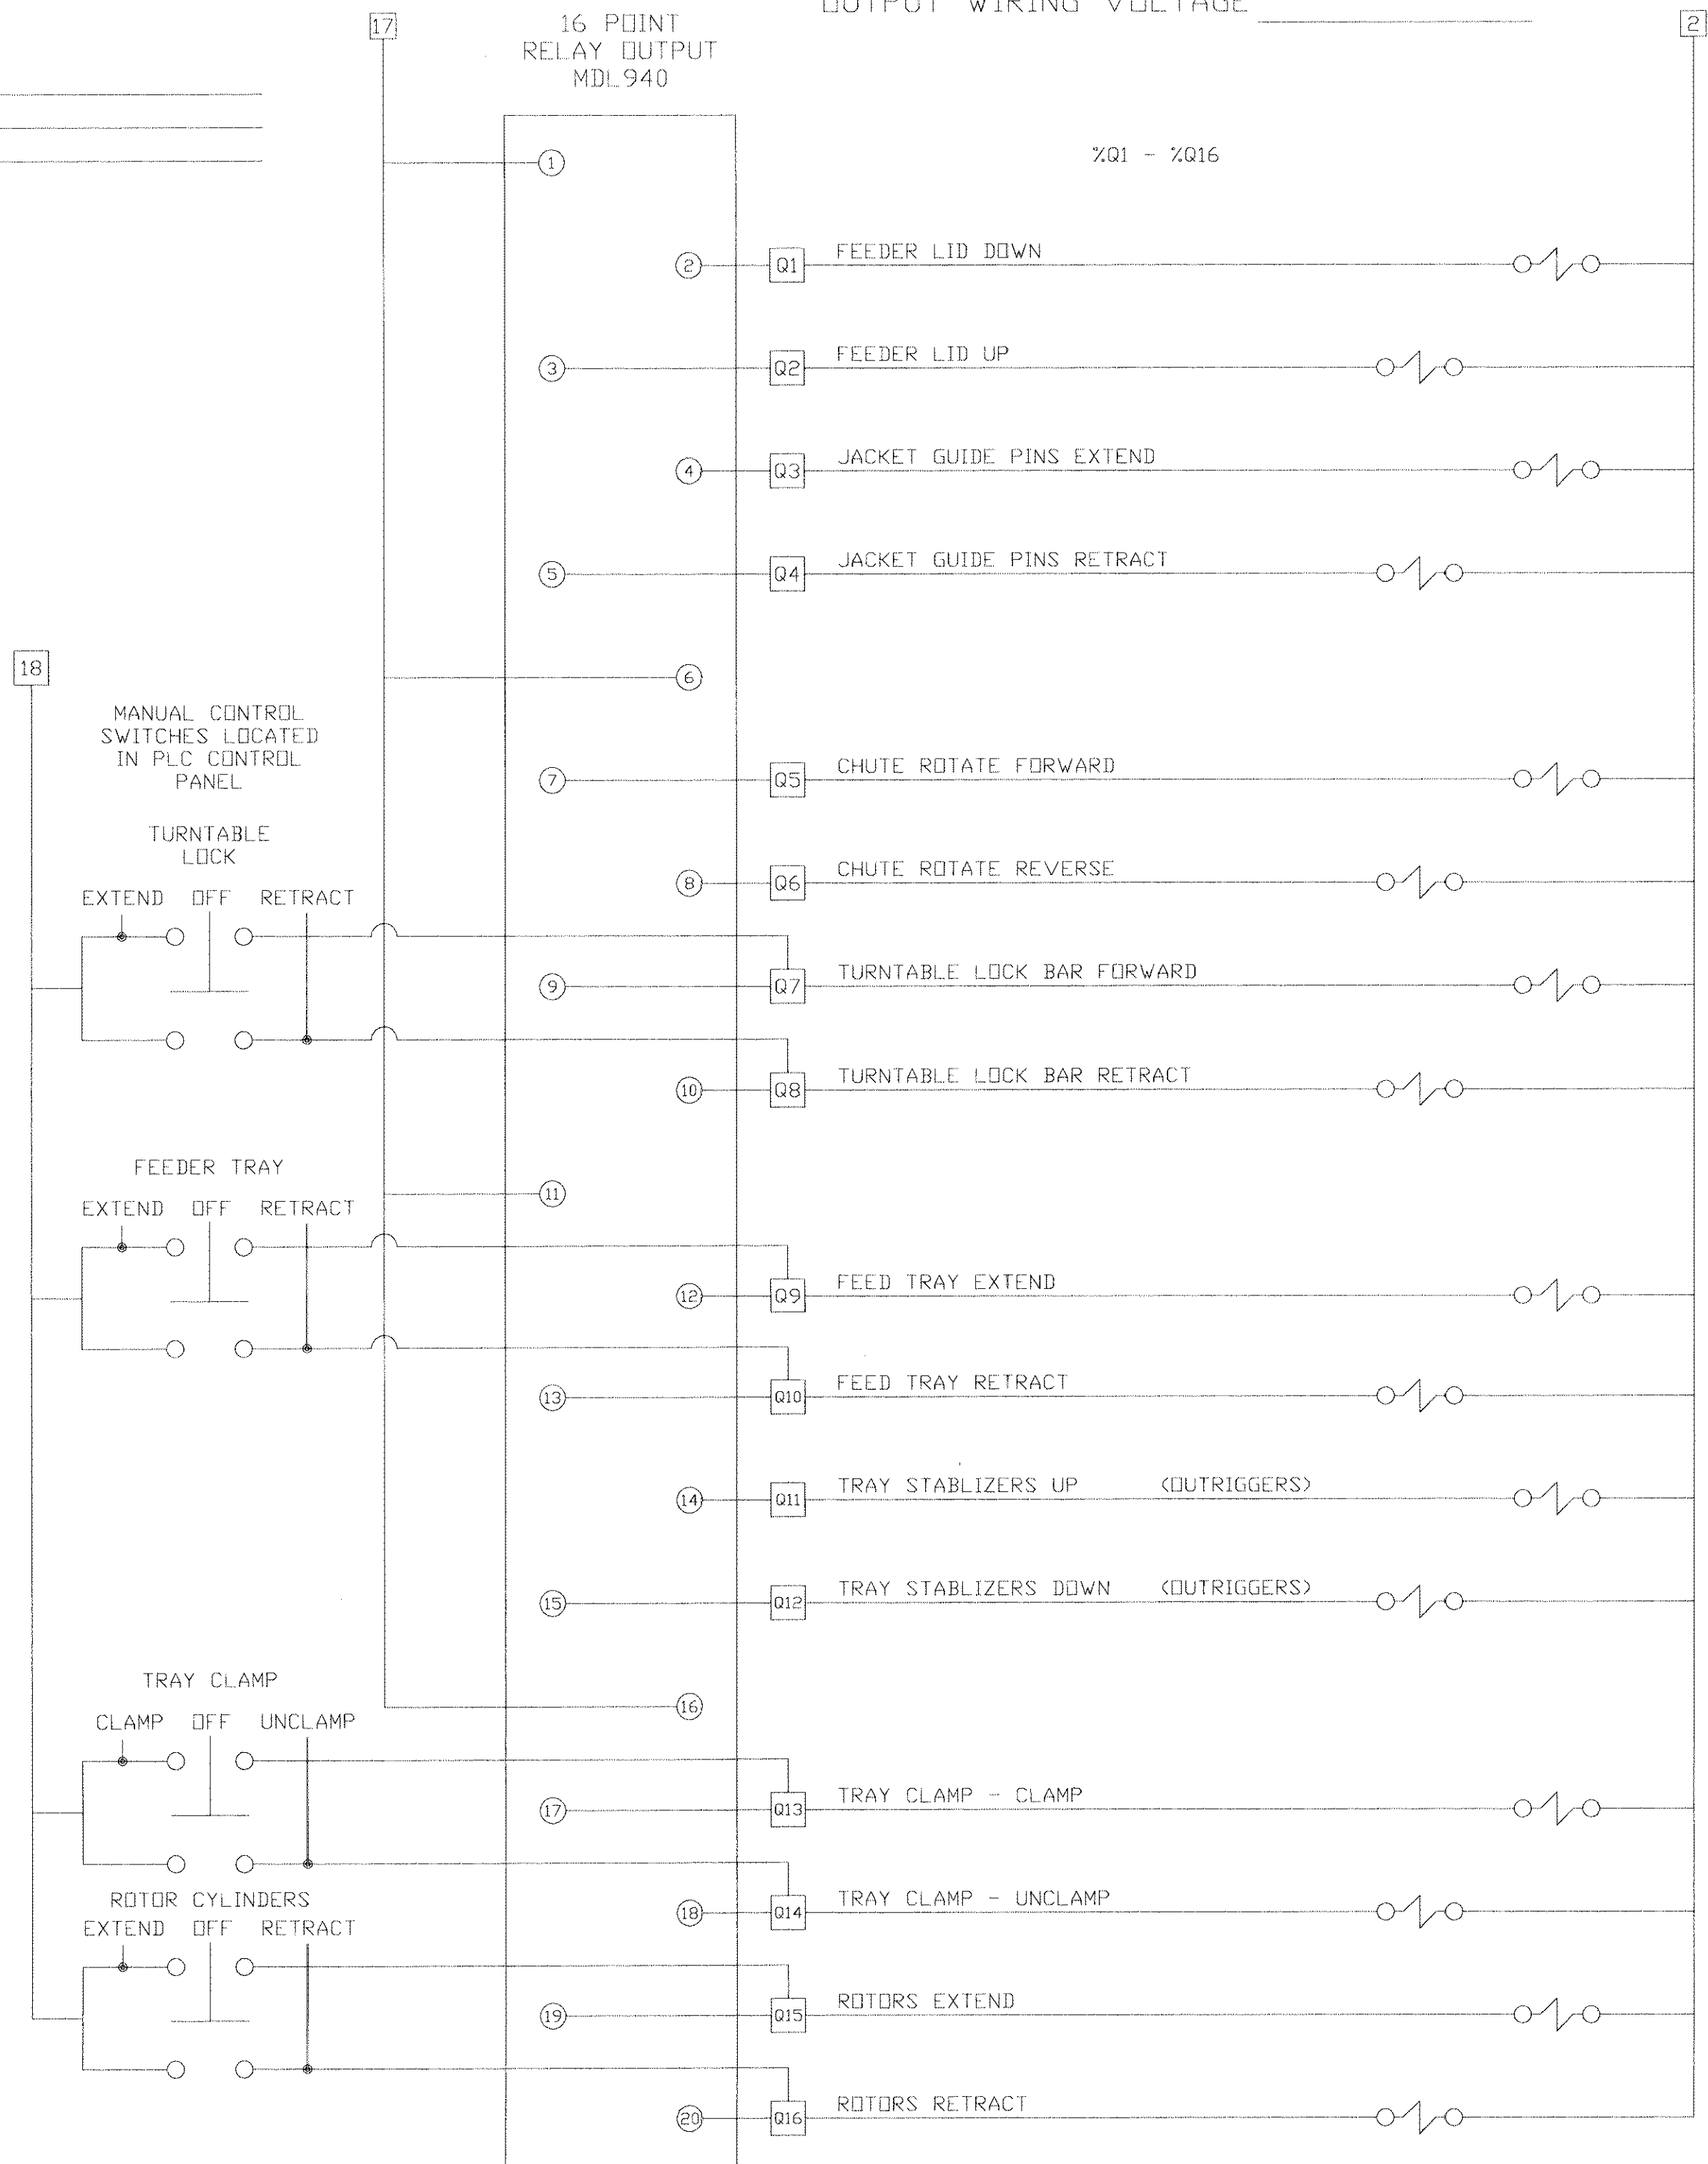


LEGEND

- xx - TERMINAL IN PLC PANEL
- xx - TERMINAL IN MACH. OPERATOR CONSOLE
- xx - TERMINAL IN HYD. PUMP STARTER PANEL
- △ - TERMINAL IN A TURNTABLE PANEL
- ⊗ - TERMINATION POINT AT PLC I/O MODULE
- - SWITCH (PUSH BUTTON, SELECTOR, KEY, ETC.)
- ⊗ - PILOT/ALARM LAMP
- xx - RELAY/CONTACTOR
- ⚡ - HYDRAULIC OR PNEUMATIC SOLENOID VALVE
- ◇ - PROXIMITY SWITCH
- - LIMIT SWITCH (MECHANICAL)
- ⊲ - ALARM HORN

NOTE: ALL WIRING FROM TERMINAL BLOCKS TO PLC MODULES SHALL BE 16AWG MTW, ALL OTHER WIRING SHOWN SHALL BE 14AWG MTW UNLESS OTHERWISE NOTED.

THE COLOR CODE AT RIGHT SHALL BE USED FOR ALL WIRING.

MODULE # _____
RACK _____
SLOT _____

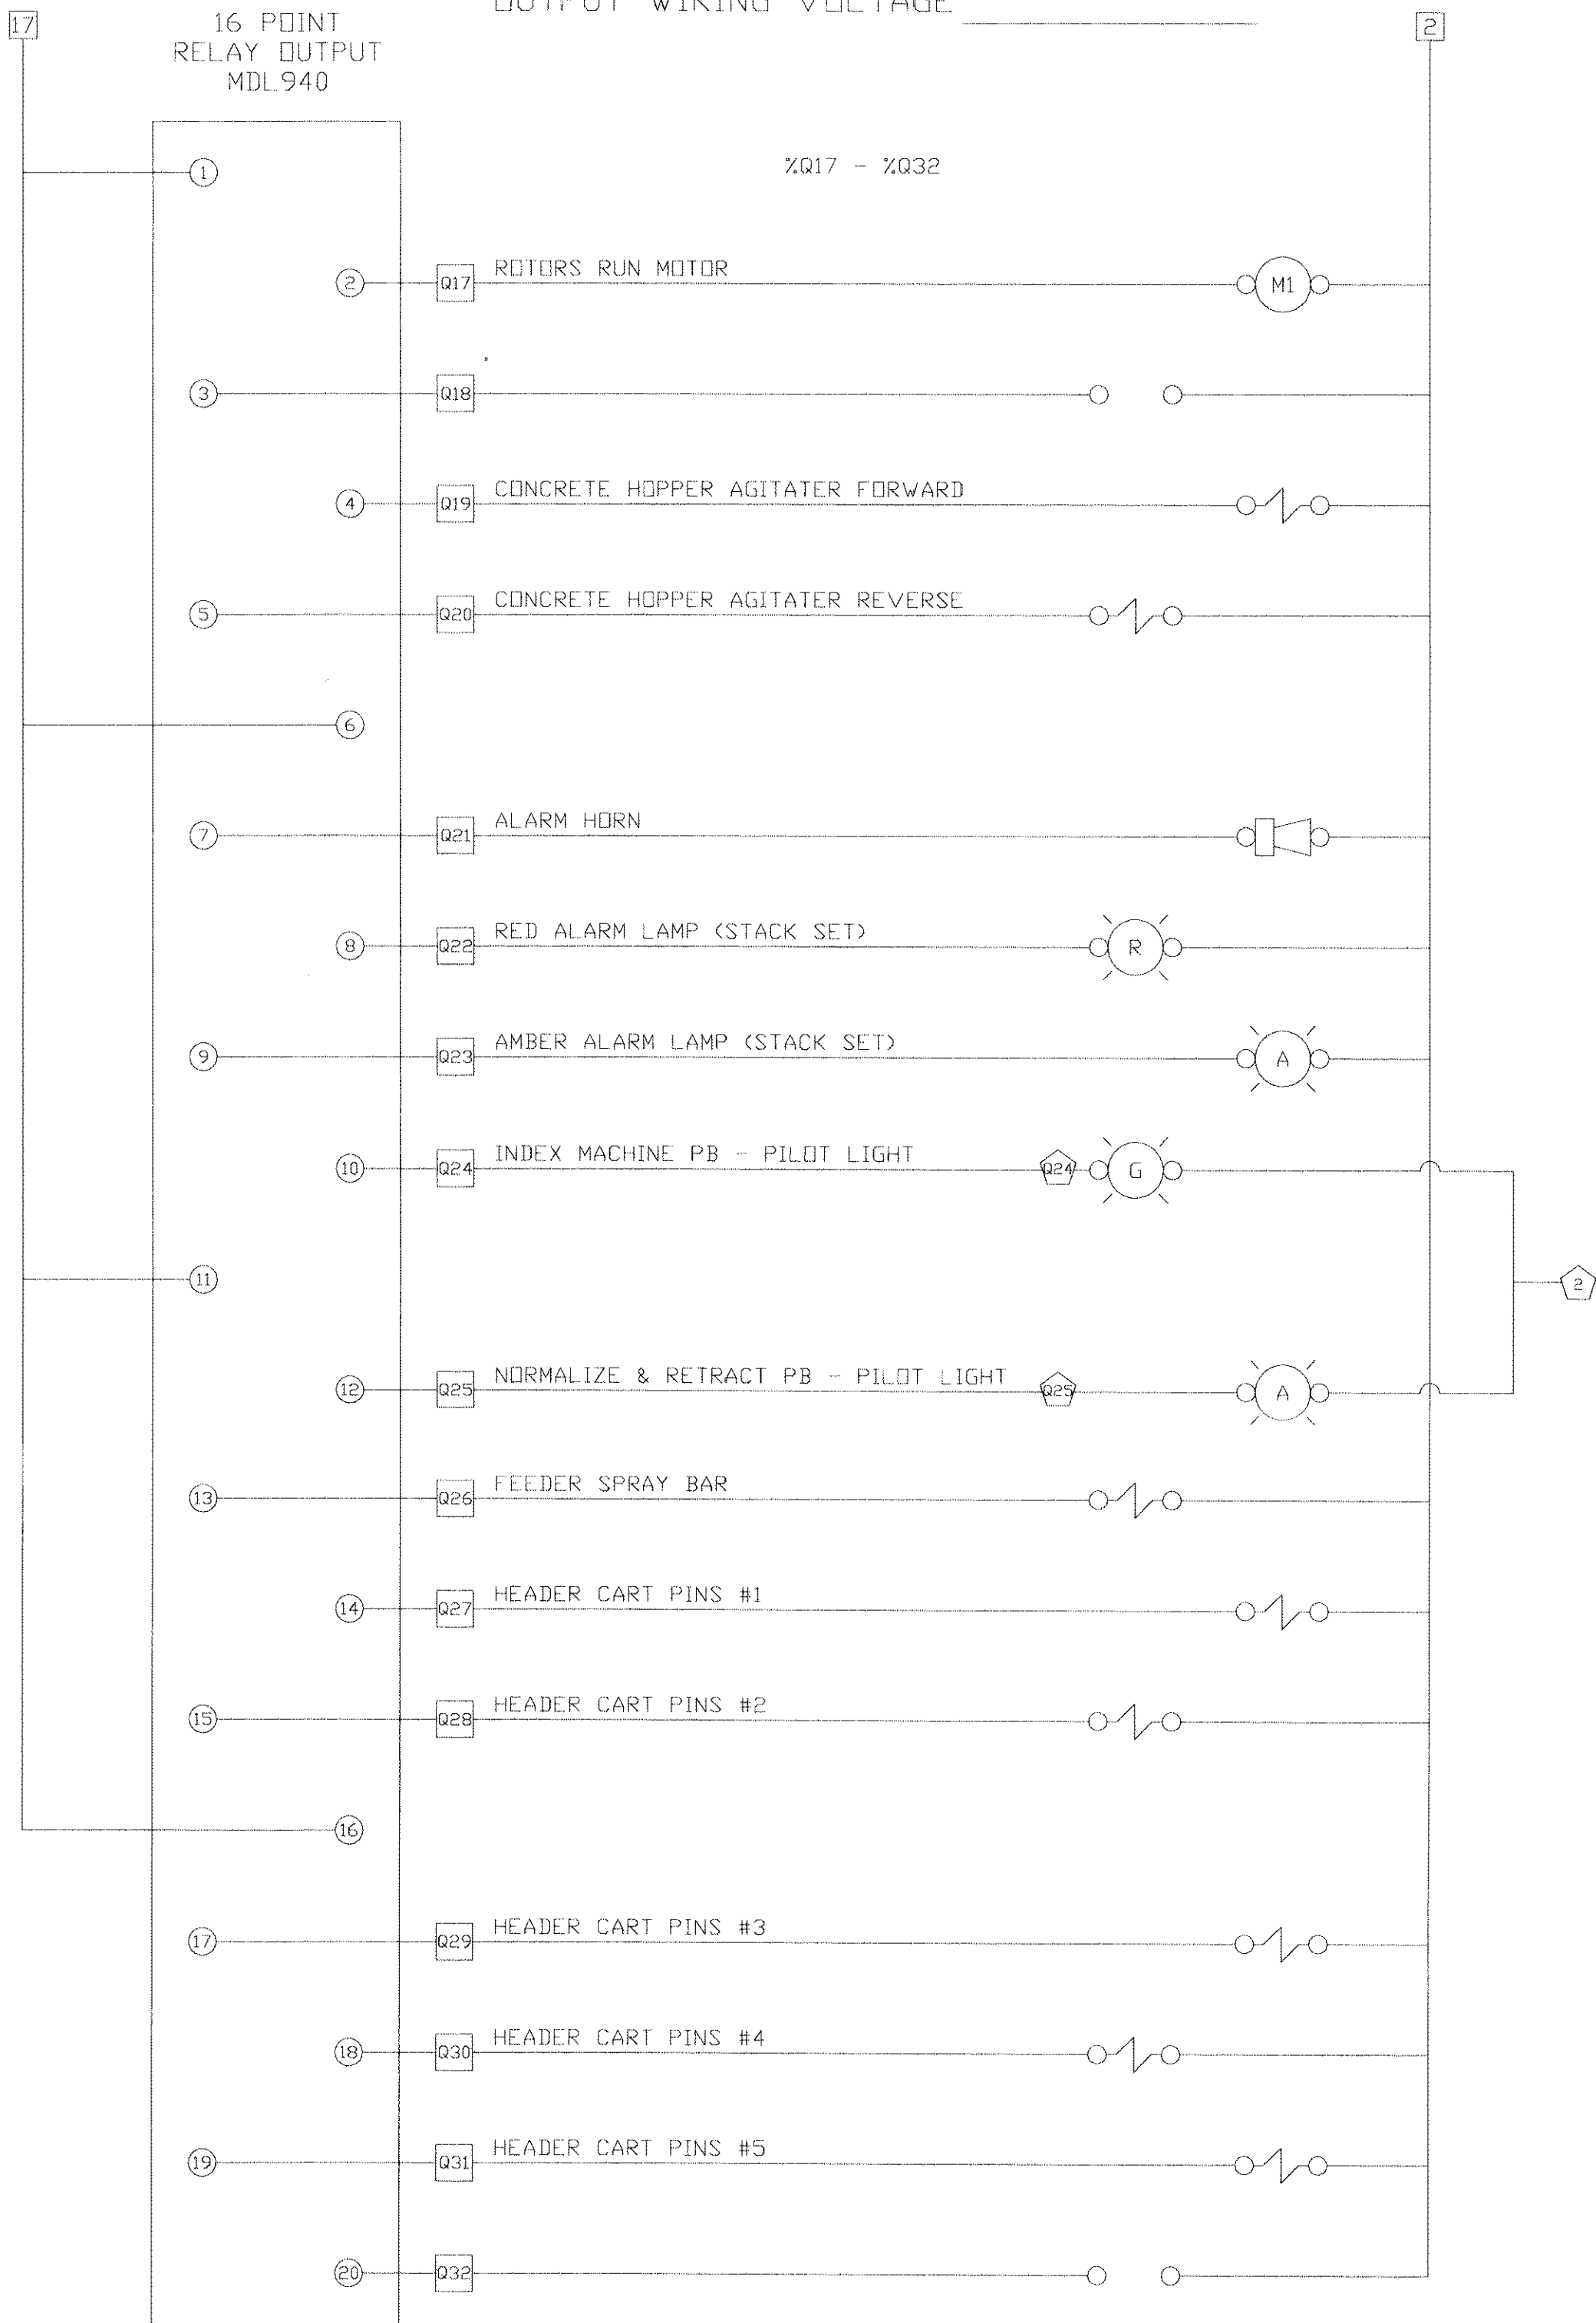

HEADER CART PIN USAGE EXPLANATION


PIN 1 - _____
PIN 2 - _____
PIN 3 - _____
PIN 4 - _____
PIN 5 - _____

COLOR	WIRE COLOR CODE	FUNCTION	VOLTAGE
WHITE	NEUTRAL	120/220VAC	
BROWN	PLC INPUT	120/220VAC, 24VDC	
ORANGE	PLC OUTPUT	120/220VAC, 24VDC	
BLUE	PLC I/O	5-50VDC	
BLACK	1 PHASE	220-600VAC	
BLACK	3 PHASE	220-600VAC	
GREEN	GROUND	GROUND	
RED	1 PHASE	120VAC	
YELLOW	PANEL TO PANEL	120/220VAC, 24VDC	
	(EXTERNALLY POWERED)		

HAWKEYE CONCRETE PRODUCTS CO.
MEDIAPOLIS, IDWA

PIPE PRO III OUTPUT WIRING Q1 TO Q32

TOLERANCES (UNLESS SPECIFIED)					DISC	
FRACTIONAL ±1/16" DECIMAL					ANGULAR	
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	DRAWING NO.	ISSUE
N.T.S.	3/18/93	DEM		26-3	27804D	A

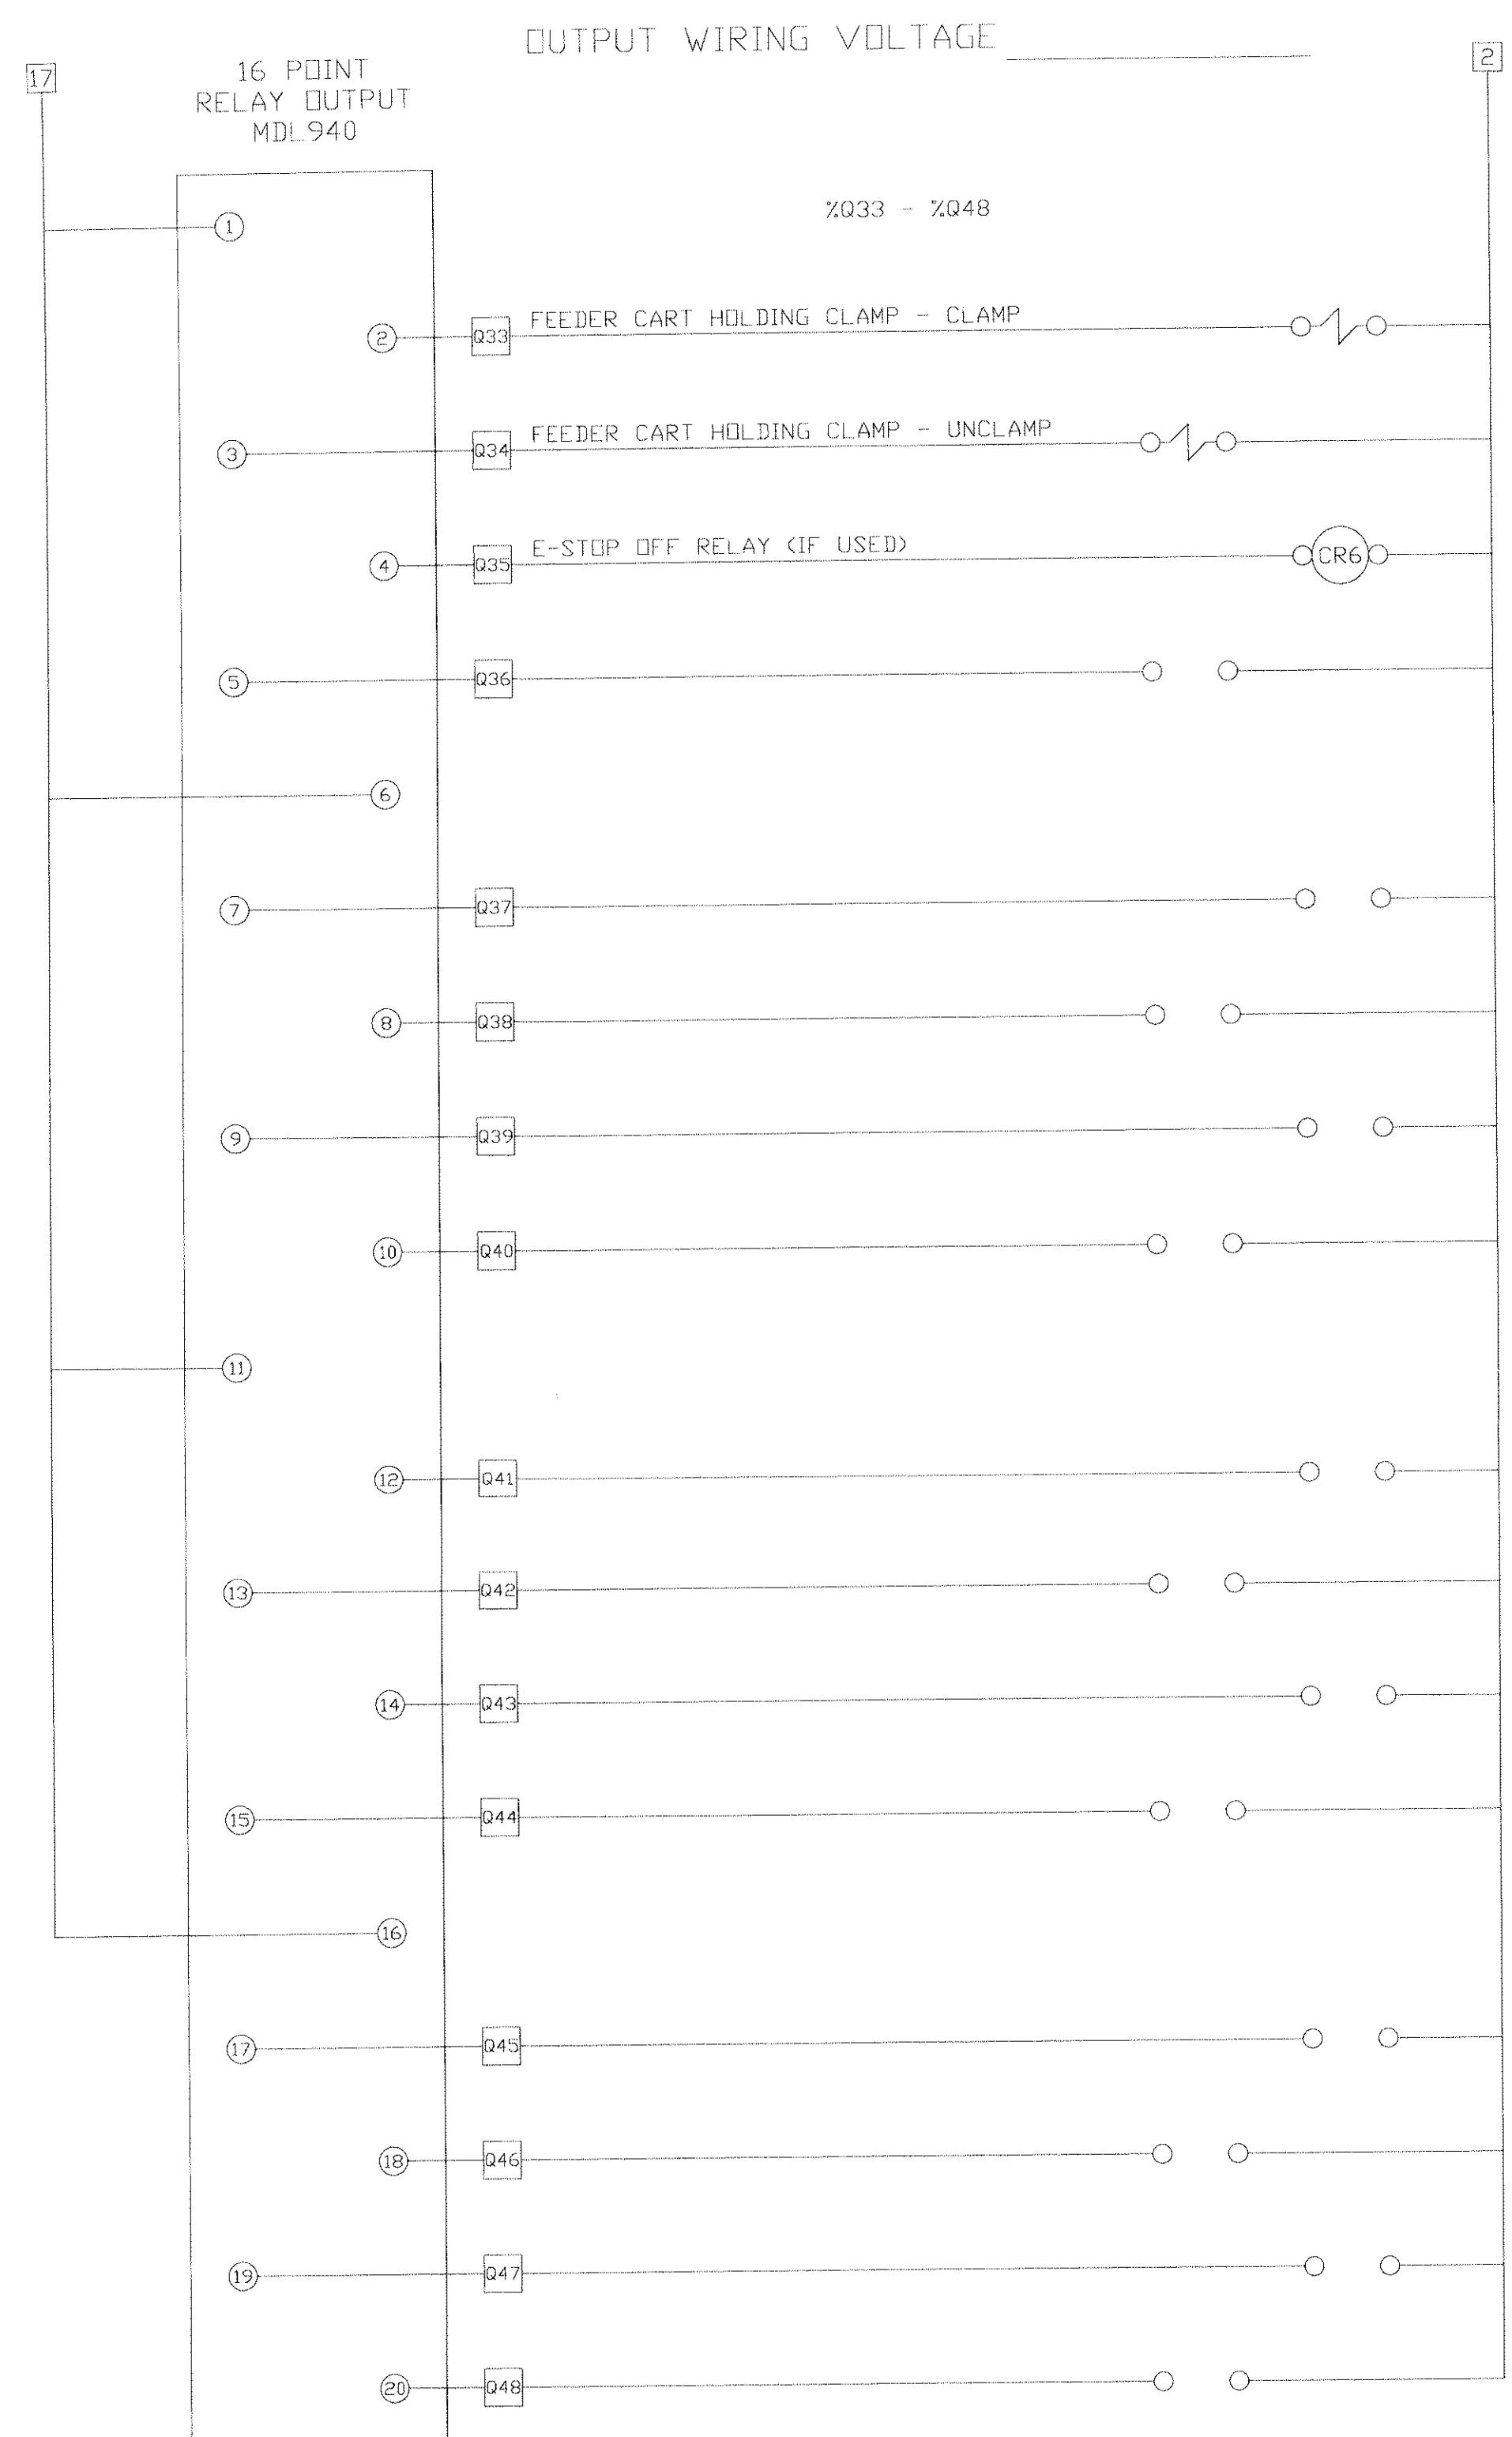


ALL WIRING FROM TERMINAL BLOCKS
TO PLC MODULES SHALL BE 16AWG MTW,
ALL OTHER WIRING SHOWN SHALL BE
14AWG MTW UNLESS OTHERWISE NOTED.
THE COLOR CODE AT RIGHT SHALL
BE USED FOR ALL WIRING.

LEGEND


xx	- TERMINAL IN PLC PANEL	⊙	- PILOT/ALARM LAMP
xx	- TERMINAL IN MACH. OPERATOR CONSOLE	xx	- RELAY/CONTACTOR
xx	- TERMINAL IN HYD. PUMP STARTER PANEL	⚡	- HYDRAULIC OR PNEUMATIC SOLENOID VALVE
xx	- TERMINAL IN A TURNABLE PANEL	⬆	- PROXIMITY SWITCH
⊗	- TERMINATION POINT AT PLC I/O MODULE	⚡	- LIMIT SWITCH (MECHANICAL)
⊗	- SWITCH (PUSH BUTTON, SELECTOR, KEY, ETC.)	🔊	- ALARM HORN

WIRE COLOR CODE		
COLOR	FUNCTION	VOLTAGE
WHITE	NEUTRAL	120/220VAC
BROWN	PLC INPUT	120/220VAC, 24VDC
ORANGE	PLC OUTPUT	120/220VAC, 24VDC
BLUE	PLC I/O	5-50VDC
BLACK	1 PHASE	220-600VAC
BLACK	3 PHASE	220-600VAC
GREEN	GROUND	GROUND
RED	1 PHASE	120VAC
YELLOW	PANEL TO PANEL (EXTERNALLY POWERED)	120/220VAC, 24VDC


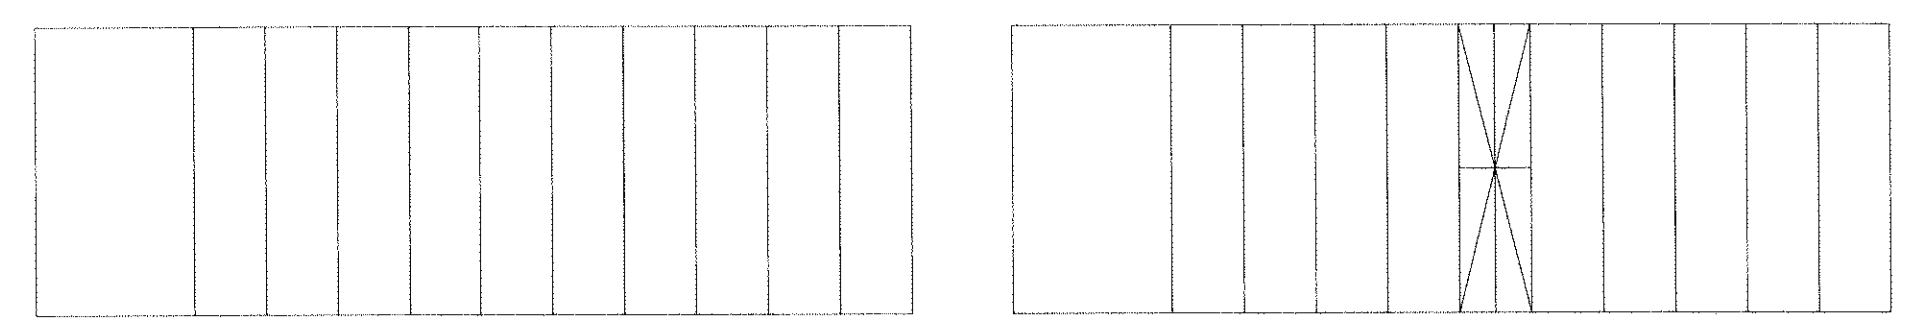


HAWKEYE CONCRETE PRODUCTS CO.					
MEDIAPOLIS, IOWA					
PIPE PRO III OUTPUT WIRING 2033 TO 2048					
TOLERANCES (UNLESS SPECIFIED)					DISC
FRACTIONAL #1/16" DECIMAL		ANGULAR		DRAWING NO. ISSUE	
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	
N.T.S.	5/4/93	DEM		26-3	27805D B

FIELD WIRING

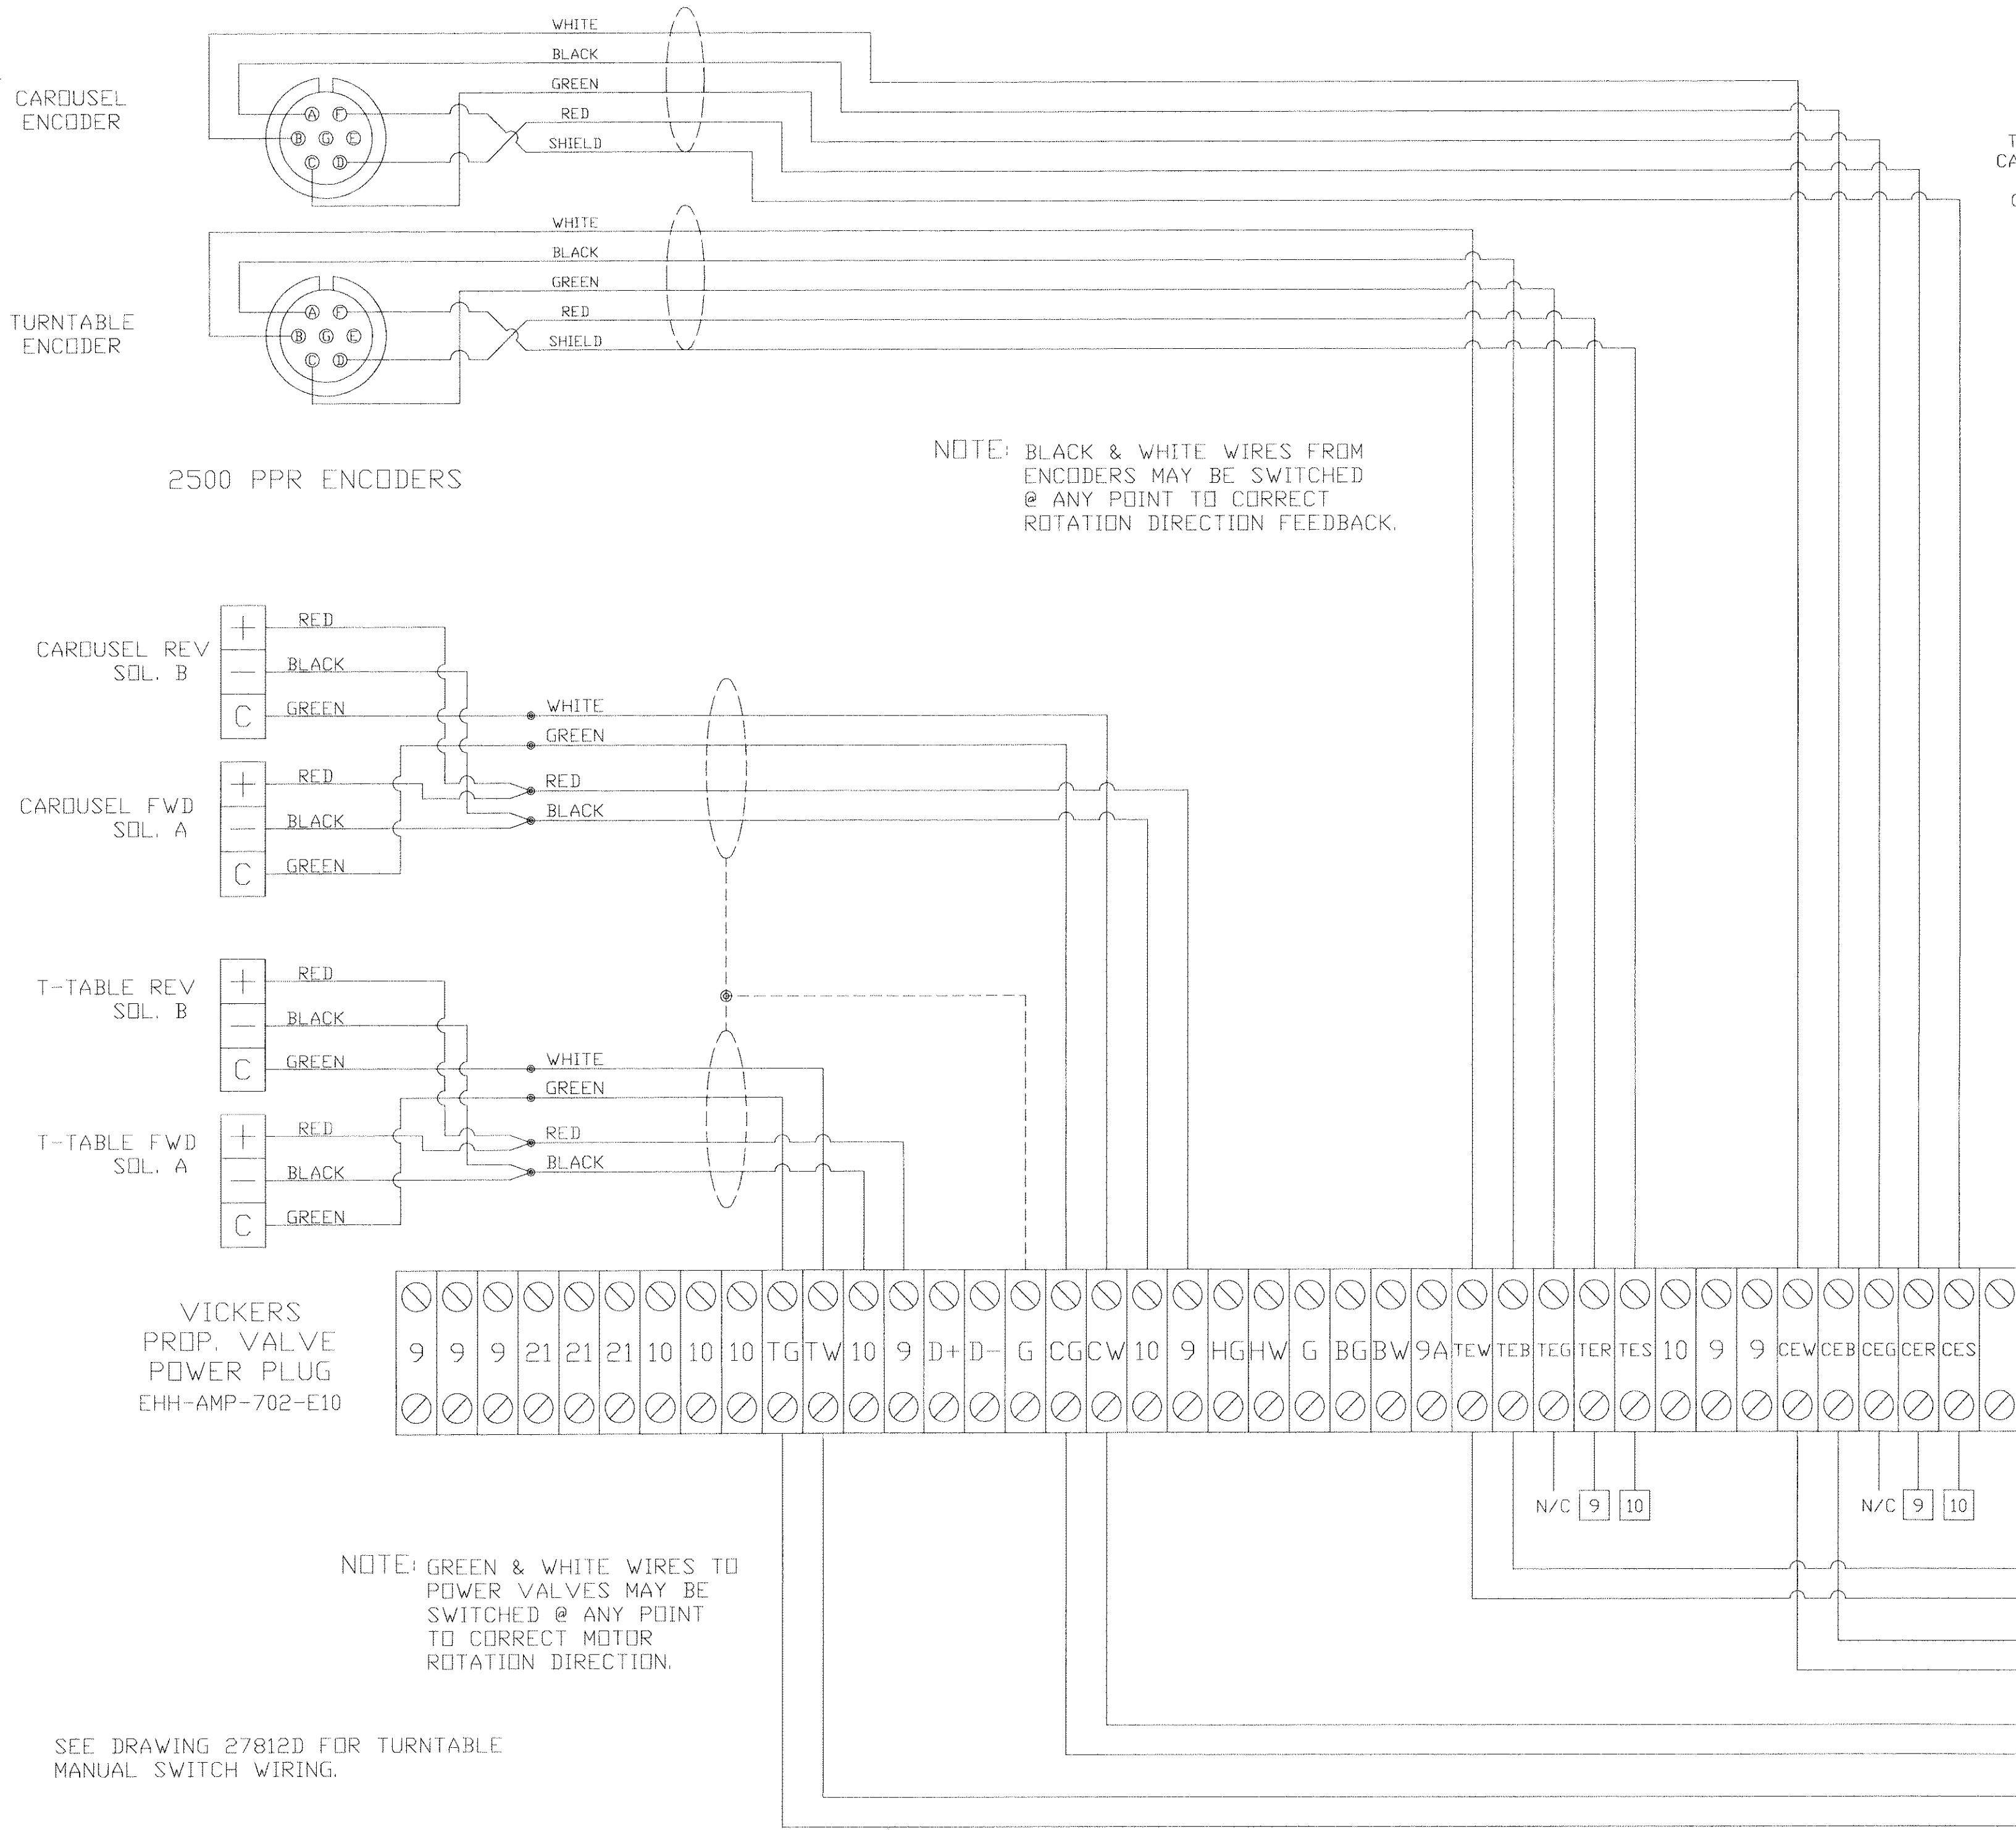

%A11 - %A115
%I129 - %I144
%Q129 - %Q144
T-TABLE POS %A14/5
CAROUSEL POS %A10/11
T-TABLE VEL %A12
CAROUSEL VEL %A13

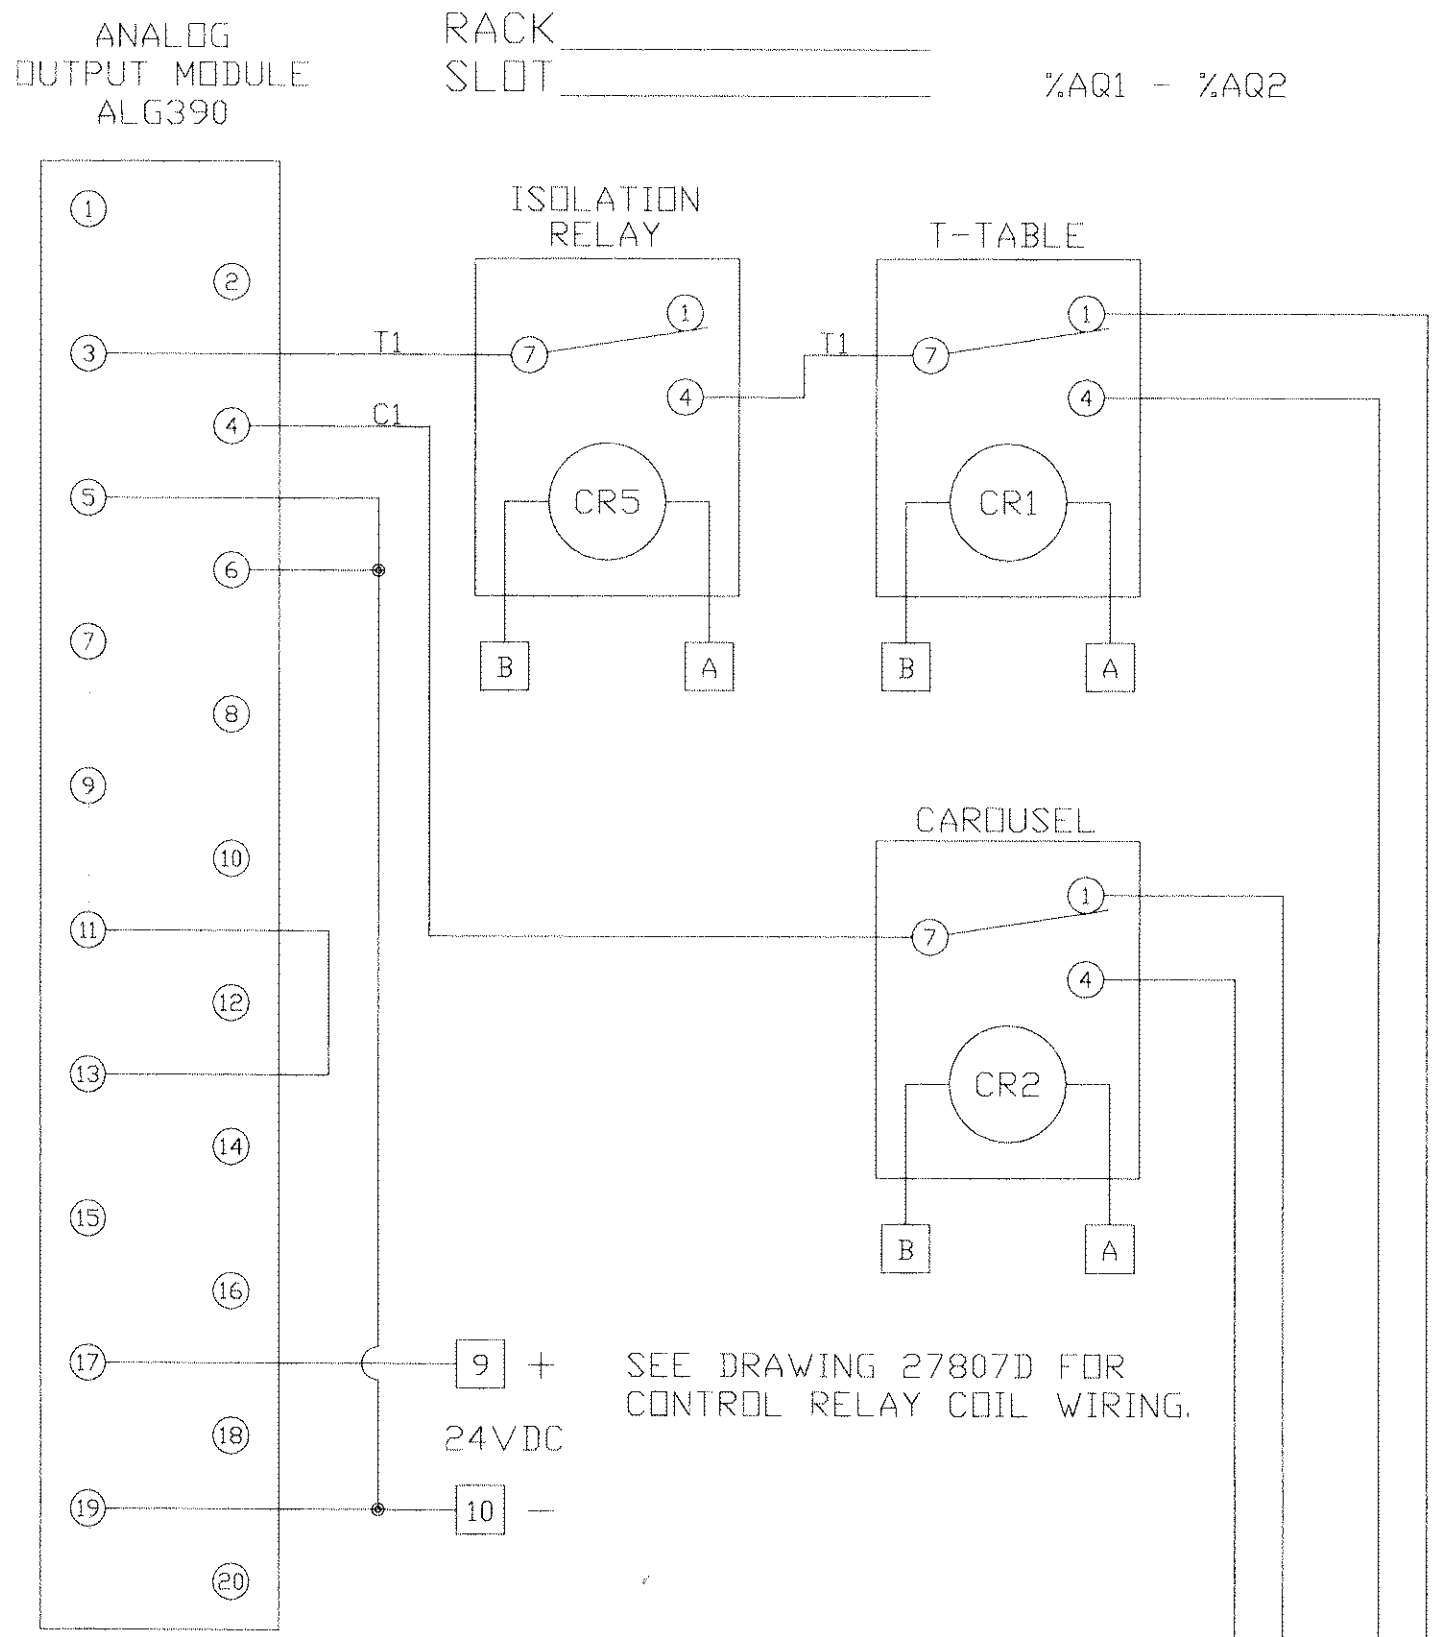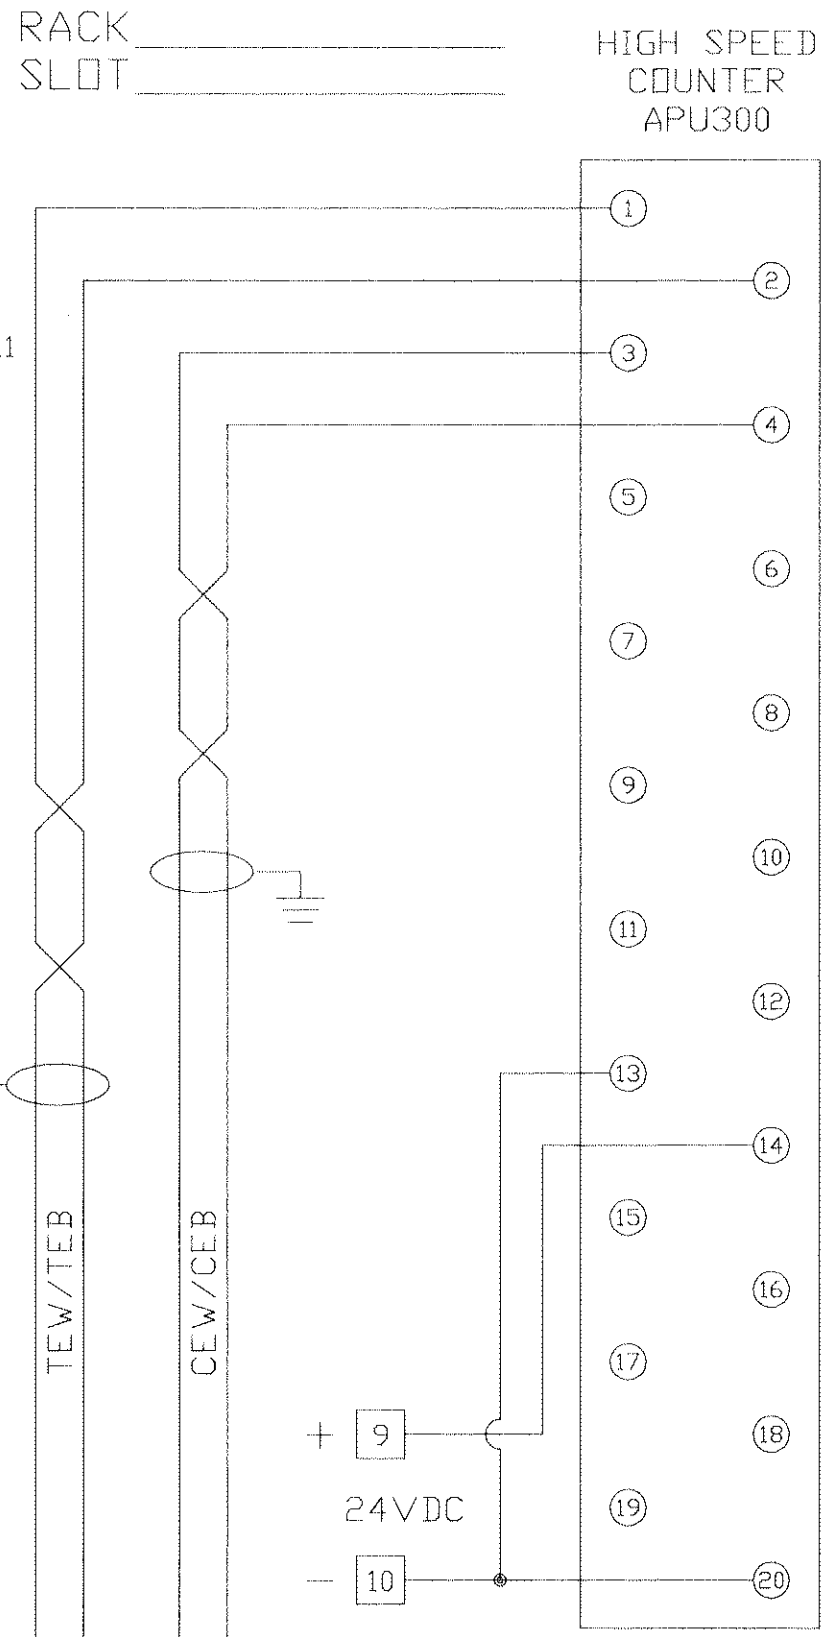








SEE DRAWING 27807D FOR CONTROL RELAY COIL WIRING.

LEGEND

- xx - TERMINAL IN PLC PANEL
- xx - TERMINAL IN MACH. OPERATOR CONSOLE
- xx - TERMINAL IN HYD. PUMP STARTER PANEL
- △ - TERMINAL IN A TURNTABLE PANEL
- ⊗ - TERMINATION POINT AT PLC I/O MODULE
- - SWITCH (PUSH BUTTON, SELECTOR, KEY, ETC.)
- - PILOT/ALARM LAMP
- xx - RELAY/CONTACTOR
- ⚡ - HYDRAULIC OR PNEUMATIC SOLENOID VALVE
- ◇ - PROXIMITY SWITCH
- - LIMIT SWITCH (MECHANICAL)
- 🔊 - ALARM HORN

COLOR	WIRE COLOR CODE	FUNCTION	VOLTAGE
WHITE	NEUTRAL		120/220VAC
BROWN	PLC INPUT		120/220VAC, 24VDC
ORANGE	PLC OUTPUT		120/220VAC, 24VDC
BLUE	PLC I/O		5-50VDC
BLACK	1 PHASE		220-600VAC
BLACK	3 PHASE		220-600VAC
GREEN	GROUND		GROUND
RED	1 PHASE		120VAC
YELLOW	PANEL TO PANEL	(EXTERNALLY POWERED)	120/220VAC, 24VDC

HAWKEYE CONCRETE PRODUCTS CO.									
MEDIAPOLIS, IDWA									
PIPE PRO III T-TABLE AND P-HEAD CAROUSEL									
ENCODER AND PROPORTIONAL VALVE WIRING DIAGRAM									
TOLERANCES (UNLESS SPECIFIED)									
FRACTIONAL #1/16" DECIMAL ANGULAR DISC									
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	DRAWING NO. ISSUE				
N.T.S.	5/4/93	DEM		26-3	27811D B				

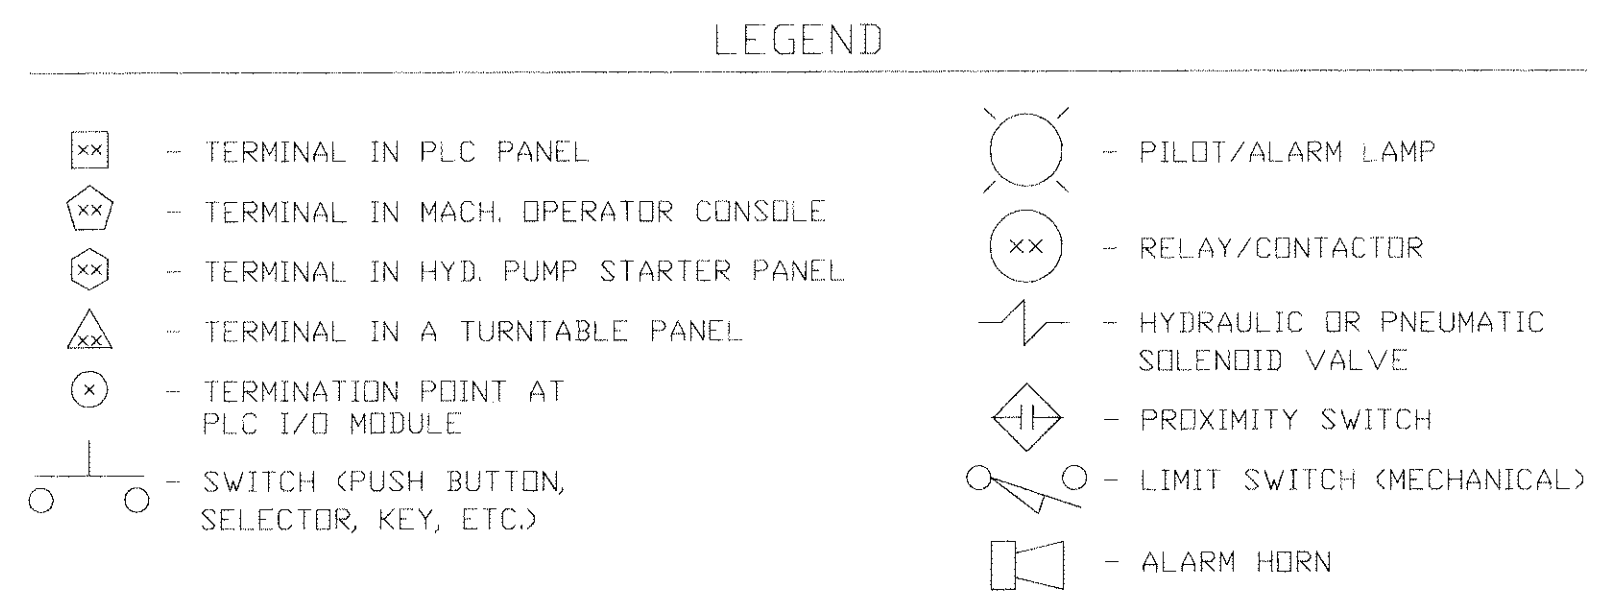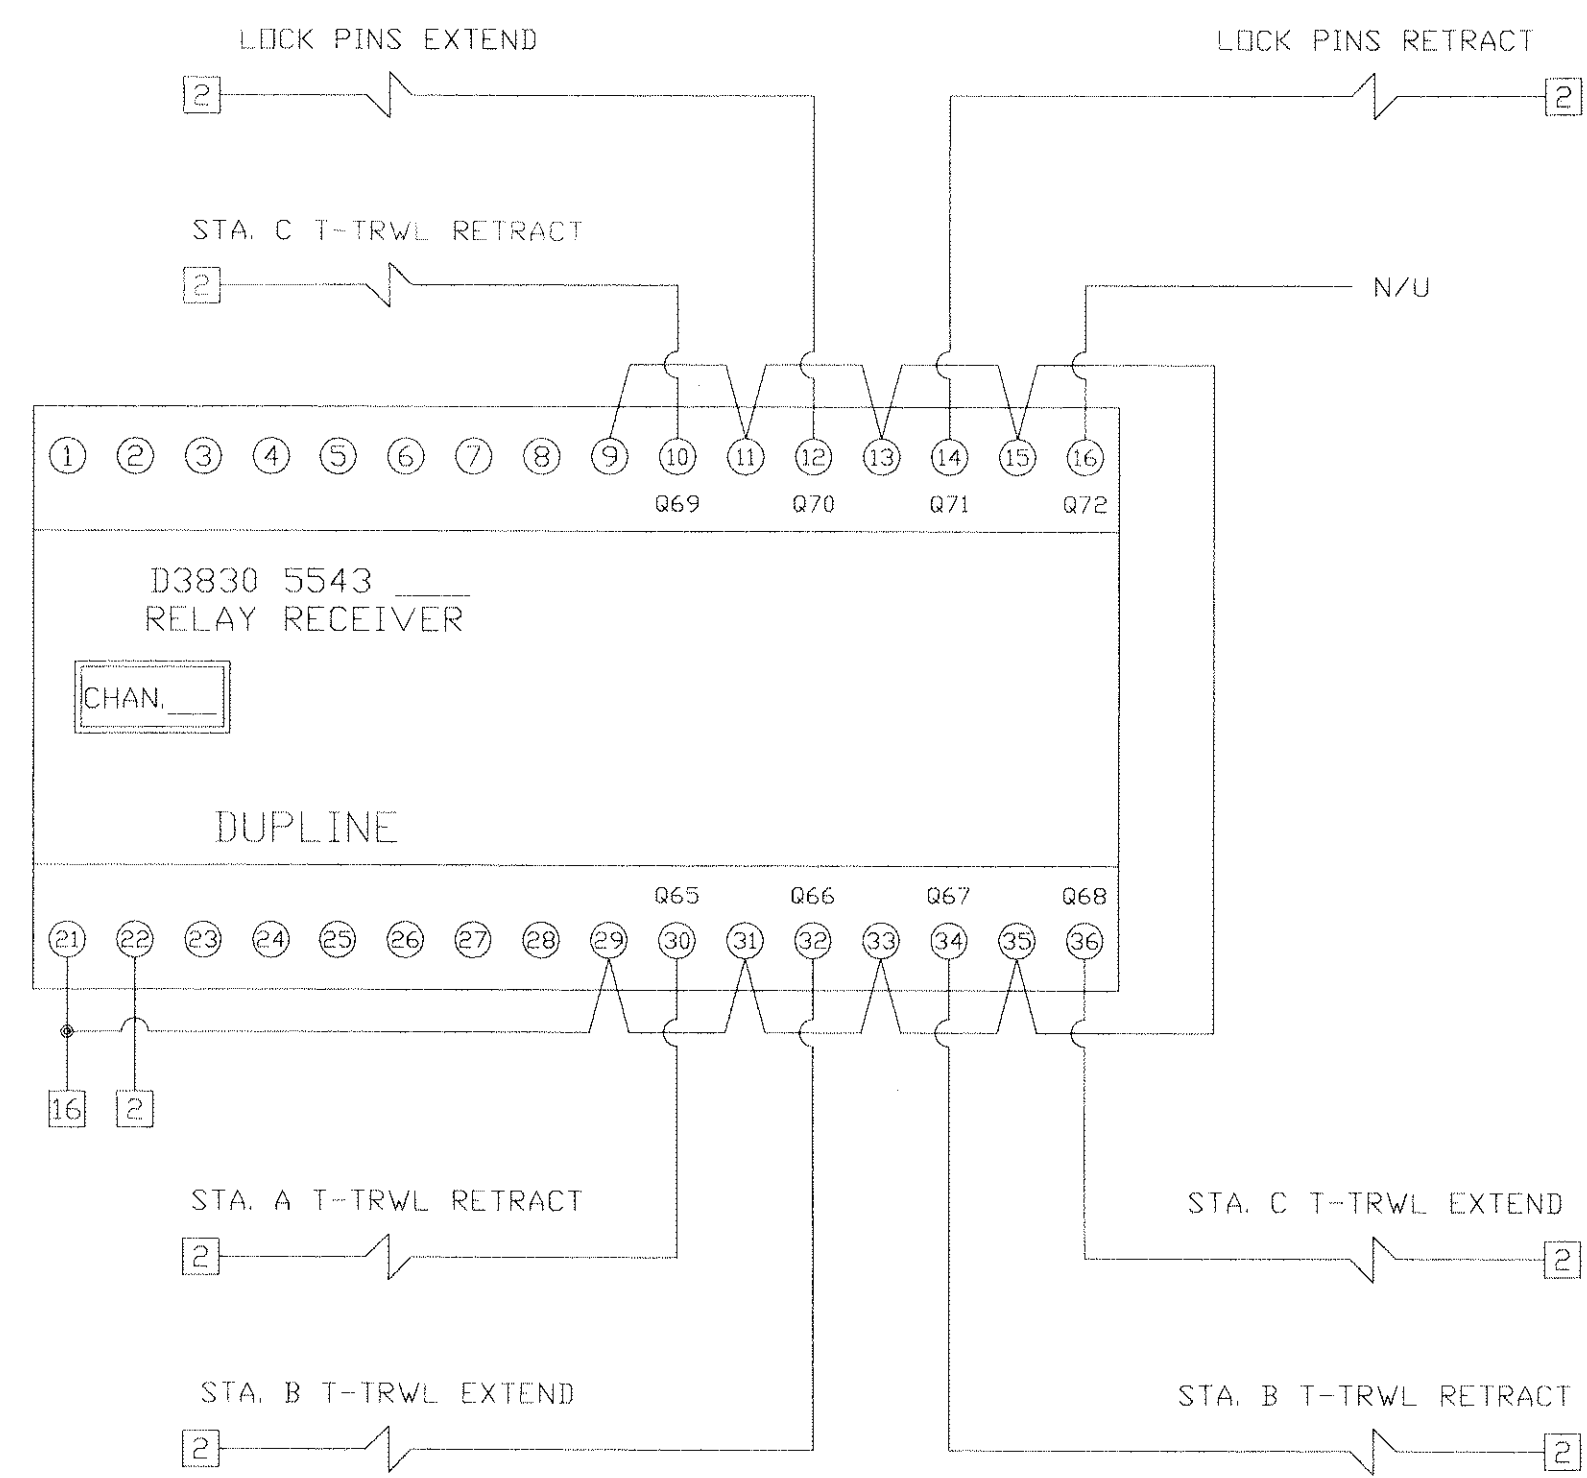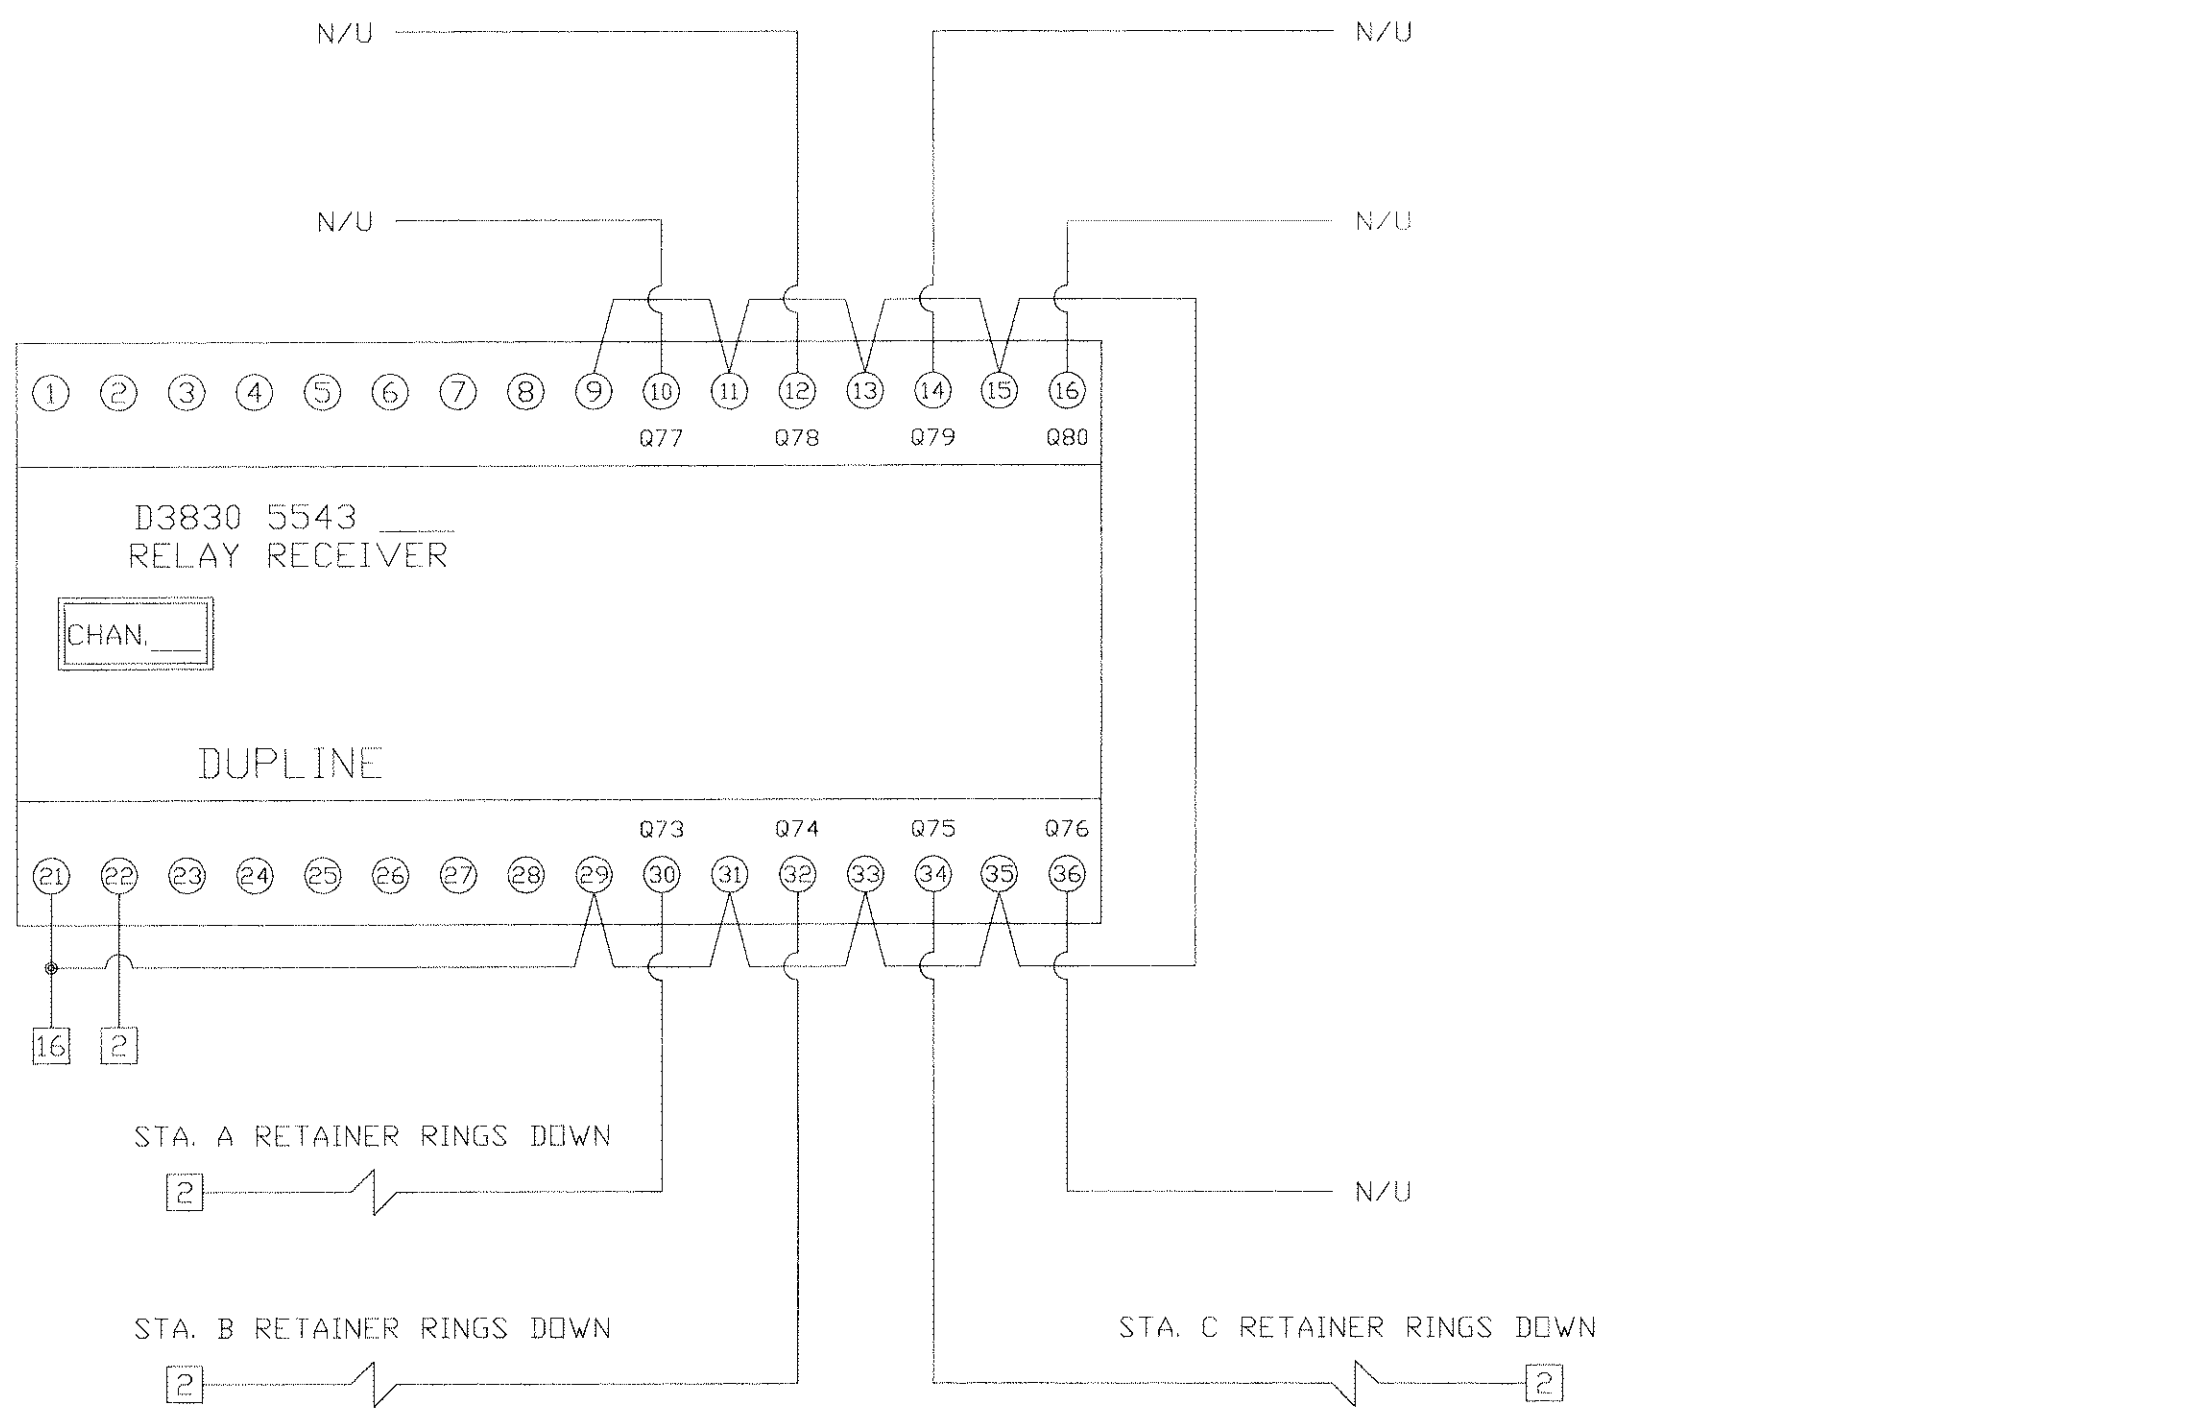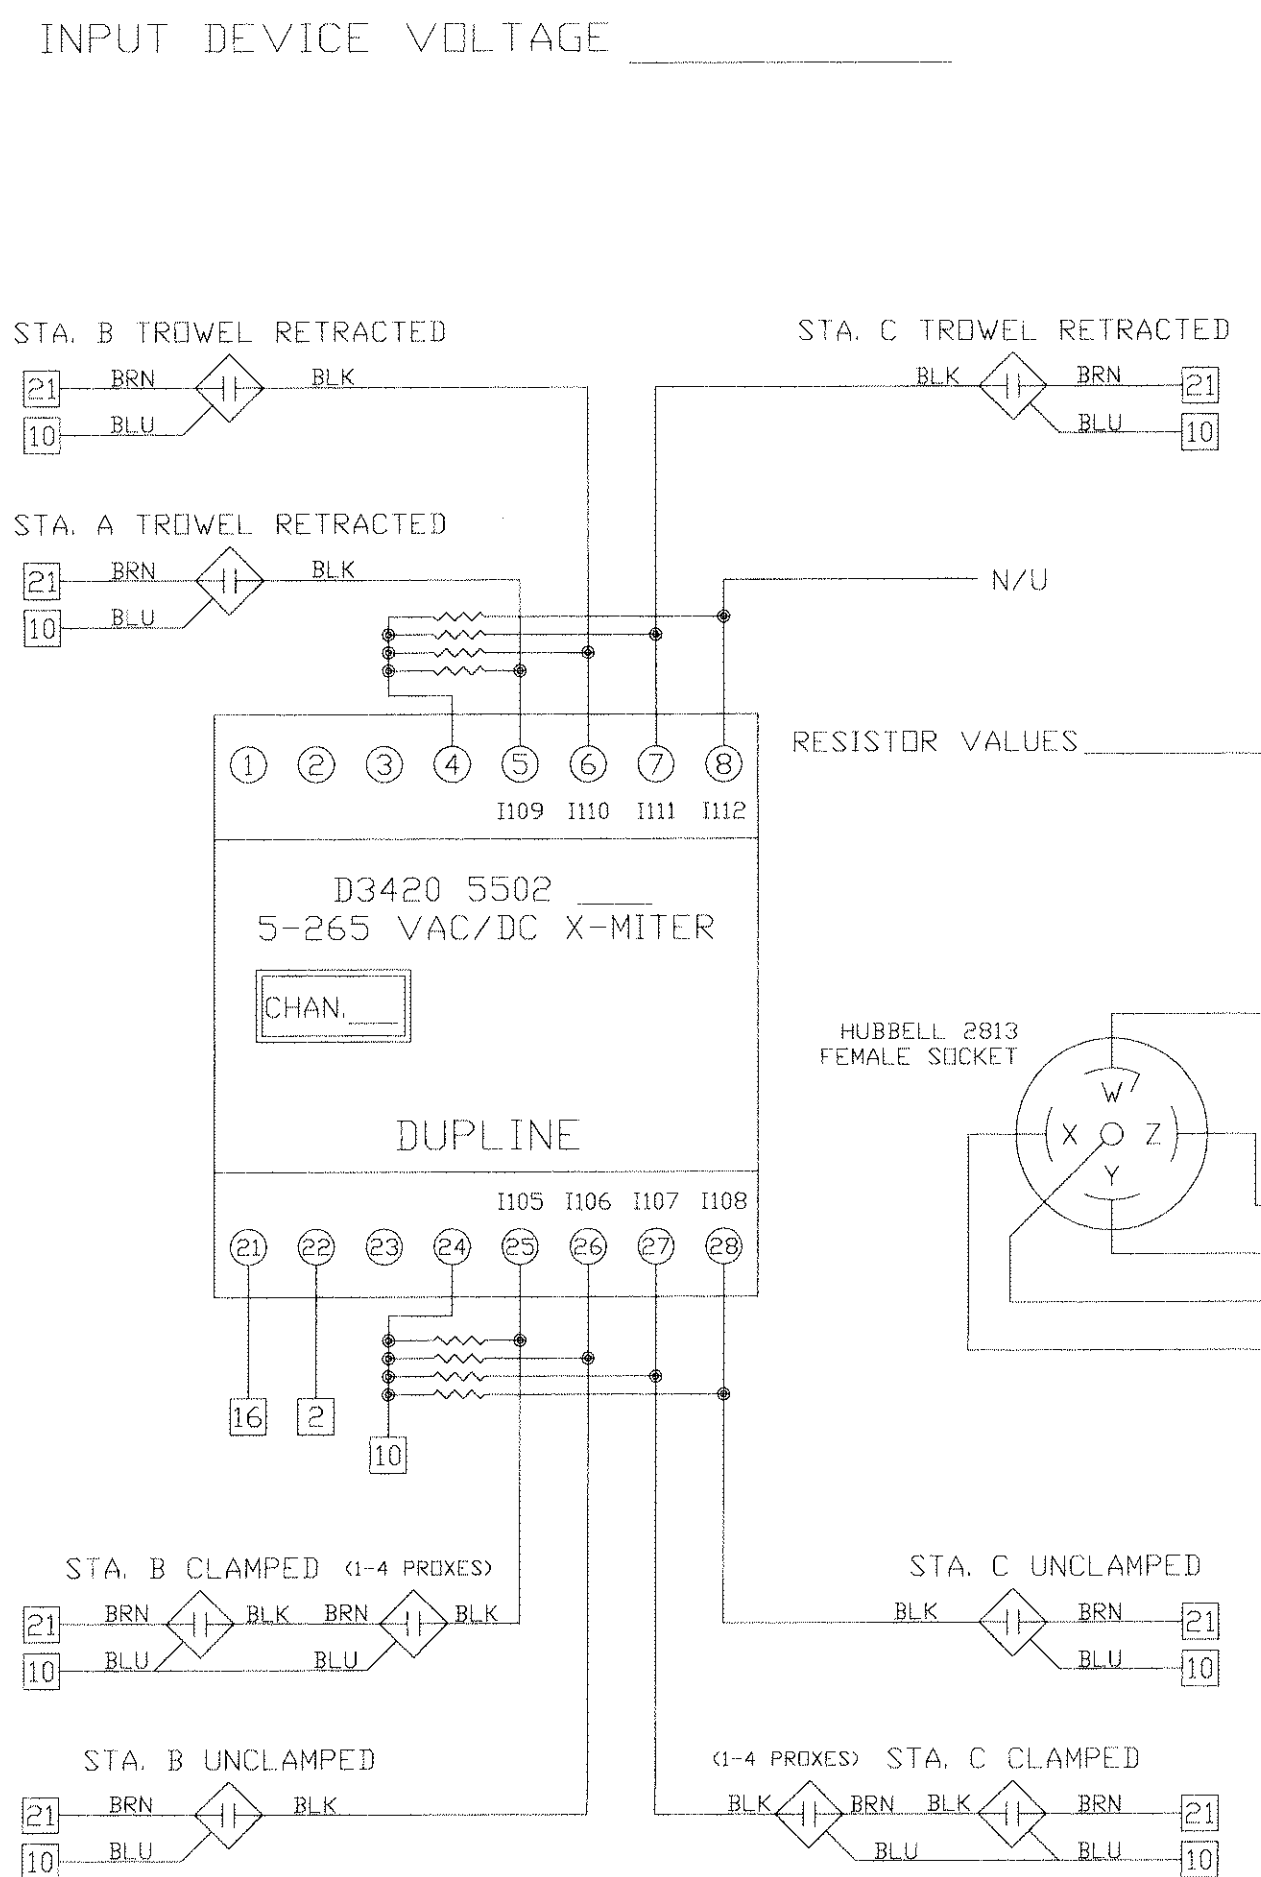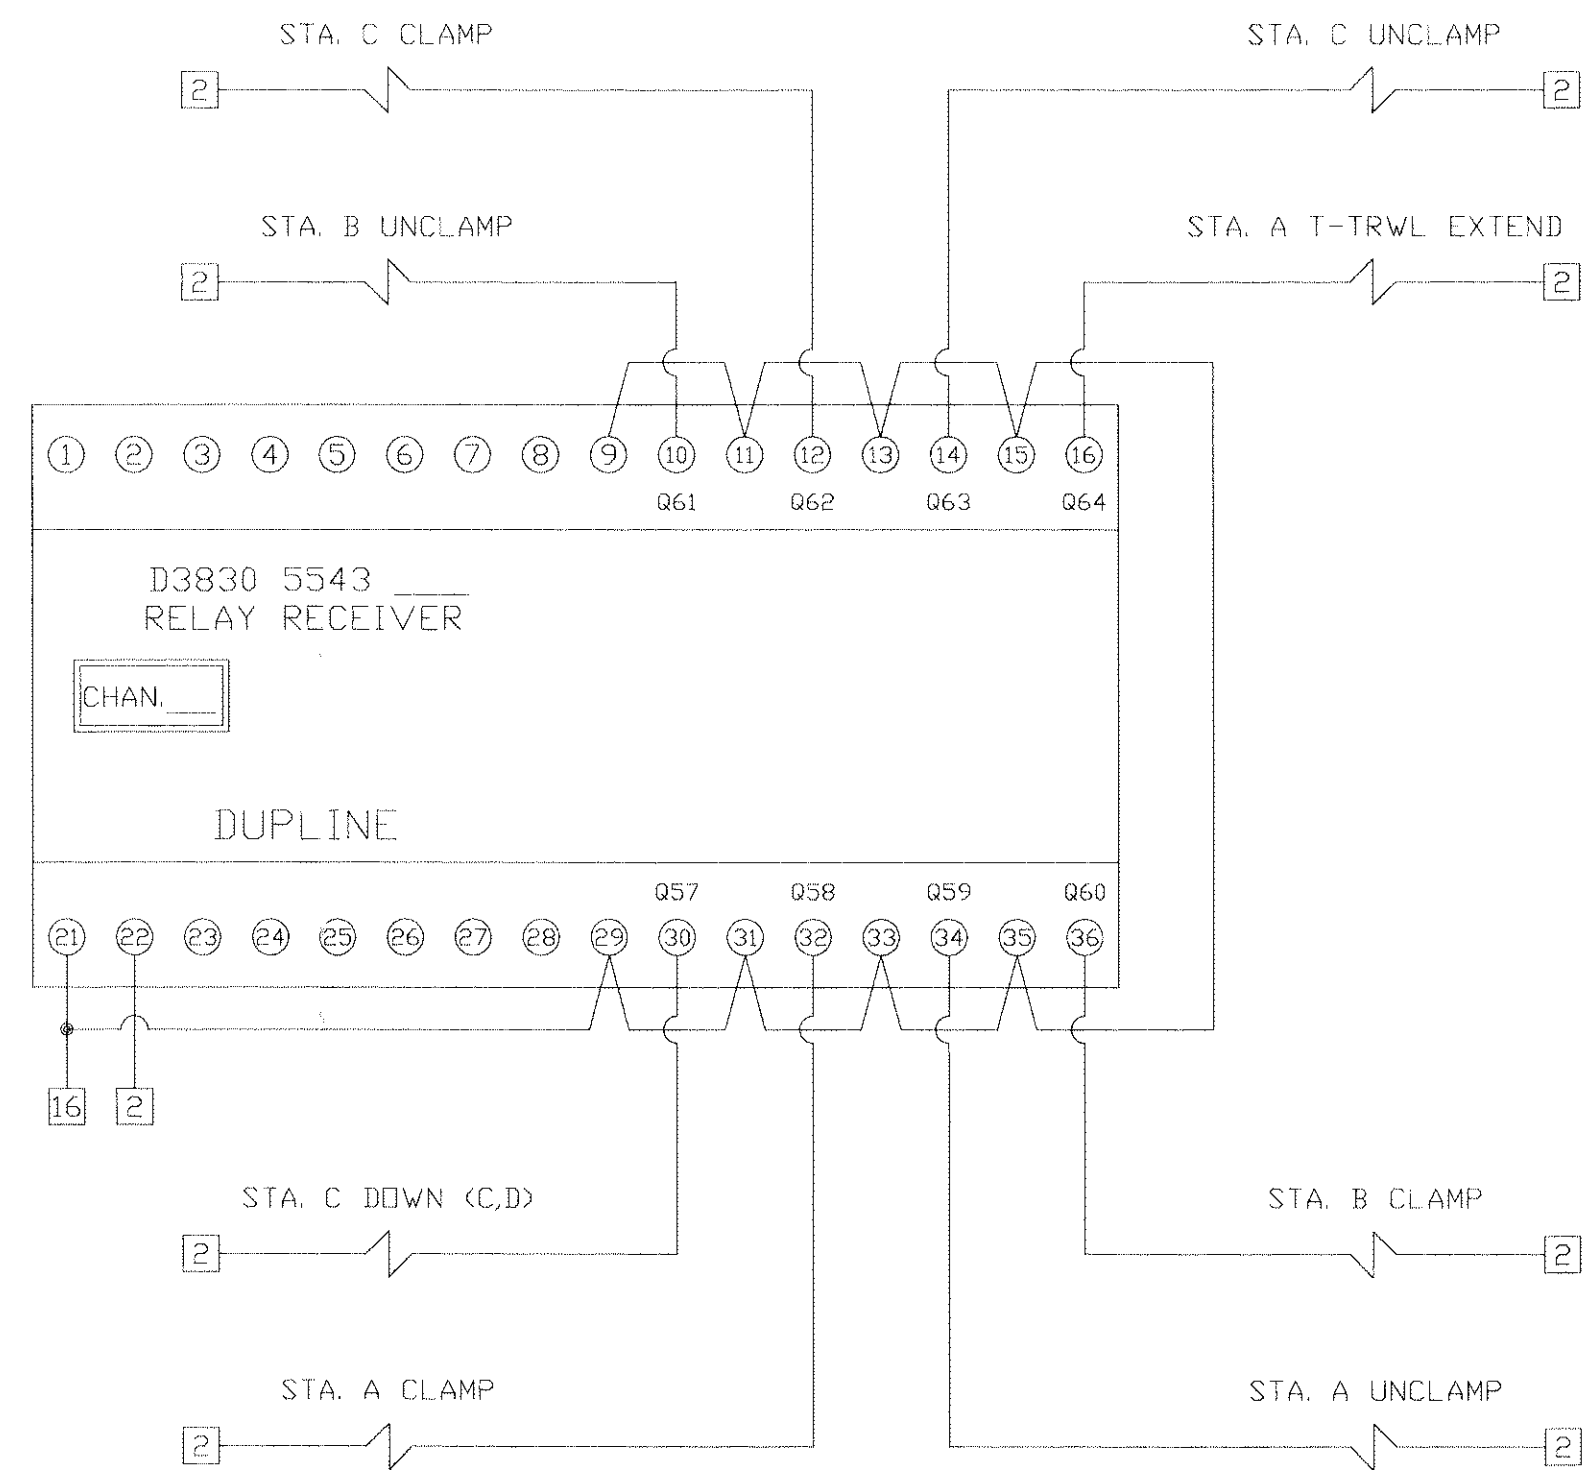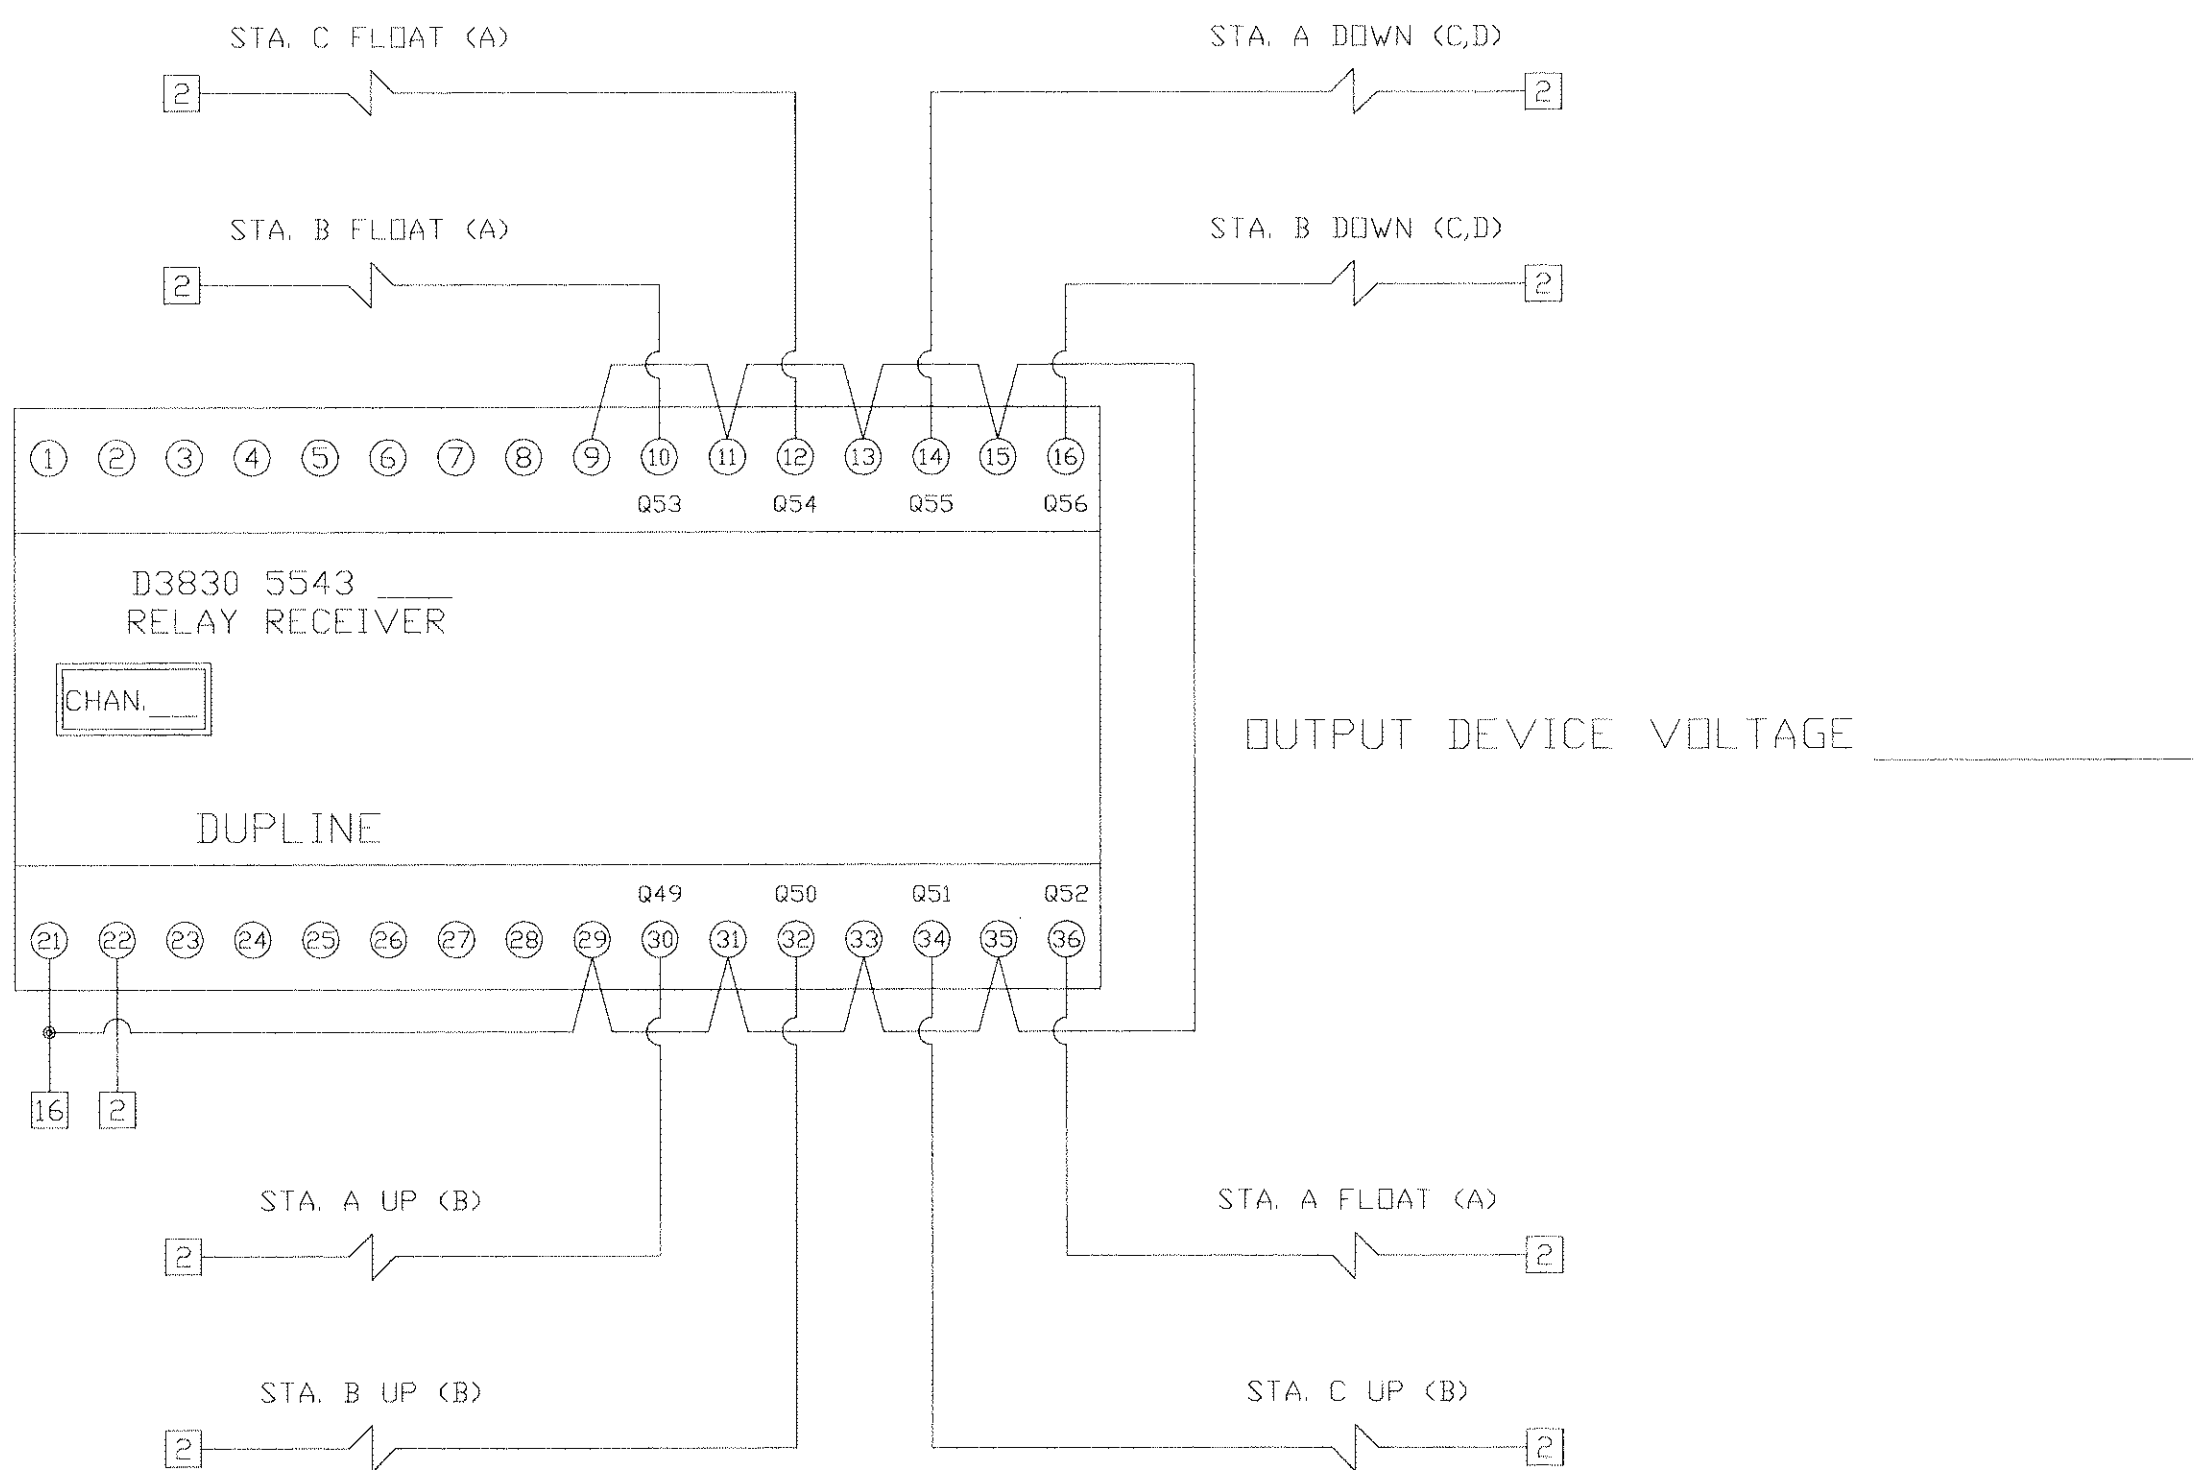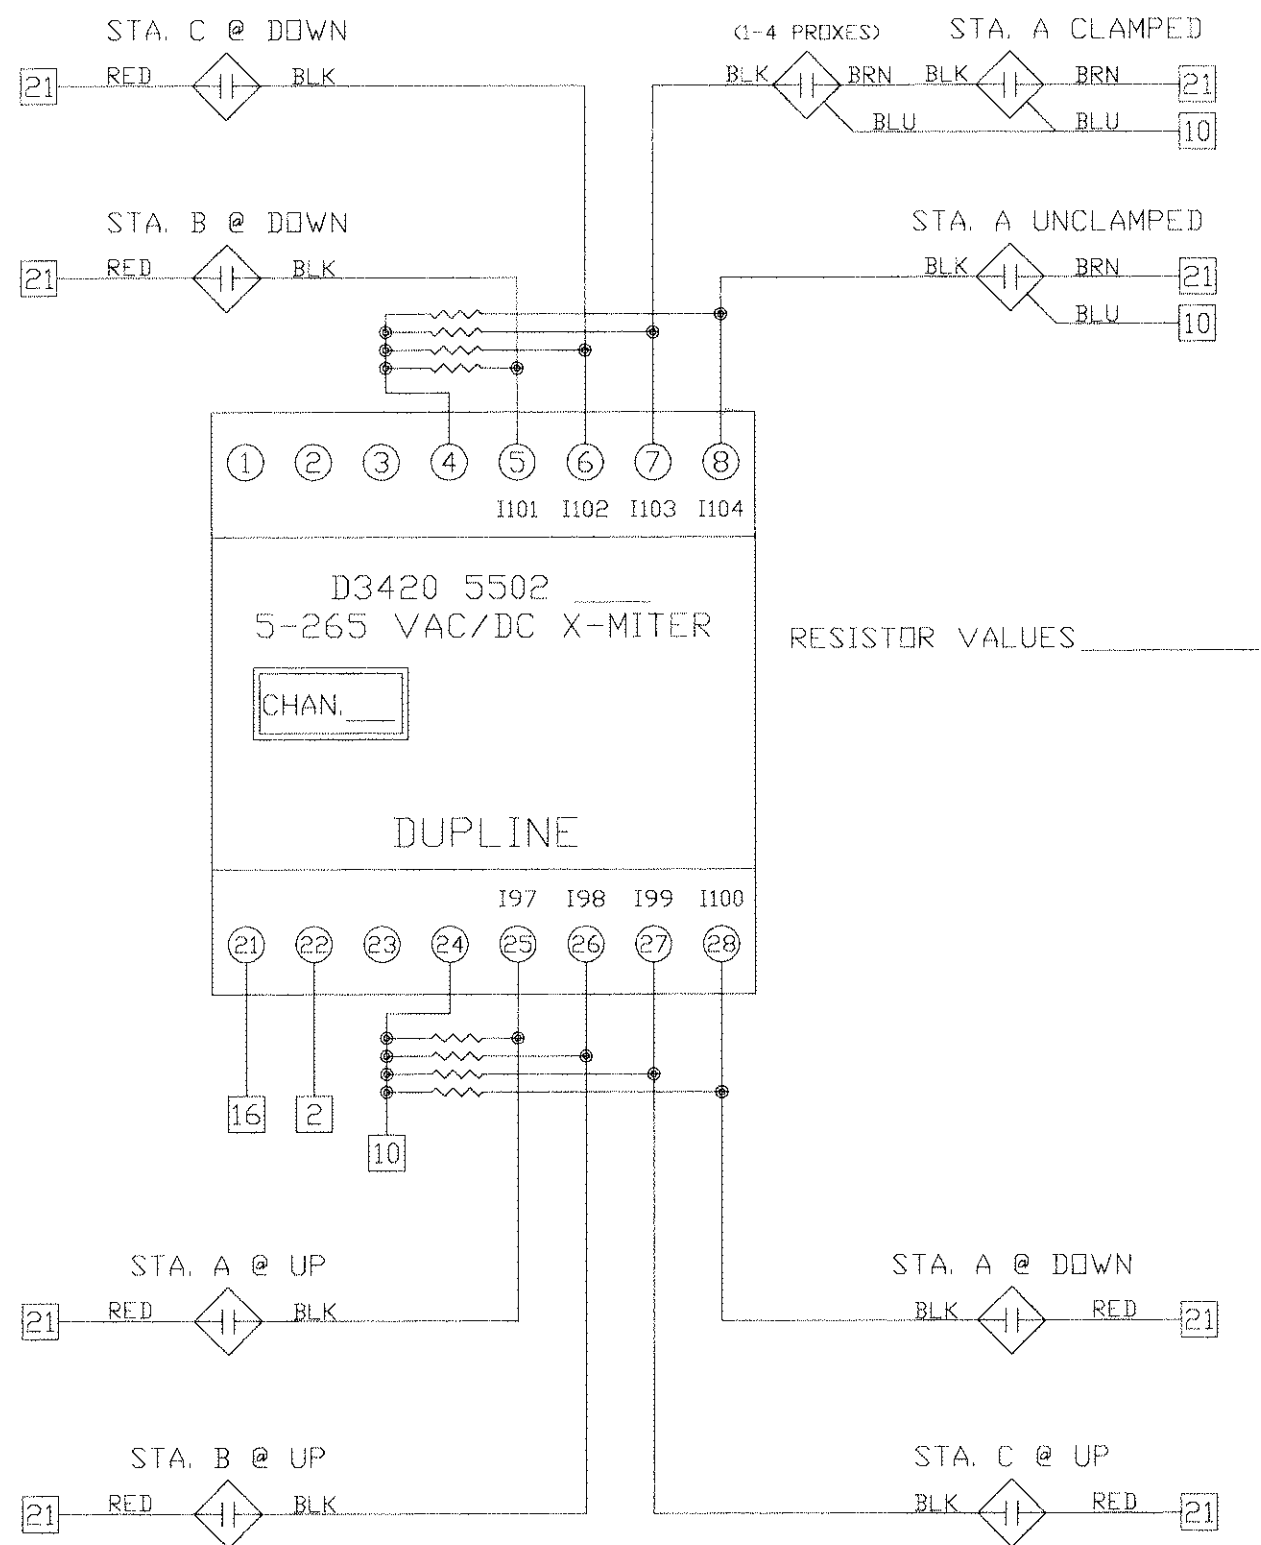

COLOR	WIRE COLOR CODE	FUNCTION	VOLTAGE
WHITE	NEUTRAL		120/220VAC
BROWN	PLC INPUT		120/220VAC, 24VDC
ORANGE	PLC OUTPUT		120/220VAC, 24VDC
BLUE	PLC I/O		5-50VDC
BLACK	1 PHASE		220-600VAC
BLACK	3 PHASE		220-600VAC
GREEN	GROUND		GROUND
RED	1 PHASE		120VAC
YELLOW	PANEL TO PANEL	(EXTERNALLY POWERED)	120/220VAC, 24VDC

HAWKEYE CONCRETE PRODUCTS CO.							
MEDIAPOLIS, IOWA							
PIPE PRO III DUPLINE CAROUSEL FIELD WIRING							
INPUTS %197-%1112				OUTPUTS %Q49-%Q80			
TOLERANCES (UNLESS SPECIFIED)							
FRACTIONAL ±1/16" DECIMAL				ANGULAR			
SCALE	DATE	DRAWN	APPR. BY	FILE NO.	DRAWING NO.	ISSUE	
N.T.S.	5/4/93	DEM		26-3	27808D	B	