


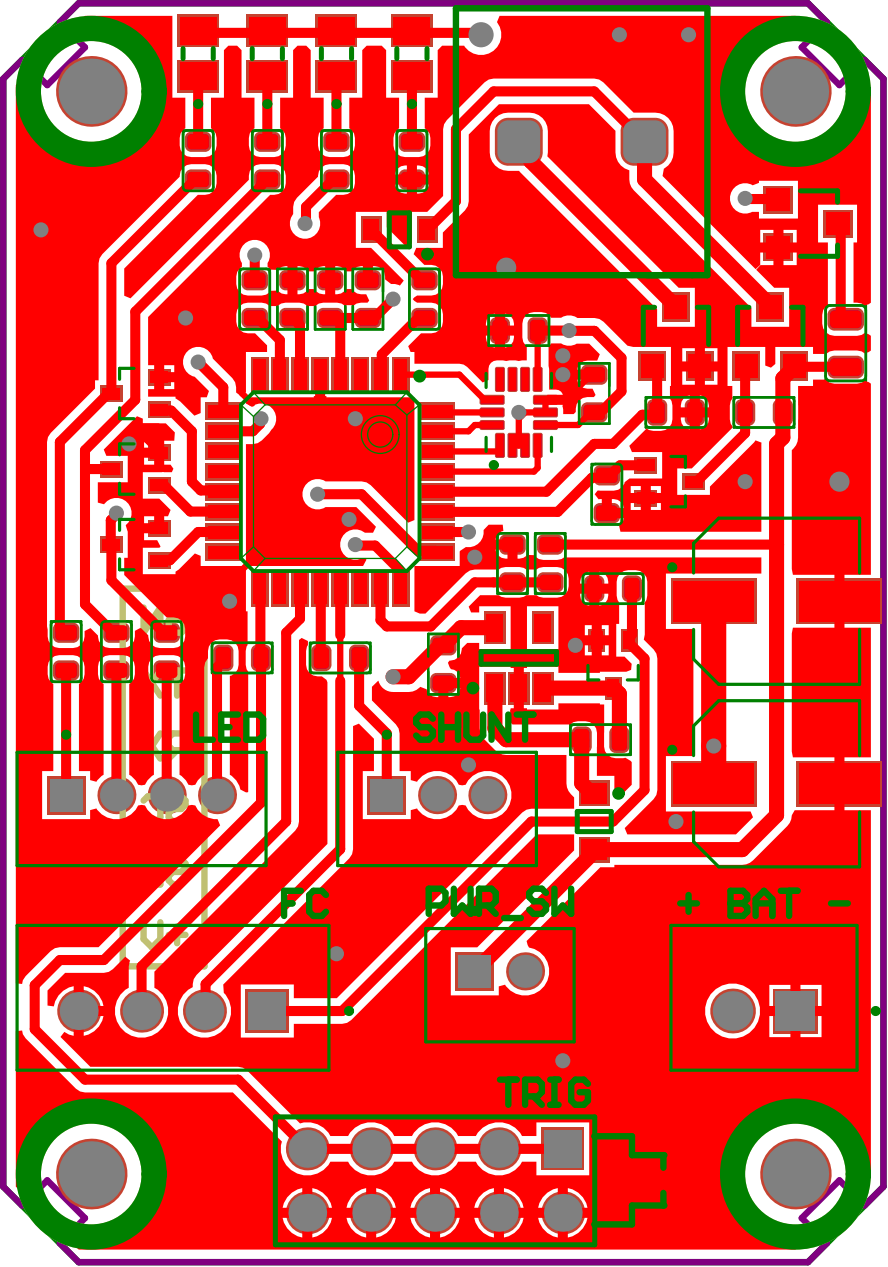

LED

SHUNT

FC


PWR_SW


+ BAT -

TRIG

Useage in UK
SH 2

V+
2D
3C
RX
TX
GN

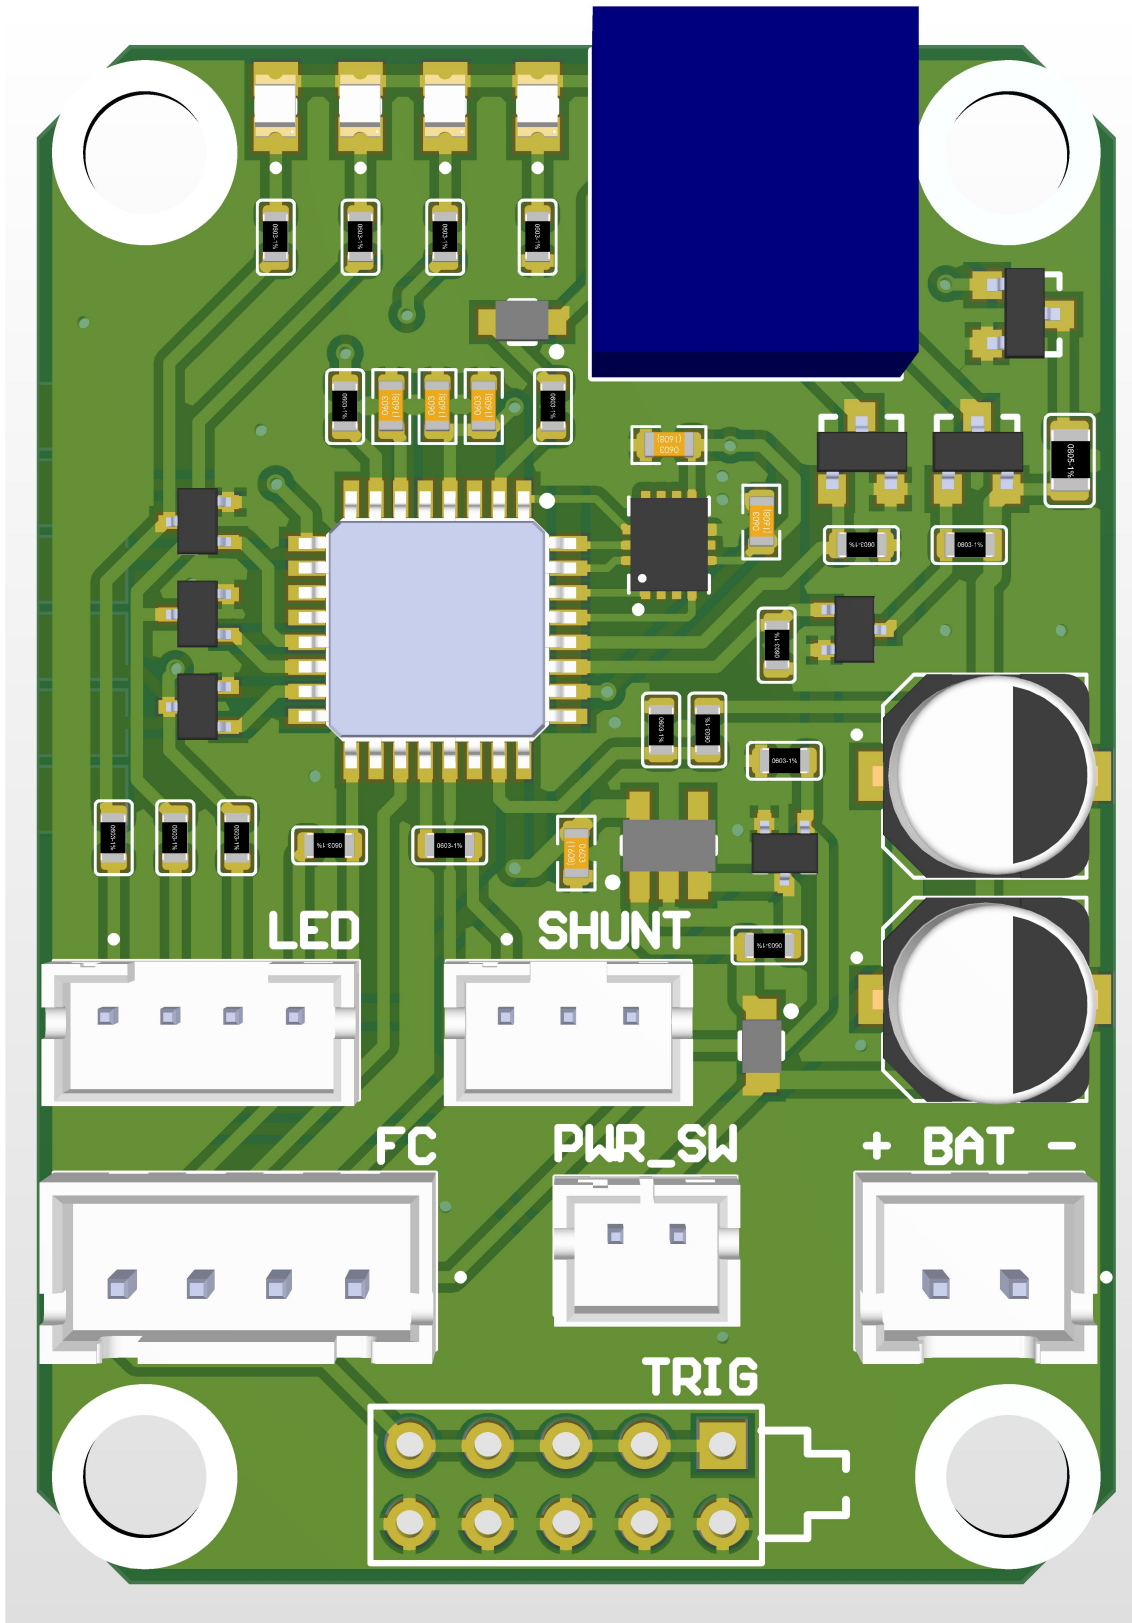

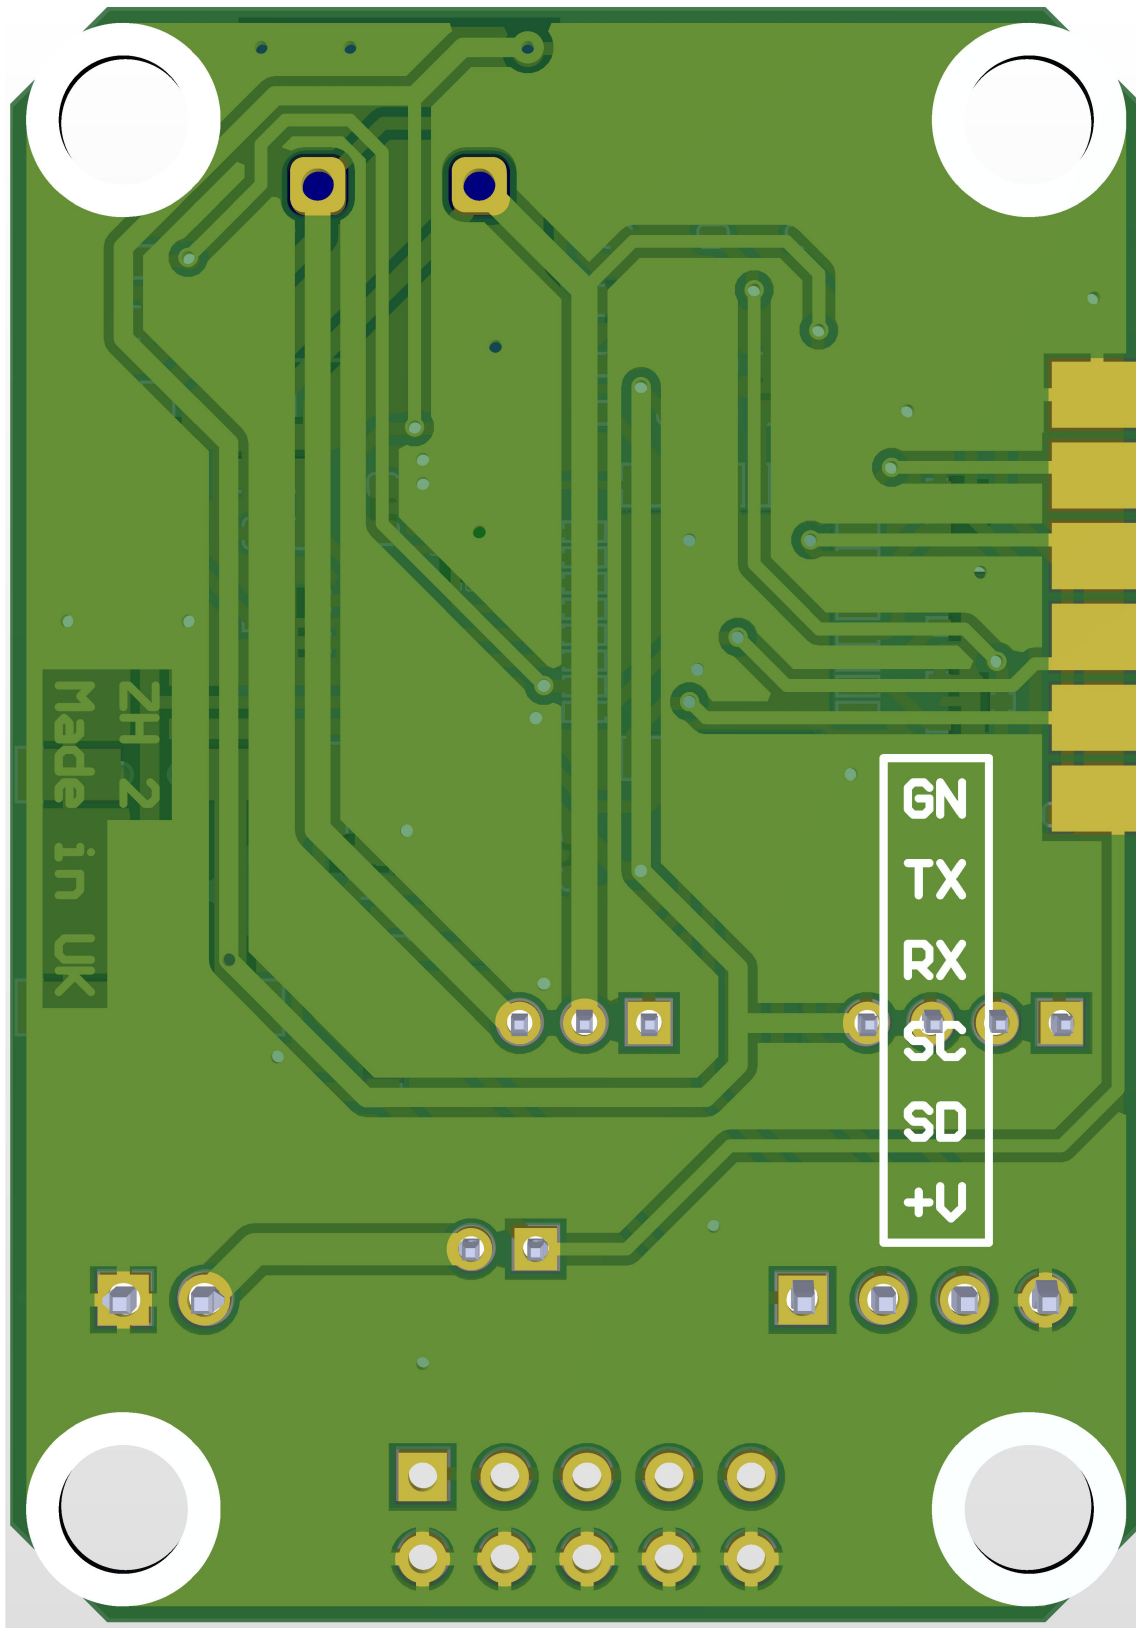

ZH 2
Made in UK

GN
TX
RX
SC
SD
+V

Comment	Description	Designator	Footprint	LibRef	Quantity	JLPCB Part #
B2B-XH-A_(LF)(SN)	Connector Header Through Hole 2 position 0.098 (2.50mm)	+ BAT -	JST_B2B-XH- A_(LF)(SN)	B2B-XH-A_(LF)(SN)	1	
4.7uF	SMD 0603 25V X7R 10%	C1	C 0603(1608)x0.8	C 0603 25V X7R - 330n	1	
0.1uF	SMD 0603 25V X7R 10%	C2, C4, C5	C 0603(1608)x0.8	C 0603 25V X7R - 330n	3	
1uF	SMD 0603 25V X7R 10%	C3, C8	C 0603(1608)x0.8	C 0603 25V X7R - 330n	2	
470uF 10V	470µF 6.3V Aluminum Electrolytic Capacitors Radial, Can - SMD 340mOhm @ 100kHz 2000 Hrs @ 105A°C	C6, C7	CAP_EEEFKJ471XSL	EEEFKJ471XSL	2	C2992610
CUS10S30	Schottky Barrier Diode, 2-Pin SOD-323, Tape and Reel	D1, D4	ONSC-SOD-323-2-477- 02_V	BAT54HT1	2	C146335
XINGLIGHT XL- 2012SYGC	LED;Red;11mcd;0.061 In.Dia.;SMD;100mA;2 V Vf;635nm;140deg;SM D;White Diffused;5V Vr Lumex SML- LXT0805W-TR	D2	LEDC2012X120N	SML-LXT0805W-TR	1	C965816
XINGLIGHT XL- 2012SURC	LED;Red;11mcd;0.061 In.Dia.;SMD;100mA;2 V Vf;635nm;140deg;SM D;White Diffused;5V Vr Lumex SML- LXT0805W-TR	D3, D5	LEDC2012X120N	SML-LXT0805W-TR	2	
XINGLIGHT XL- 2012UBC	LED;Blue;11mcd;0.06 1In.Dia.;SMD;100mA; 2V Vf;635nm;140deg;SM D;White Diffused;5V Vr Lumex SML- LXT0805W-TR	D6	LEDC2012X120N	SML-LXT0805W-TR	1	C965817
B4B-XH-A(LF)(SN)	Connector Header Through Hole 4 position 0.098 (2.50mm)	FC	JST_B4B-XH-A(LF)(SN)	B4B-XH-A(LF)(SN)	1	
B4B-PH-K-S(LF)(SN)	Connector Header Through Hole 4 position 0.079 (2.00mm)	LED	JST_B4B-PH-K- S(LF)(SN)	B4B-PH-K-S(LF)(SN)	1	
DG390-5.0-02P-12- 00A (H)		P3	Degson DG390-5.0- 02P-12-00A(H)	DG390-5.0-02P-12- 00A (H)	1	C784922
B2B-PH-K-S(LF)(SN)	Connector Header Through Hole 2 position 0.079 (2.00mm)	PWR_SW	JST_B2B-PH-K- S(LF)(SN)	B2B-PH-K-S(LF)(SN)	1	
IRLML6244	N-Channel Mosfet	Q1, Q5	SOT23	Mosfet N-ch	2	
IRLML6402	P-Channel Mosfet	Q2	SOT23	Mosfet P-ch	1	
BSS138W	N-Channel Mosfet	Q3, Q4, Q6, Q7, Q8	SOT65P22X110-3N	Mosfet N-ch	5	
10k	SMD 0603 0.1W 1% 75V	R1, R2, R3, R4, R5, R10, R11, R12, R13, R18, R19	R 0603(1608) -1%	R 0603-1%	11	C25804 [NoParam]
360	SMD 0603 0.1W 1% 75V	R6, R7, R8	R 0603(1608) -1%	R 0603-1%	3	C21190
10	SMD 0805 0.125W 1% 150V	R9	R 0805(2012) -1%	R 0805-1%	1	
680	SMD 0603 0.1W 1% 75V	R14	R 0603(1608) -1%	R 0603-1%	1	
300	SMD 0603 0.1W 1% 75V	R15, R16, R17	R 0603(1608) -1%	R 0603-1%	3	C25804
B3B-PH-K-S(LF)(SN)	B3B-PH-K-S(LF)(SN)	SHUNT	JST_B3B-PH-K- S(LF)(SN)	B3B-PH-K-S(LF)(SN)	1	
Header 5X2	Header, 5-Pin, Dual row	TRIG	HDR2X5	Header 5X2	1	
STM32G030K6T6	ARM® Cortex®- M0+ STM32G0 Microcontroller IC 32- Bit Single-Core 64MHz 32KB (32K x 8) FLASH 32-LQFP (7x7)	U1	QFP32_STM32	STM32G030K6T6	1	
LSM6DS3	Accelerometer, Gyroscope, 6 Axis Sensor I²C, SPI Output	U2	PQFN50P250X300XB6- 14N	LSM6DSOXTR	1	C967633
AP2202K-3.3TRG1	Micropower 150 mA Low-Noise Ultra Low- Dropout Regulator, 5- pin SOT-23, Pb-Free	U3	MF05A_N	LP2985IM5-3.3/NOPB	1	C150442

