


POV DISPLAY — STATIONARY POWER, MOTOR AND SLIP RING

REV A — electrically connected schematic; ratings marked TBD require measurement

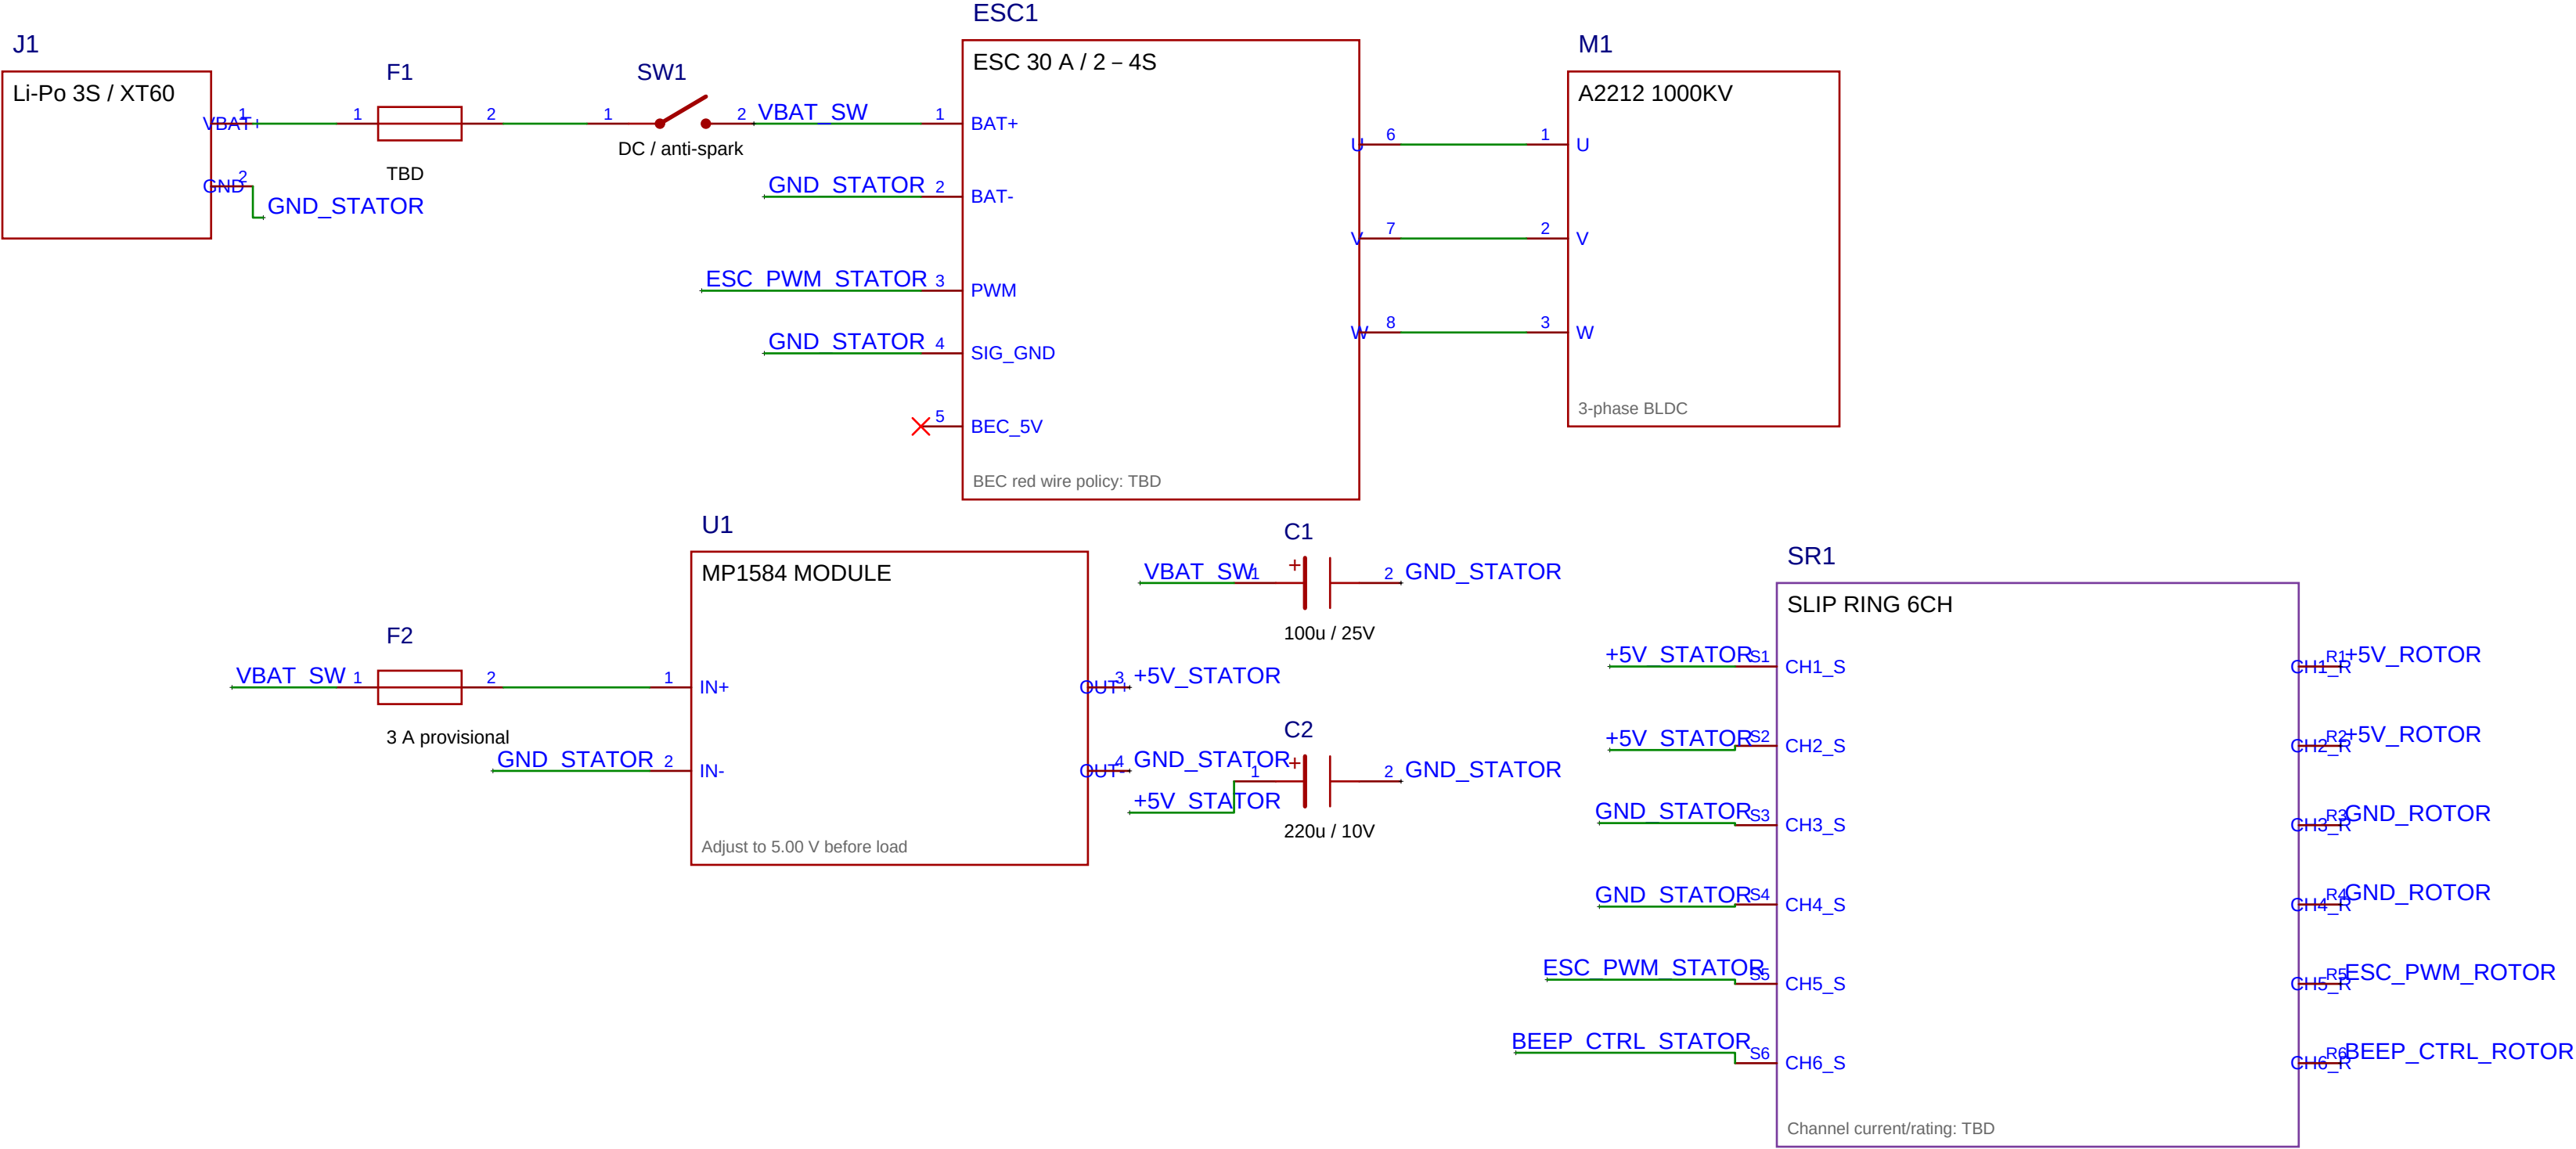


SAFETY AND OPEN VALUES

- F1/F2, wire gauge, switch rating and slip-ring current remain TBD until measurement.
- ESC BEC_5V is intentionally NC until the exact ESC wiring is confirmed.
- Motor and installed rotor must not be energized before enclosure and balance checks.
- Fit a flyback diode across BZ1 only if the selected buzzer is a magnetic load.

POWER RULES

- CH1+CH2 and CH3+CH4 are parallel paths only after continuity and resistance tests.
- Battery-to-ESC and motor phase wiring must use high-current connectors, not JST-XH.
- C1/C2 are local to MP1584. Each blade receives its own bulk capacitor on the rotor sheet.

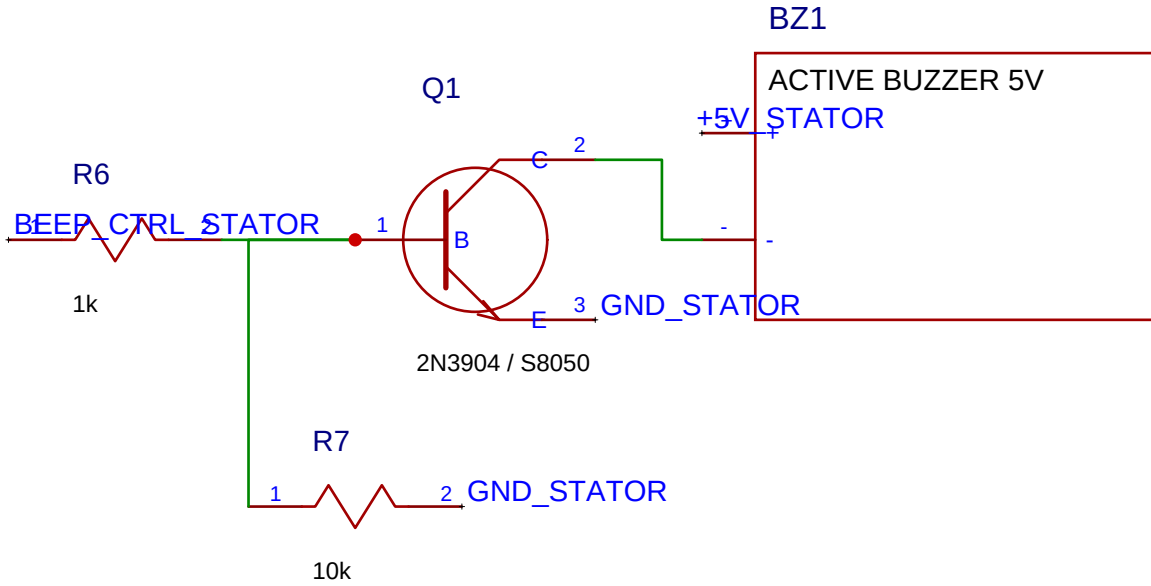

POV DISPLAY — ROTOR CONTROLLER, HALL SENSOR AND TWO APA102 BLADES

REV A — ESP32 remains on the rotor; DATA/CLOCK do not pass through the slip ring

