


## Surface Mounted Corner Protector, 3" Wing (75mm)

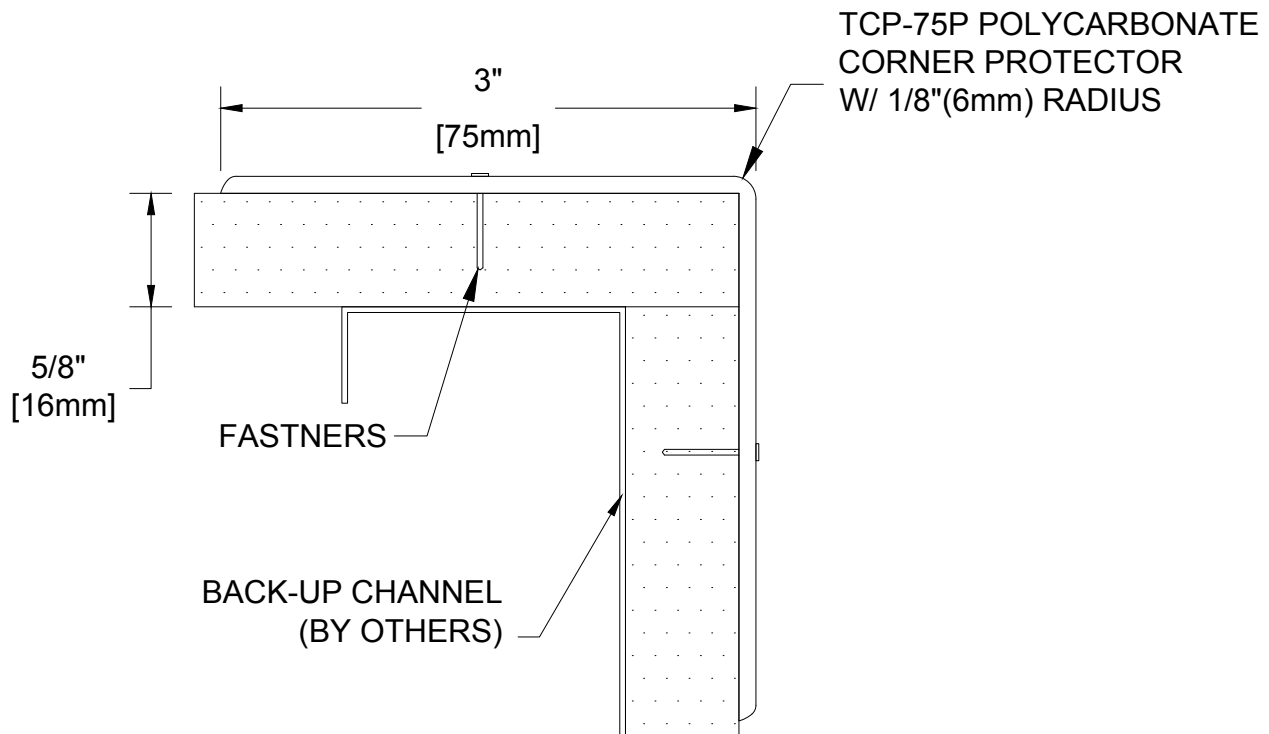

### Features

- Standard Lengths are 4' (1.2m) and 8' (2.4m).
- Rigid PVC Tensile Yield, 6100 psi as specified in ASTM D-638, wall thickness .080. (PETG if applicable CNDD)
- Chemical and Stain Resistance in accordance with ASTM D-543.
- Fungal and Bacterial Resistance in accordance with ASTM G-21 and ASTM G-22.
- Class "A" Fire Rating.

### Quick Installation

Our Polycarbonate corner protectors can be ordered with pre-drilled holes and screws as standard. Other options are self-stick tape or plain. A plain corner guard can be installed using construction adhesive such as Liquid Nails.

### Order Guide

Please refer to the Tepromark Order Guide for instructions on how to order specific lengths and colors for this product. This can be found in the back of your Tepromark catalog or on the website.

<b>Project:</b>		<b>Architect:</b>	
<b>Customer:</b>		<b>Contractor:</b>	
<b>Date:</b>	<b>Length:</b> FT            IN	<b>Color:</b>	<b>Qty:</b>