


## Surface Mounted Corner Protector, 1-1/8" Wing

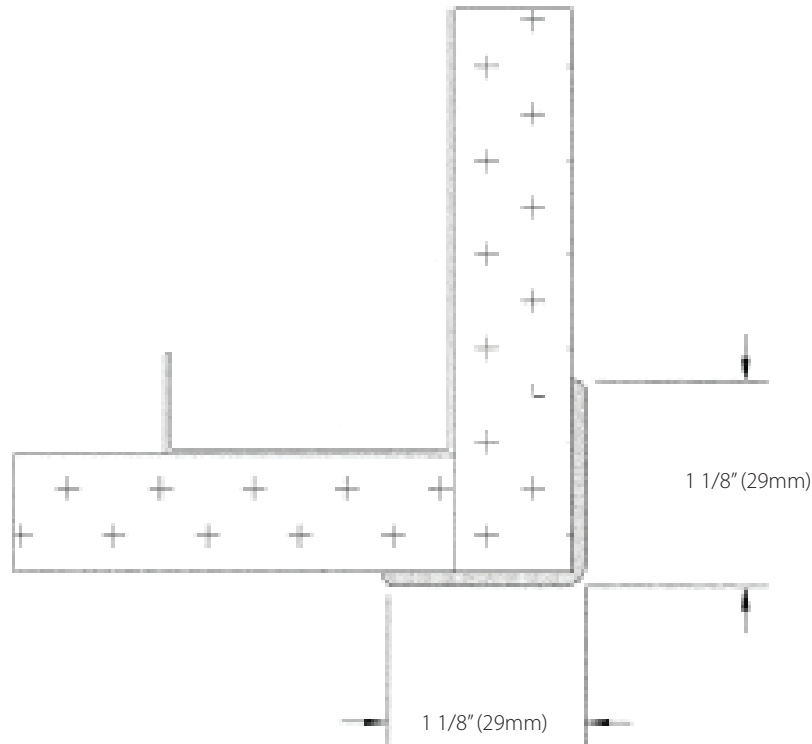

### Features

- Standard Lengths are 4' and 8'.
- Rigid PVC Tensile Yield, 6100 psi as specified in ASTM D-638, wall thickness .080. (PETG if applicable CNDD)
- Chemical and Stain Resistance in accordance with ASTM D-543.
- Fungal and Bacterial Resistance in accordance with ASTM G-21 and ASTM G-22.
- Class "A" Fire Rating.

### Quick Installation

Surface Mounted Corner Protectors can be installed using a PVC mastic (supplied by others), double sided tape, or screws (supplied by others).

### Order Guide

Please refer to the Tepromark Order Guide for instructions on how to order specific lengths and colors for this product. This can be found in the back of your Tepromark catalog or on the website.

<b>Project:</b>		<b>Architect:</b>	
<b>Customer:</b>		<b>Contractor:</b>	
<b>Date:</b>	<b>Length:</b> FT      IN	<b>Color:</b>	<b>Qty:</b>
<p>p 763.273.8484 / 800.645.2622 (US) f 763.273.8485 e sales@tepromark.com</p> <p style="text-align: right;"><b>tepromark.com</b></p>			