


TUBULAR TOUCH

Electronically operated self closing lavatory faucet, activated by touching the designated area in the faucet cap. For cold or premixed water. Filter included. The faucet will automatically shut off after a factory set flow time of 8 seconds would pass. The flow time is adjustable on site if required

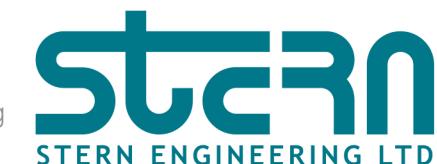

OPERATION

When a user touches the designated area in the middle of the faucet cap, a flow cycle of 8 seconds will be completed. If the user does not need more water, he can touch the designated area again to stop the water flow before the default flow time has passed.

APPLICATION

Wall mounted faucet combining an elegant minimalist design with anti vandal features. Enables an easy installation and is long lasting even in the harshest installation sites. Helps washrooms to stay cleaner and save water.



ORDERING INFORMATION		PRODUCT AT A GLANCE	
PRODUCT NAME	REF NUMBER	Installation	Wall Mounted
Tubular Touch B	350140	Power source:	IP67 Battery box with 6 AA 1.5V Alkaline batteries 9V transformer
Tubular Touch E	350130	Water flow	5 LPM / 1.32 GPM
Tubular Touch LB	350250	Water Supply	Cold or premixed water (1 inlet)
Tubular Touch LE	350150	Water temperature:	Max 70°.
		Operating pressure:	0.5 - 8.0 bar (7 - 116 PSI).



zoneTM
architectural products

0800 508 800 | 09 623 1699
www.zone.net.nz | info@zone.net.nz
4A Edwin Street, Mt Eden, Auckland
New Zealand