


## 2WFB-1

WALL TO WALL FIRE BARRIER  
2 HOUR RATED - 100% MOVEMENT  
OMEGA POINT LISTING: CEJ248P  
MAXIMUM OPENING 2" (51mm)

### NOTE 1:

2WFB WALL FIRE BARRIER  
MUST BE INSTALLED ON  
BOTH SIDES OF WALL,  
OR WITH DOUBLE PACKAGES  
INSTALLED FROM ONE SIDE OF JOINT,  
TO MAINTAIN 2 HOUR RATING.

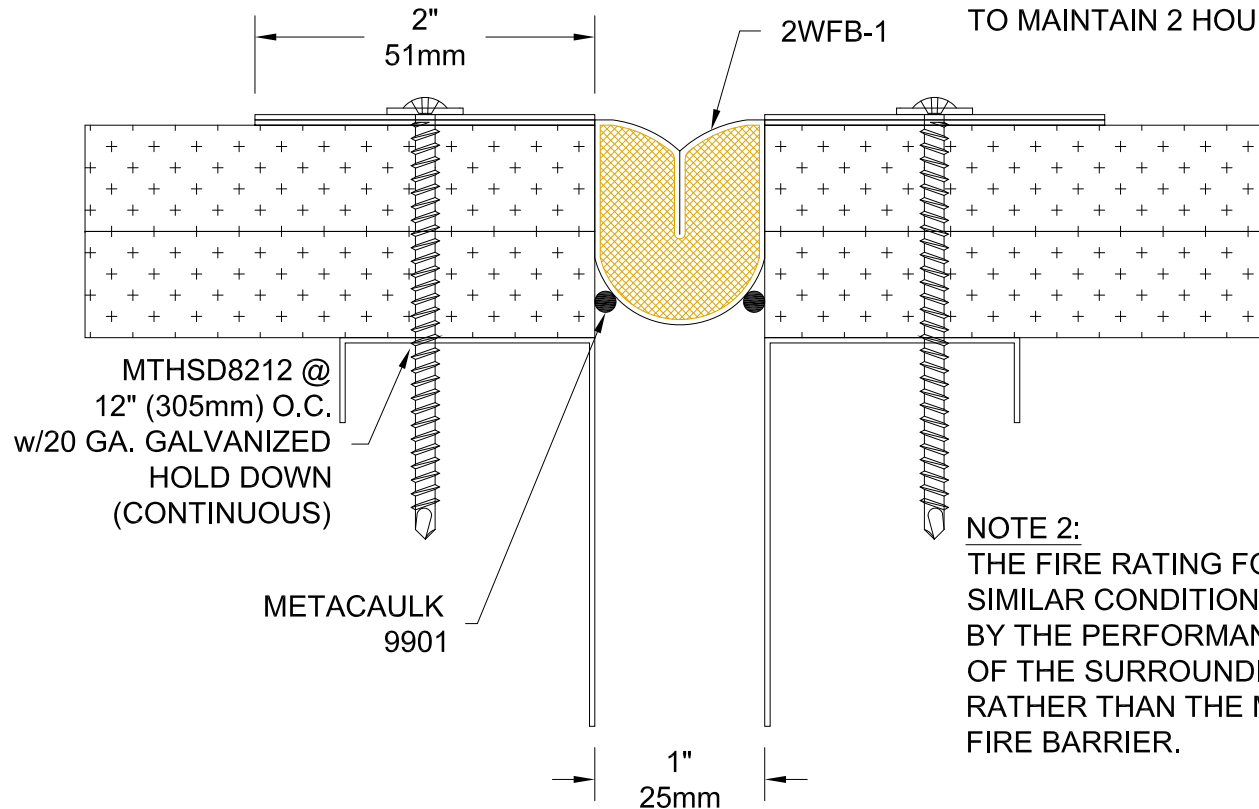

### NOTE 2:


THE FIRE RATING FOR THIS AND  
SIMILAR CONDITIONS IS DETERMINED  
BY THE PERFORMANCE CAPABILITIES  
OF THE SURROUNDING CONSTRUCTION  
RATHER THAN THE METAFLEX  
FIRE BARRIER.

Project:	
Customer:	
SO#	
Date:	
Page ____ of ____	Scale: NTS

Length	Qty.	Color

Drawn By: RJT

The information contained herein is the proprietary property of **BALCO, INC.** No portion of it may be reproduced by any means or used in any form except for the purpose for which it was furnished. All rights of design and invention are hereby reserved.



**BALCO INC**

2626 S. Sheridan PO Box 17249  
Wichita, Kansas 67217-0249 USA  
P: +1-316-945-9328 F: +1-316-945-0789