MF2H04F

PATENTS PENDING

METAMAT FLOOR TO FLOOR 2 HOUR RATED FIRE BARRIER SYSTEM UL LISTING: FF-D-0063 MAX OPEN = 4" (102mm)

APPLICATION:

FOR USE WITH METAL EXPANSION JOINT COVERS WITH ANCHORS AT 20" (508mm)


NOTES:

FIRE RATING IS DETERMINED NOT ONLY BY THE METAMAT FIRE BARRIER, BUT ALSO BY THE PERFORMANCE CAPABILITIES OF THE SURROUNDING CONSTRUCTION

LENGTHS:

AVAILABLE IN 20FT AND 40FT ROLLS

PLEASE SPECIFY:_____

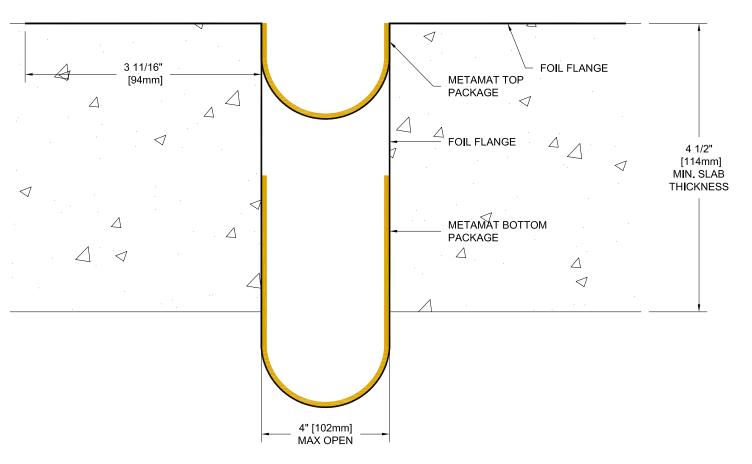

Drawn By: JLH

Project:	Length	Qty.	Color
Customer:			
SO#			
Date:			
Pageof Scale: NTS			

The information contained herein is the proprietary property of **BALCO, INC.** No portion of it may be reproduced by any means or used in any form except for the purpose for which it was furnished. All rights of design and invention are hereby reserved.

BALCO INC

2626 S. Sheridan PO Box 17249 Wichita, Kansas 67217-0249 USA P: +1-316-945-9328 F: +1-316-945-0789

K:\FireBarrier\Metaflex 5000\MF2H04F.dwg [Layout1] February 08, 2007 - 8:54am jasonh

REV. - 2/8/07