# TRENDY
# TOUCH-FREE ELECTRONIC LAVATORY FAUCET

## SPECIFICATIONS

Touch-free electronic faucet for deck-mounted installations. Cold or premixed water. Activated by Infrared sensor. Chrome plated body, other finishes available. Includes a low battery indicator. The Trendy line has an Infrared sensor and a solenoid valve inside the product's body for added vandal resistance. 24 hour mandatory hygiene flush can be provided upon request. Adjustable setting by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings.

## OPERATION

Touch-free electronic faucet. The faucet is automatically activated when the users place their hands in the sensor range and stops when the users remove their hands.
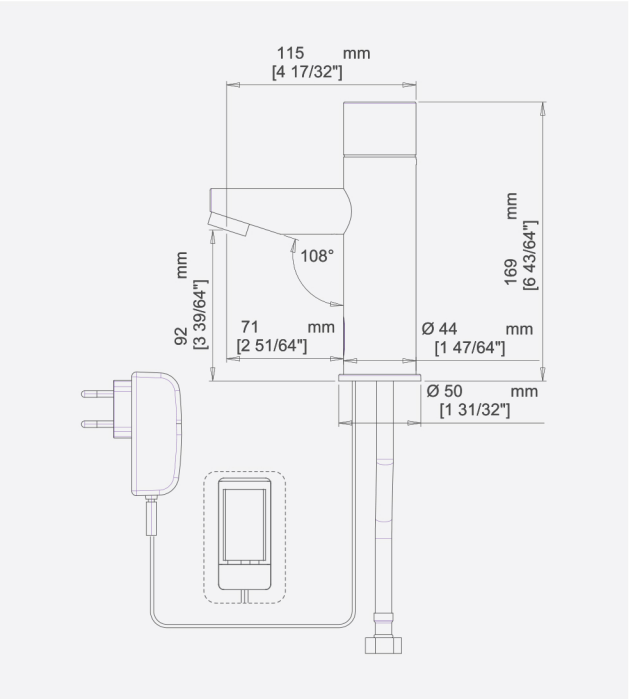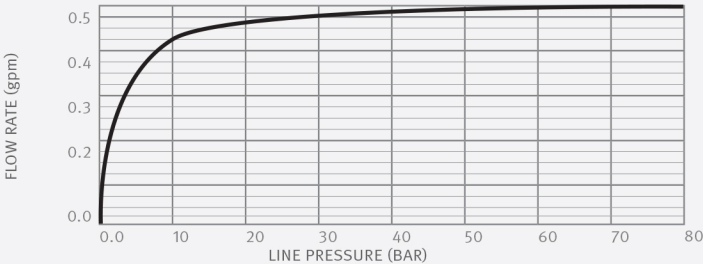
## APPLICATION

Deck-mounted faucets. Combining an elegant minimalist design with anti-vandal features. Easy installation. Long lasting even in the harshest installation sites. Helps washrooms stay clean and saves water. Prevents cross contamination. Ideal for stadiums, train and bus stations and highway rest stops.

## PRODUCT AT A GLANCE

| | |
|---|---|
| Installation | Deck-mounted |
| Power Supply | • 9V battery  • 9V transformer |
| Operating pressure | 0.5-8.0 bar / 7.0-116.0 PSI |
| Water supply | Cold or premixed water |
| Water flow | 6 LPM / 1.58 GPM - SSR PCA stream |
| Water Saving Options | 4 LPM / 1 GPM ; 3 LPM / 0.8 GPM 1.89 LPM / 0.5 GPM ; 1.3 LPM 0.35 GPM - PCA spray |
| Water temperature | 70ºC Maximum |
| Security time | Auto shutoff after 90 seconds. adjustable by remote control |

### FLOW RATE vs PRESSURE



## ORDERING INFORMATION

| MODEL | CODE | POWER |
|---|---|---|
| TRENDY B | 239000 | 9V battery |
| TRENDY E | 239100 | 9V transformer |

## OPTIONS

| OPTION | CODE |
|---|---|
| Remote control | 07100005 |
| Matching battery-powered soap dispenser | 250920 |
| Matching transformer-powered soap dispenser combination | 250910 |
| Lead free version | Upon request |

Dimensions:
115 mm [4 17/32"]
169 mm [6 43/64"]
92 mm [3 39/64"]
71 mm [2 51/64"]
108°
Ø 44 mm [1 47/64"]
Ø 50 mm [1 31/32"]